




Ives – Residential

#07 WINDOW LOCKS

- Material Brass or Aluminum
- Vertical and horizontal cam action for snug non rattling fit
- Heavy gauge spring for long wearing action
- Meets ANSI A156.16
- Include screws

Stocked Product

07A3..... Bright Brass
07A92..... Aluminum
07MB..... 605, 613, 619, 625, 626

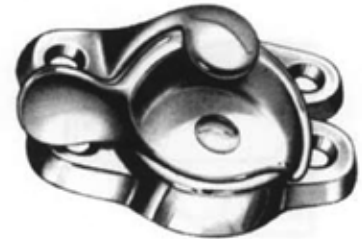

Base 15/16" x 2-5/8"
Strike 5/8" x 2-5/8"

#2 ELBOW CATCH

Plate 1-3/8" X 5/8"
Strike 1-3/16" X 5/8"
Material Brass or Aluminum

Stocked Product

2A3..... Bright Brass
2A92..... Aluminum
2MB..... 605



#25 SCREEN DOOR PULL

CTC 4-1/8"
Material Aluminum
Overall length 4-7/8"
Projection 1-5/32"

Stocked Product

25A92 Aluminum



#026 BAR WINDOW LIFT

Base 1-1/8" x 4"
Material Aluminum

Stocked Product

026A3..... Bright Brass






Ives - Residential

#42 POCKET DOOR BOLT

Plate size 3-1/16" x 1-1/8"
Mortise depth 5/8"
Material Solid brass

Stocked Product

Finishes: 605, 613, 625, 626




#S48 MORTISE BOLT

Backset 1-3/4"
Throw 1/2"
Material Solid brass

Stocked Product

Finishes: 605

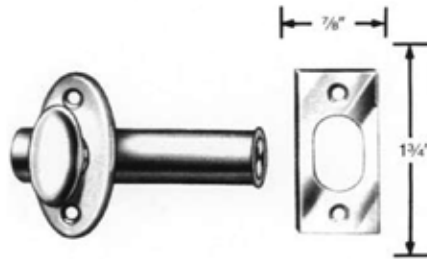

#059 HAND RAIL BRACKET

Base 2-1/4" (H) x 1-3/8" (W)
Base to center of rail 2-7/16"
Material Solid brass or aluminum

Stocked Product

059A14 Bright Nickel
059A3 Bright Brass
059A5 Satin Brass
 Blackened
059A92 Aluminum
059B Solid Brass



#59 HAND RAIL BRACKET

Base 2-13/16" (H) x 1-1/2" (W)
Base to center of rail 2-3/4"
Material Solid brass or aluminum

Stocked Product

59A3 Bright Brass
59A5 Satin Brass Blackened
59A92 Aluminum
59MB 605, 619






Ives – Residential

#060 FLEXIBLE DOOR STOP

Projection 3"
Material Steel

Stocked Product

060 F14Bright Nickel
060 F3Bright Brass
060 F5Satin Brass Blackened
060 F10BDuro

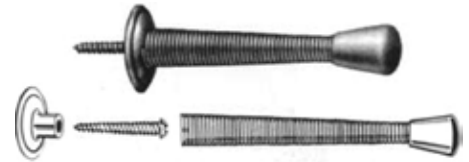

#60 DOOR STOP

Projection 3-3/4"
Material Solid brass or aluminum

Stocked Product

60A3Bright Brass
60A92Aluminum




#061 FLEXIBLE DOOR STOP

Projection 4"
Material Steel

Stocked Product

061 F14Bright Nickel
061 F3Bright Brass
061 F5Satin Brass Blackened

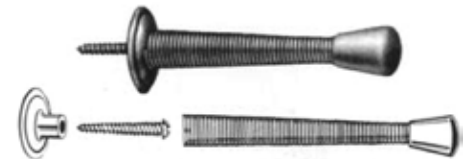

#61 DOOR STOP

Projection 3"
Material Solid brass (SB), aluminum (M), or steel material

Stocked Product

61A92Aluminum
61A3Bright Brass
61A14Bright Nickel
61A10BOil Rubbed Bronze
61MB619, 625





Ives – Residential

#62 DOOR STOP

Projection 4-1/2"
Material Aluminum

Stocked Product

62A3.....Bright Brass
62A92.....Aluminum




#69 HINGE PIN DOOR STOP

Door opening adjustments 70° to 100° Material Steel

Stocked Product

69F10B.....Oil Rubbed Bronze
69F14.....Bright Nickel
69F15.....Satin Nickel
69F3.....Bright Brass
69F5.....Satin Brass Blackened

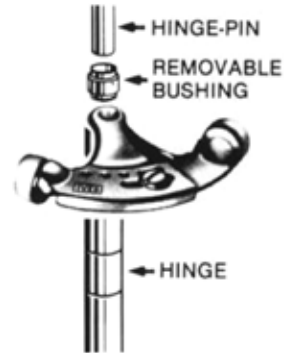


#70 HINGE PIN DOOR STOP

Door opening adjustments 85° to 125°
Material Brass (B) or aluminum (A)

Stocked Product

70A14.....Bright Nickel
70A5.....Satin Brass Blackened
70A3.....Bright Brass
70A92.....Aluminum
70B.....619, 620, 625

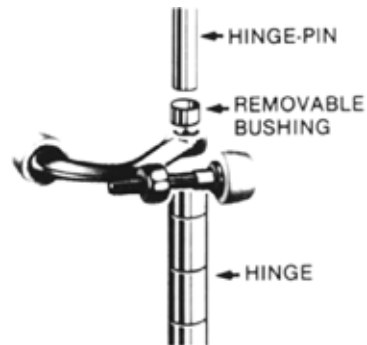

#221 FLUSH PULL

Bore 2-1/8"
Overall Diameter 2-7/16"
Material Solid brass

Stocked Product

221B: 605, 609, 613, 619, 620, 625, 626





Ives – Residential

#223 FLUSH PULL

Size 3-9/16" x 1-5/16" x 1/2"
Material Solid brass

Stocked Product

223B: 605, 613, 619, 625, 626



#227 FLUSH PULL

Overall size 3-5/8" x 1-3/4" x 9/16"
Material Solid brass

Stocked Product

227B: 605, 613, 626




#261 Flush Bolt

- Polished cast brass.
- A compact flush bolt of high quality incorporating most of the features of the superb No. 262 Flush Bolt.
- Deep cup provides good finger hold, allows easy operation.
- Brass bolt automatically held in retracted or projected position by unique spring design.
- Features sharp, crisp lines and superior finish.
- Packed with screws for bolt and strike.

P/N261
Rod Backset15/32"
Dia. of Bolt Head ...5/16"
Throw3/4"

Stocked Product

605, 613, 619, 620

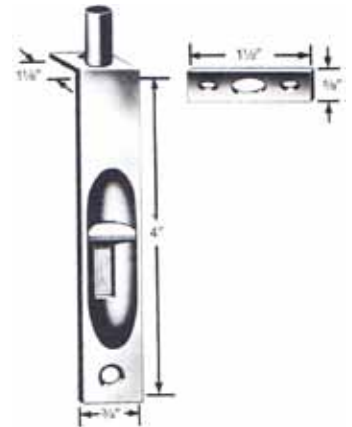




Ives – Residential

#335 Heavy Duty Roller Catch

Face plate 2-1/4" x 7/8"
Bore 3/4" x 1-3/4"
Strike 2-1/4" x 1-5/8"
Material Solid brass or steel

Stocked Product

335F3.....Bright Brass
335B.....605, 613, 619, 625, 626




#336 Heavy Duty Roller Catch

P/N 336
Face Plate 2-1/4" x 7/8"
Bore 3/4" x 1-3/4"
Strike 2-1/4" x 7/8"
Lip 1-1/8" to Center

Stocked Product

605, 613, 619, 622, 626



#338 Roller Catch

P/N 338
Case 2" x 1-1/16"
Strike 1-3/4" x 3/4"

Stocked Product

F14 Bright Nickel




#345 Adjustable Ball Catch

P/N 345
Face Plate 1-1/2" x 3/4"
Bore 9/16" x 7/8"
Strike 1-1/2" x 25/32"
Lip 13/32" to Center

Stocked Product

605, 613, 619






Ives – Residential

#346 Dual Adjustable Ball Catch

P/N 346
Face Plate 2-1/8" x 1"
Bore 7/8" x 1-1/4"
Strike 2-1/8" x 1-1/16"
Lip 9/16" to Center

Stocked Product

605, 613, 619




#347 BALL CATCH

Face plate 2-1/8" x 1"
Bore 7/8" x 1-1/4"
Strike 2-1/8" x 1-3/8"
Material Solid brass

Stocked Product

347B.....605, 609, 619, 625, 626

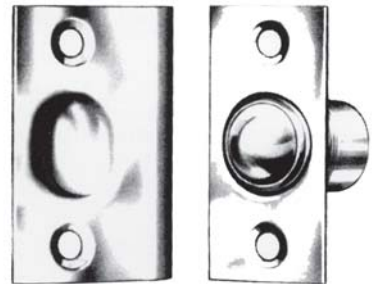


#348 / #349 BALL CATCH

348	Face Plate 2-1/8" X 1"	349	Face Plate 2-1/8" X 1"
	Bore 7/8" X 1-1/4"		Bore 7/8" X 1-1/4"
	Strike 2-1/8" X 1-1/16"		Strike 2-1/8" X 1-3/8"
	Lip 9/16" to Center		Lip 7/8" to Center

Stocked Product

348B.....605, 613, 619, 625, 626

349B.....605, 613, 619, 625, 626

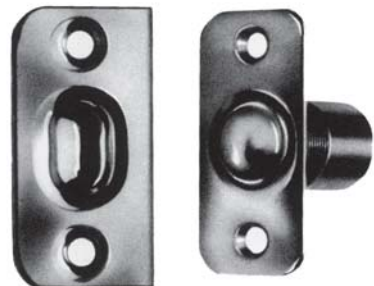

#571 COAT & HAT HOOK

Projection 3"
Base 1-3/4" (H) x 1-7/32" (W)
Material Aluminum

Stocked Product

A3.....Bright Brass



#581 WARDROBE HOOK

Projection 1-11/16"
Base 1-1/8" (H) x 1-1/8" (W)
Material Brass or aluminium

Stocked Product

581A3.....Bright Brass

581A92Aluminum

58MB.....605, 613, 625, 626





Ives – Residential

#698 DOOR VIEWER / U698 UL

190° for 1-3/8" - 2-1/8" door
9/16" hole size

Stocked Product

698.....605, 626

U698.....605, 626



#990 PASSAGE

- Solid brass body
- Fits door 1-3/8" to 1-1/2"
- Pre-assembled for doors opening left to right. Plates are reversible for opening left to right
- Solid brass strike plate
- Decorative coined edges

Stocked Product

605, 613, 619, 625, 716



#991 PRIVACY

- Solid brass body
- Fits door 1-3/8" to 1-1/2"
- Pre-assembled for doors opening left to right.
- Solid brass strike plate and turn knob
- Decorative coined edges

Stocked Product

605, 613, 619, 625, 716




3000 5" CONTEMPORARY HOUSE NUMBERS

- Cast brass
- 5" high
- Bold, thick design is easy to see from a distance
- Brass screws included

Stocked Product

613, 619





Ives – Residential

Architectural Door Trim


8400 SERIES KICK PLATES (RG Residential Grade)

- .037 gauge residential grade
- Stainless steel or aluminum material

Kick plates protect the bottom of the push side of doors subject to scuffing from foot traffic.

Stocked Product

6" x 30" 505, 613, 619, 625
6" x 34" 505, 613, 619, 625
8" x 34" 505, 613, 619, 625



Ives – Commercial

Architectural Door Trim

8200 SERIES PUSH PLATE


- Made from the finest architectural aluminum, brass, and stainless steel.
- All aluminum, brass, and stainless steel Push Plates meet ANSI A156.6 requirements for .050" thickness.
- Each Push Plate is packaged individually wrapped with mounting screws.

Stocked Product

Finishes: 10B, 32D

Size: 4" x 16"

Contact our sales department for availability of other finishes and sizes.




8200 Push Plate



Ives – Commercial Architectural Door Trim

#8300 PULL PLATES

- Made from the finest architectural aluminum, brass and stainless steel.
- All aluminum, brass, and stainless steel Pull Plates meet ANSI A156.6 requirements for .050" thickness.
- Each Pull Plate is packaged individually wrapped with mounting screws.



Stocked Product

Finishes: 10B, 32D

Size: 4" x 16"

6" Pull Center to Center, 8" Pull Center to Center


8300 Pull Plate 6" C to C

8302 Pull Plate 8" C to C

Series 8400 DOOR PROTECTION PLATES .050" Thickness (Commercial Kick plates)

Features:

- Door Protection Plates are fabricated from the finest architectural brass, and stainless steel.
- All aluminum, brass, bronze and stainless steel Door Protection Plates meet ANSI A156.6 requirements for .050" thickness.
- Optional Beveling-For beveling of top and two sides of plates suffix with B3E, and for beveling of four sides suffix with B4E, Special order only
- Each plate is packaged carefully wrapped in strong kraft paper with #6 x 5/8" oval head, undercut sheet metal screws plated to match, for easy installation on hollow metal, laminate, or wood doors. All plates are packaged in heavy duty corrugated cardboard.



Stocked Product

Finishes: 10B, 32D

Sizes: 8" x 34", 10" x 34", 12" x 34"

Kick Plates

- Protect the bottom of the push side of doors subject to scuffing from foot traffic.
- Recommended for all doors subject to normal use (especially doors using a closer).



Ives – Commercial Full Mortise Hinges – 3 Knuckle

3PB1 Steel with steel pin.

3PB1 Stainless Steel with stainless steel pin. (630 finish only)

PLAIN BEARING • LOW FREQUENCY • STANDARD WEIGHT

For use on Medium Weight Doors with Low Frequency Usage, not intended for use with door closing devices

- Hinges tested to ANSI - A156.1.
- Dimensions & tolerances conform to ANSI - A156.7.
- 3PB1 Steel Description conforms to ANSI - A8133.
- 3PB1 Stainless Description conforms to ANSI - A5133.
- Packed with wood and machine screws.

Size (Inches)	Size (MM)	Gauge
4.5 x4.5	114x114	.134



Stocked Finishes

26D, 32D, USP
4 1/2" x 4 1/2" size only

3CB1 Steel with steel pin.

3CB1 Stainless Steel with Stainless Steel pin. (630 finish only)Non- Removable Pin suffix "NRP"

CONCEALED BEARING • MEDIUM FREQUENCY • STANDARD WEIGHT

For use on Medium Weight Doors with Medium Low Frequency Usage

- Hinges tested to ANSI - A156.1.
- Dimensions & tolerances conform to ANSI - A156.7.
- 3CB1 Steel description conforms to ANSI - A8112.
- 3CB1 Stainless description conforms to ANSI - A5112.
- Packed with wood and machine screws.

Size (Inches)	Size (MM)	Gauge
4.5 x4.5	114x114	.134



Special order

- Contact sales department for other sizes & finishes.

Stocked Finishes

26D, 32D, USP
4 1/2" x 4 1/2" size only
Also stocked NRP



Ives – Commercial Full Mortise Hinges – 3 Knuckle

5PB1 Steel with steel pin

5PB1 Stainless Steel with stainless steel pin (630 finish)

Non-Removable Pin Suffix “NRP”

PLAIN BEARING • LOW FREQUENCY • STANDARD WEIGHT


For use on Medium Weight Doors with Low Frequency Usage, not intended for use with door closing devices.

- Hinges tested to ANSI - A156.1.
- Dimensions & tolerances conform to ANSI - A156.7.
- Packed with wood and machine screws.

Size (Inches)	Size (MM)	Gauge
4.5 x 4.5	114 x 114	.134

Stocked Finishes

26D, 32D, USP
4 1/2" x 4 1/2" size only
Also stocked NRP



5BB1 Steel with steel pin

5BB1 Stainless Steel with stainless steel pin (630 finish only)

Non-Removable Pin suffix "NRP"

2 BALL BEARING • MEDIUM FREQUENCY • STANDARD WEIGHT

For use on Standard Weight Doors with Medium Frequency Usage

- Hinges tested to ANSI - A156.1.
- Dimensions & tolerances conform to ANSI - A156.7.
- 5BB1 Steel description conforms to ANSI - A8112.
- 5BB1 Stainless description conforms to ANSI - A5112.
- Packed with wood and machine screws.

Size (Inches)	Size (MM)	Gauge
4.5 x 4.5	114 x 114	.134
4.5 x 4	114x102	.134
5 x 4 1/5	127 x 114	.134

Stocked Finishes

26D, 32D, USP
4 -1/2" x 4", 4 1/2" x 4 1/2", 5" x 4-1/2"
NRP: 4 1/2" x 4 1/2" size only





Ives – Commercial

Full Mortise Hinges – 5 Knuckle

5BB1HW Steel with steel pin

5BB1HW Stainless Steel with stainless steel pin (630 finish only)

Non-Removable Pin suffix “NRP” strike

4 BALL BEARING • HIGH FREQUENCY • HEAVY WEIGHT

For use on Heavy Weight Doors or High Frequency Usage

- Hinges tested to ANSI - A156.1.
- Dimensions & tolerances conform to ANSI- A156.7.
- 5BB1 HW Steel description conforms to ANSI - A8111.
- 5BB1 HW Stainless description conforms to ANSI - A5111.
- Packed with wood and machine screws.

Size (Inches)	Size (MM)	Gauge
4.5 x 4.5	114 x 114	.180

Stocked Finishes

26D, 32D, USP

4 1/2" x 4 1/2" size only

Also stocked NRP





Ives – Commercial

FLUSH BOLT



AUTOMATIC FOR METAL *FB31P* PAIR

Top and bottom bolts
Both bolts are non-handed, but are not identical. The top bolt has no spring tension, resulting in lower actuation force with a smoother operation.

Dimensions:

Body Size: 1" x 6-3/4" x 2" Deep
Guide Size: 1" x 1-27/32" x 27/32" x 3/32" Thick
Strike Size: 15/16" x 2-1/4" x 1/16" Thick
Rub Plate Size: 1-1/4" x 1-11/16" 3/64" Thick
Auxiliary Fire Latch Size: 1" x 1-3/4" x 3-1/4" Deep

Stocked Product

10B, 32D



AUTOMATIC FOR WOOD *FB41P* PAIR

Top and bottom bolts
Both bolts are non-handed, but are not identical. The top bolt has no spring tension, resulting in lower actuation force with a smoother operation.

Dimensions:

Body Size: 1" x 8-1/2" x 2" Deep
Guide Size: 1" x 6" x 1/8" Thick
Strike Size: 15/16" x 2-1/4" x 1/16" Thick
Rub Plate Size: 1-1/4" x 1-11/16" 3/64" Thick
Auxiliary Fire Latch Size: 1" x 1-3/4" x 3-1/4" Deep

Stocked Product

10B, 32D



CONSTANT LATCH FLUSH BOLTS *FB51P* PAIR

Top and bottom bolts
FB51P combines FB51T constant latching top bolt with FB31B automatic bottom bolt. Non-handed.

Dimensions:

Body Size: 1" x 6-3/4" x 2" Deep
Guide Size: 1" x 1-27/32" x 11/16" x 3/32" Thick
Strike Size: 15/16" x 2-1/4" x 1/16" Thick
Rub Plate Size: 1-1/4" x 1-11/16" 3/64" Thick
Auxiliary Fire Latch Size: 1" x 1-3/4" x 3-1/4" Deep

Stocked Product

10B, 32D



Ives – Commercial

FB258 EXTENSION FLUSH BOLT

Specifications:


12 inch extension rod
Extruded brass material with aluminum side
and steel bolt head
Rod Backset 5/8"
Throw: 3/4"

Stocked Product

US3, 10B, 15, 15A, 26, 26D

Top or bottom bolts

- # FB258N is used as top or bottom flush bolt to secure the inactive leaf of a pair of swinging non-fire rated doors where a UL Label is not required.

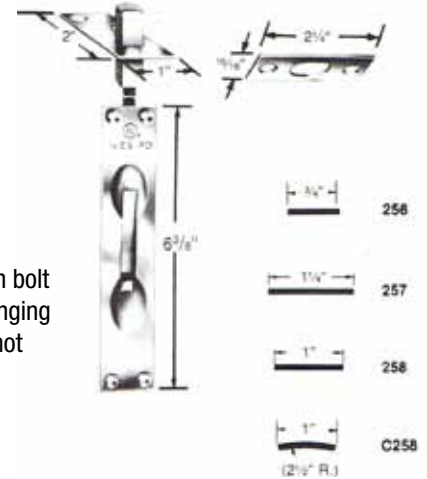

FB358 (old number FB6W) MANUAL FLUSH BOLT WOOD

Dimensions:


Body Size: 1" x 6-3/4" x 1-3/8" Deep
Guide Size: 1" x 2-1/2" x 5/64" Thick
Strike Size: 15/16" x 2-1/4" x 5/64" Thick

Stocked Product

10B, 26D

Top or bottom bolts

- UL Listed 90 minutes on 8'0" x 10'0" opening
- Non-handed.
- Bolts have 3/4" throw with a 7/8" vertical adjustment.
- Meets ANSI/BHMA A156.16, L04261.

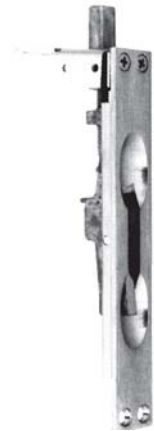

FB458 (old number FB6) MANUAL FLUSH BOLT METAL

Dimensions:

Body Size: 1" x 6-3/4" x 1-13/8" Deep
Guide Size: 1" x 2" x 5/64" Thick
Strike Size: 15/16" x 2-1/4" x 5/64" Thick
Rod: 1/4-20 threaded rod

Stocked Product

10B, 26D

Top or bottom bolts

- FB458 UL Listed fire doors up to 3 hours
- Bolt tip is 1/2" diameter
- Bolts have 3/4" throw with a bolt backset of 3/4"
- Standard rod length is 12"
- Meets ANSI/BHMA A156.6, L04251.



DP2 - Dust proof strike

Face plate 1-5/8" x 3-1/2" x 1/8" Thick

Stocked Product

10B, 26, 26D, US3






Ives – Floor Stops & Holders

FS13 Dome Stop

- Standard FS13 for use where no threshold is used.
- Heavy-Duty Cast Dome Stops constructed of brass.
- Unique riser design of R14 (below) allows easy conversion to threshold application.
- Units are packed with fasteners sufficient for mounting in all types of floor construction, including concrete.
- Meets ANSI/BHMA 156.6, L12141.

Stocked Product
605, 613, 625, 626




Overall Height 1"
Base Height .. 5/32"
Base Diameter 1-3/4" Round

FS17 Dome Stop

- One piece dome stop for use with thresholds.
- Heavy-Duty Cast Dome Stops constructed of brass.
- Units are packed with fasteners sufficient for mounting in all types of floor construction, including concrete.
- Meets ANSI/BHMA 156.1, L12161.

Stocked Product
605, 613, 625, 626




Overall Height 1-11/32"
Base Height .. 1/2"
Base Diameter 1-3/4" Round

R14 Riser only

- Adapts the FS13 Dome Stop to threshold use.
- Brass Die Cast Construction.
- Meets ANSI/BHMA 156.1, L12161 when used with FS13 Dome Stop.

Stocked Product
605, 613, 625, 626

Not Included



Riser Height .. 5/16"
Base Diameter 1-3/4" Round

FS436 Floor Door Stop

- Cast material
- For doors without threshold
- Gray, non-marring rubber bumper
- Conforms to Fed. Spec. Nos. 1330 with wood screws and 1330E with expansion shield
- Conforms to ANSI A156.16 L12141 for brass and L32141 for aluminum
- Packed with wood screw and plastic anchor

Stocked Product
605, 613, 619, 625, 626





Ives – Floor Stops & Holders

FS438 Floor Door Stop

- Cast material
- For doors with threshold or undercut doors
- Gray, non-marring rubber bumper
- Conforms to Fed. Spec. Nos. 1330A with wood screws and 1330AE with expansion shield
- Conforms to ANSI A156.16 L12141 for brass and L32141 for aluminum



Stocked Product

613, 625, 626

FS441 Floor Door Stop

- Cast material
- Accommodates doors undercut up to 1-1/2"
- Designed for commercial applications
- Non-marring rubber tip
- Conforms to ANSI A156.16
L12131 for brass and
L32161 for aluminum
- Packed with expansion shield and Tampin
- 2-11/16" x 1-5/8" x 2-1/8" (L x W x H)




Stocked Product

605, 613, 619, 625, 626

FS442 Floor Stop

- Designed to blend well with all types of construction and provide a minimum of hindrance to cleaning efforts.
- Accommodates door undercut up to 2".
- Heavy-Duty cast brass or aluminum construction.
- Non-marring rubber bumper.
- FS442 packed with expansion shield and tampin.
- FS442 meets ANSI/BHMA 156.16, L12131 for brass and L32131 for aluminum.



Stocked Product

605, 613, 619, 620, 625, 626

Overall Height 2-7/8"
Base Height .. 2" x 3/4"
Base Depth ... 1" x 5/8"

FS444 Heavy Duty Floor Stop

- Cast material
- Accommodates doors undercut up to 2-1/2"
- Designed for commercial applications
- Non-marring rubber tip
- Conforms to Fed. Spec. No. 1328E
- Conforms to ANSI A156.16
L12131 for brass and
L32131 for aluminum
- Packed with expansion shield and lead shield
- 2-1/2" x 3" (Dia. x H)



Stocked Product

605, 613, 619, 625, 626



Ives – Floor Stops & Holders

FS446 HD Floor Door Stop & Holder

- Cast material
- Accommodates doors undercut up to 2-1/2"
- Designed for high traffic areas in commercial applications
- Resilient, non marring rubber tip
- Conforms to Fed. Spec. No. 1329E
- Conforms to ANSI A156.16 L11371 for brass and L31371 for aluminum
- Packed with expansion shield and lead shield

Stocked Product

613, 626



FS448 HD Floor Door Stop

- Cast material
- Accommodates doors undercut up to 2-1/2"
- Designed for commercial applications
- Non marring rubber tip
- Conforms to Fed. Spec. No. 1328
- Conforms to ANSI A156.16 L12121 for brass and L32121 for aluminum
- Packed with wood screw
- 2-1/2" x 3" (Dia. x H)

Stocked Product

613, 626



FS450 HD Floor Door Stop & Holder

- Cast material
- Accommodates doors undercut up to 2-1/2"
- Designed for high traffic areas in commercial applications
- Resilient, non marring rubber tip
- Conforms to Fed. Spec. No. 1329
- Conforms to ANSI A156.16 L11361 for brass and L31361 for aluminum
- Packed with wood screws
- 2-1/2" x 3-5/8" (Dia. x H)

Stocked Product

613, 626



FS455 Door Holder

- Cast brass or aluminum construction.
- Non-marring rubber shoes have corrugated bottoms to provide secure grip and a shank which forms its own thread when screwed into threaded cavity of holder. When worn, shoes are easily replaced.
- Door-to-floor clearances of 2' or less.
- Meets ANSI/BHMA 156.16, L11382 for brass and L31382 for aluminum.
- Plate Height 1" x 3/4"
- Plate Width 1" x 3/4"



Stocked Product

605, 613, 619, 625, 626




Ives – Floor Stops & Holders

WS401 CVX & CCV Wall Bumpers

- Constructed in heavy-duty cast brass or aluminum base.
- Special retainer cup makes rubber tamper resistant.
- The WS401 CVX unit is designed with a convex rubber bumper, packed with wood screw and plastic anchor.
- The WS401 CCV unit is designed with a concave rubber bumper which avoids damage to locks with projecting buttons, packed with wood screw and plastic anchor.
- Designed with a convex rubber bumper packed with screw and drywall anchor.
- Unit is designed with a concave rubber bumper which avoids damage to locks with projecting buttons and is packed with screw and drywall anchor.
- WS401 CVX meets ANSI/BHMA 156.16 L12101 for brass and L32101 for aluminum.
- WS401 CCV meets ANSI/BHMA 156.16 L12251 for brass and L32251 for aluminum.



WS401CVX



WS401CCV

Stocked Product

605, 613, 619, 625, 626


WS406CVX

Convex Wall Door Stop with Plastic Anchor

- Wrought material
- Factory assembled backplate
- Concealed mounting
- Easy installation by inserting screw through small hole in rubber
- Conforms to ANSI A156.16 L22101 for brass, L42101 for aluminum and L52101 for stainless steel
- Packed with wood screw and plastic anchor

Stocked Product

613, 625, 630

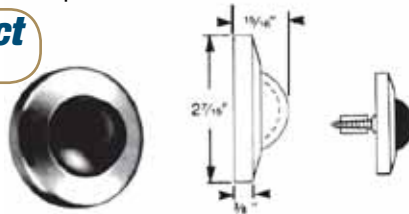


WS407CVX

Convex Wall Door Stop with Plastic Drywall Anchor

- Wrought material
- Factory assembled backplate
- Concealed mounting
- Easy installation by inserting screw through small hole in rubber
- Conforms to ANSI A156.16 L22101 for brass, L42101 for aluminum and L52101 for stainless steel
- Packed with wood screw and plastic anchor

Stocked Product

613, 625, 630

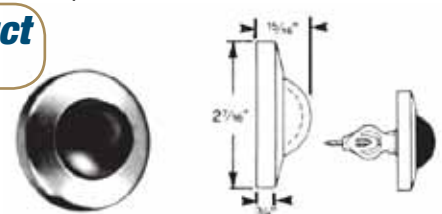


WS406CCV Concave Wall Door Stop with Plastic Anchor

- Wrought material
- Concave rubber permits knob to strike stop without damaging or engaging lock mechanism
- Factory assembled backplate
- Concealed mounting
- Easy installation by inserting screw through small hole in rubber
- Conforms to ANSI A156.16 L22251 for brass, L42251 for aluminum and L52251 for stainless steel
- Packed with wood screw and plastic anchor

Stocked Product

613, 625, 630

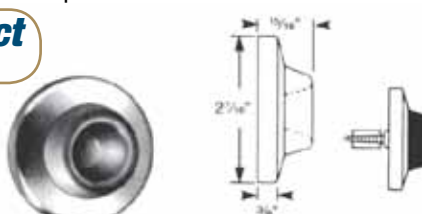


WS407CCV Concave Wall Door Stop with Plastic Drywall Anchor

- Wrought material
- Concave rubber permits knob to strike stop without damaging or engaging lock mechanism
- Factory assembled backplate
- Concealed mounting
- Easy installation by inserting screw through small hole in rubber
- Conforms to ANSI A156.16 L22251 for brass, L42251 for aluminum and L52251 for stainless steel
- Packed with plastic drywall anchor and screw

Stocked Product

613, 625, 630

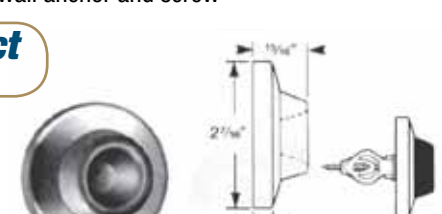



Ives – Floor Stops & Holders

WS443 HD Wall Door Stop

- Cast material
- Designed for commercial applications
- Non-marring rubber tip
- Conforms to Fed. Spec. No. 1320E
- Conforms to ANSI A156.16 L12021 for brass and L32021 for aluminum
- Packed with expansion shield and lead shield
- 2-1/4" x 3-5/8" (Dia. x Proj.)



Stocked Product

626

WS445 HD Wall Door Stop & Holder

- Cast material
- Heavy duty for high traffic areas
- Resilient, non-marring rubber tip
- Conforms to Fed. Spec. No. 1321
- Conforms to ANSI A156.16 L11341 for brass and L31341 for aluminum
- Packed with expansion shield and lead shield
- 2-1/4" x 3-5/8" (Dia. x Proj.)



Stocked Product

626

WS447 HD Wall Door Stop

- Cast material
- Designed for commercial applications
- Non-marring rubber tip
- Conforms to Fed. Spec. No. 1320
- Conforms to ANSI A156.16 L12011 for brass and L32011 for aluminum
- Packed with wood screw
- 2-1/4" x 3-5/8" (Dia. x Proj.)



Stocked Product

626

WS449 HD Wall Door Stop & Holder

- Cast material
- Heavy duty for high traffic areas
- Resilient, non-marring rubber tip
- Conforms to Fed. Spec. No. 1321
- Conforms to ANSI A156.16 L11341 for brass and L31341 for aluminum
- Packed with wood screw
- 2-1/4" x 3-5/8" (Dia. x Proj.)



Stocked Product


626



Ives – Roller Bumpers

RB470 Roller Bumper

- Cast material
- Designated to eliminate the possibility of interfering doors striking each other or of interlocking knobs
- For use where two right-hand or two left-hand doors interfere, meeting at odd angles in a corner
- Conforms to ANSI A156.16 L12212
- Packed with sheet metal screws
- (1-5/8" x 2-1/4") x 2-3/4" x 2-3/4" (base x A x B)

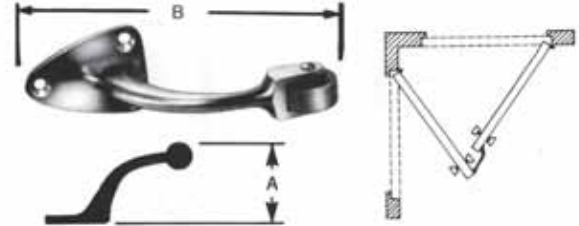

Stocked Product
626

RB471 4-1/2" Length Roller Bumper RB472 6" Length Roller Bumper

- Cast material
- Designated to eliminate the possibility of interfering doors striking each other or of interlocking knobs
- For use where doors in a corner are of opposite hand
- Nos. 471 and 472 conform to Fed. Spec. No. 1341
- No. 471 conforms to ANSI A156.16 L12192
- No. 472 conforms to ANSI A156.16 L12202
- Packed with sheet metal screws
- 471 2" dia. x 4-1/2" (base x Proj. A)
- 472 2" dia. x 6" (base x Proj. A)



Stocked Product
626

Ives

COR SERIES BAR COORDINATOR

- The COR series coordinators are designed for use on pairs of doors when one door needs to close before the other.
- All COR units function easily. The active door lever, located nearest to the active stop, holds the active door open until the trigger mechanism is released by the closing of the inactive leaf.
- All COR units are equipped with an override feature which allows the active door to close under extreme pressure.
- All COR units are compatible with flush bolts.
- The COR series does not cover the entire length of the stop, so a filler bar can be provided to maintain architecturally clean lines.
- Cor series coordinator channels and fillers are made of aluminum and are normally furnished US28 finish.
- Meets ANSI/BHMA A156.3, type 21A

Dimensions: 1-5/8" Wide x 5/8" Deep x Ordered Length

Stocked Product
COR52 x FL20 Filler Plate






Ives – Commercial

MB1 & MB2 MOUNTING BRACKETS

Product	Jamb Depth	Stop Width
MB1	4-3/4" Min.	Over 2-1/2"
MB2	4-3/4" Min.	Up to 2-1/2"

- Allows stop mounted hardware to be properly installed without damaging the coordinator.



MB1



MB2

Stocked Product
USP

LG1 LOCK GUARDS

- Units are non-handed and incorporate security frame pin to prevent separation of the door and frame.
- Unit covers the latch bolt area of the door and lock, thereby providing added protection from burglars, vandals or normal abuse.
- Ideal for use with mortise or cylindrical locks.
- Easy installation.
- Through bolted with carriage bolts and nuts.
- Finishes: Stainless steel - US32D, Steel - US2G

Stocked Product
US32D, US26



DOOR SILENCERS

SR64

- For use on metal frames featuring pneumatic design that, once installed, forms an air pocket to absorb shock and reduce noise of door closing.
- Tamper-proof once installed on the frame.
- Proper installation also eliminates door rattle and provides constant tension for door latches or locks.
- Packed in bags of 100.
- Each bag has an installation tool included.
- Meets ANSI/BHMA 156.16, L03011
- Finish: gray



SR65

- For use on wood frames, also features pneumatic design to cushion shock and absorb noise.
- To prevent removal, a small brad should be driven into stop strip and through stem of silencer, as shown in the detail.
- Packed in bags of 100.
- Each bag has an installation tool included.
- Meets ANSI/BHMA 156.16, L03021
- Finish: gray





Ives- Commercial Roller Latches

RL30

- Actuation is simple, closing of the door causes the roller to fall in the depression of the strike, thereby holding the door closed.
- The projection of the roller is easily adjusted using adjusting screws on the face of the unit.
- Maximum projection of the roller is 3/8" allowing for variance in the door clearance.
- Nylon Roller Standard.
- Forged Brass Construction.
- Meets ANSI/BHMA A156.16, E19091.
- Finishes: US3, US4, US10, US10B, US26, US26D.
- Optional Roller-F- Nylon covered brass roller.
- Optional Strike-A-ASA

Stocked Product

US3, 10B, US26, 32D



Dimensions:

Body: 1 1/2" Wide x 3-3/8" Long x 1-11/16" Deep

Strike: 1-11/16" Wide x 2-1/4" Long x 5/32" Thick


Optional ASA Strike: STK726 (not shown): 1-1/4" wide x 4-7/8" long x 3/32" thick

RL32

- Actuation is simple, closing of the door causes the roller to fall in the depression of the strike, thereby holding the door closed.
- The projection of the roller is easily adjusted by turning knurled knob on back of latch.
- Maximum projection of the roller is 1/2" allowing for variance in the door clearance.
- Fits heavy-duty cylindrical tock cutout.
- Nylon Roller Standard.
- Non-handed.
- Brass or Stainless Steel Construction.
- Meets ANSI/BHMA A156.16, E191 01.
- Finishes: US3, US4, US10, US10B, US32, US32D.
- Optional Roller-F- Nylon covered brass roller.
- Optional Strike-A-ASA.

Stocked Product

10B, 32D

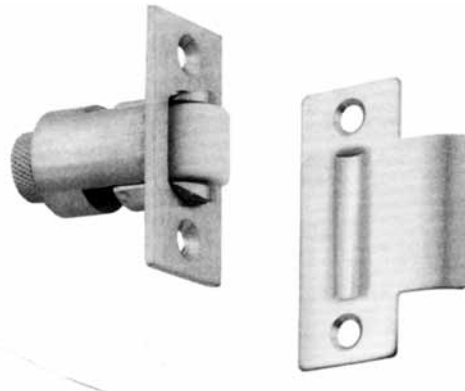

Dimensions:

Body: 1-1/8" Wide x 2-1/4" Long x 2-1/4" Deep

Strike: 1-1/8" Wide x 2-3/4" Long x 3/32" Thick

Optional ASA Strike: STK726 (not shown): 1-1/4" wide x 4-7/8" long x 3/32" thick




Ives – Vandal Resistant Trim

VR900 Vandal Resistant Trim

Features:

- Stainless Steel construction, 11 gage (0.120" thick).
- Thru-bolts and rugged mounting screws for maximum fastening strength.
- 1/4-20 screws and stainless steel finishing washers supplied with VR900 models; 10-24 screws supplied with VR910 models.
- Built-in lock protector prevents vandalism to mortise latchbolt (available on certain models).
- Extra-tough stainless steel cylinder collar prevents pipe wrench or similar tool from damaging cylinder. Tapered design prevents side impacts from transferring directly to cylinder. Collar spins freely.
- Sleek, attractive design.
- Furnished with mounting screws for door thicknesses of 1-3/4" to 2-1/4".
- Finish: US32D.
- Grip coated in black plastisol for softer touch and resilience to temperature extremes. Grip designed for comfortable operation.
- Meets ANSI/BHMA 156.13, Trim Security Test and California State Accessibility Standards Title 24.

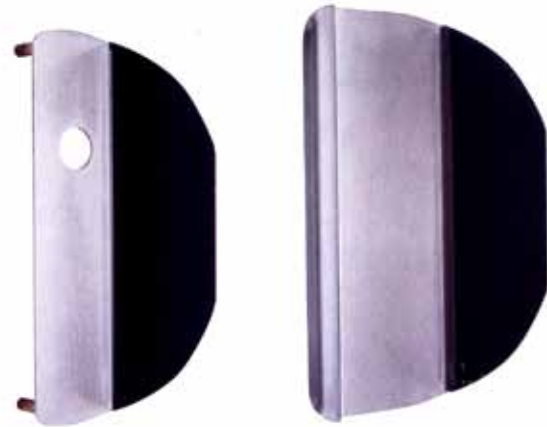

VR910-DT

- For use with Von Duprin 98/99 Series Rim and Vertical exit devices.
- Thru-bolts directly to device.
- Pull operation only. No cylinder cutout.

Width..... 5-1/4"
Height..... 11"
Thru-bolt pattern 1-3/8" W X 7" H
Clearance to Door ... 1-1/2"
Proj..... 1-7/8"



Stocked Product

32D

VR910-NI

- For use with Von Duprin 98/99 Series Rim and Vertical exit devices.
- Thru-bolts directly to device.
- Includes cylinder cutout.
- Tailpiece guide and cylinder cup provided.

Width..... 5-1/4"
Height..... 11"
Thru-bolt pattern 1-3/8" W X 7" H
Clearance to Door ... 1-1/2"
Proj..... 1-7/8"



Stocked Product

32D