


# THE KITCHEN STORE


WWW.STUDIOSUPPLIER.COM

A close-up photograph showing a wooden panel being attached to a metal rail using a silver-colored clip.


PANEL RAILS AND CLIPS • 4

A close-up photograph of a silver-colored metal molding with a small orange price tag attached. The tag has the word "Soda" and the price "\$1.75" written on it in black marker.

PRICE TAG MOLDING • 18

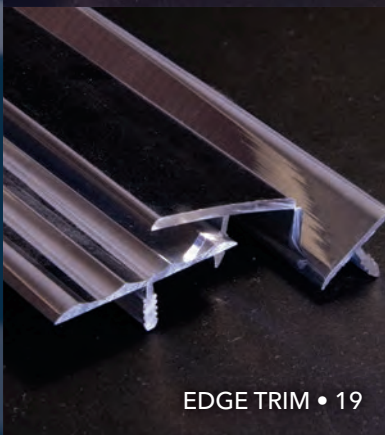A close-up photograph of a silver-colored metal edge trim piece, showing its L-shaped profile and a small notch.

EDGE TRIM • 19

A close-up photograph of a silver-colored metal divider bar, showing its T-shaped profile and how it fits into a slot in a wooden surface.

DIVIDER BAR • 22

A close-up photograph of a silver-colored metal angle piece, showing its L-shaped profile and how it fits into a corner.

ANGLES • 23

# 3 WAYS TO BUY



**CALL NOW**  
(310) 839-5215



**SEND A FAX**  
(310) 572-1015



**EMAIL**  
INFO@STUDIOSUPPLIER.COM

## GLOSSARY

**ALLOY** - This is the metal grade, in the case of our aluminum we offer three grades; 6061, 6063, and 6463:

- **6061** - Considered a structural alloy ideal for strength based applications or machining.
- **6063** - Considered an architectural alloy that is ideal for visual and aesthetic applications, and still provides a little over half the strength as 6061.
- **6463** - Considered a brite dip alloy, specially engineered for brite anodize finishes.

**TEMPER** - Represents the rigidity of the extrusion as it has been heat treated. Material rigidity can range from pliable (T1 - low heat treat that is naturally aged) to rigid (T5 - cooled from an elevated temperature and artificially aged).

### FINISHES -

- **MILL** - The natural/raw appearance of the aluminum as it is extruded. No secondary process, may show heavy production lines.
- **ANODIZE** - Electrochemical process that is corrosion resistant and protects the material from oxidizing.
- **POWDER COAT** - Electrostatically applied powder paint provides a .001-.003" 'skin' like surface over the metal that is both decorative and protective.
- **MECHANICAL POLISH** - Process that buffs out the surface finish to create a smooth, mirror-ish appearance. Does not protect the material from oxidizing.

# CONTENTS

- 4 PANEL RAILS AND CLIPS
- 6 T-SLOT FRAMING
- 7 T-TRACK
- 8 CASE SECTIONS
- 9 ROLLING DOOR TRACK
- 10 CABINET + CLOSET EXTRUSIONS
- 12 PULLS AND HANDLES
- 14 FILE HANGING RAIL
- 15 SNAP FRAMES
- 16 SLATWALL SYSTEMS
- 18 PRICE TAG MOLDING
- 19 EDGE TRIM
- 20 ROUNDED TRIM
- 20 CORNERS
- 21 J CAP EDGE TRIM
- 22 DIVIDER BARS
- 22 H CONNECTORS
- 22 H SECTIONS
- 23 ANGLES
- 24 CHANNELS
- 26 TEES
- 27 Z SECTIONS
- 27 HALF ROUNDS
- 28 HEXES
- 28 SOLID RODS
- 29 FLAT BARS
- 32 ROUND TUBES
- 32 SCHEDULE 40 PIPE
- 32 SQUARE TUBES
- 33 CONVERSION CHART

## CONTACT US

**P:** 310.839.5215

**F:** 310.572.1015

**E:** [info@studiosupplier.com](mailto:info@studiosupplier.com)



**HUNDREDS OF  
ALUMINUM PRODUCTS  
READY TO SHIP SAME DAY.**



**CUSTOM LENGTHS AVAILABLE**



**LARGE VOLUME  
QUANTITIES AND  
PRICING AVAILABLE**



**100% FRESHLY  
SQUEEZED ALUMINUM,  
MADE IN THE U.S.A.**



**ALL OF THESE  
ALUMINUM PRODUCTS  
ARE 100% RECYCLABLE**

# PANEL RAILS AND CLIPS



## PRODUCT INFO

Panel Rails and Clips are a fast, easy and cost effective method to lock in place any kind of wall panel, acoustic panel, partition, cabinet, signage, artwork, etc. The "Z" shaped clips wedge together locking panels in place. It provides for easy and fast future removal or dismounting for change or replacement. Since Panel Rails and Clips remain concealed, it also allows for prefinishing, without time consuming face nailing or costly on-the-job finishing. Installation time and costs can be cut by 50% when using Panel Rails and Clips.

**ALLOY** 6063 Ultra-Corrosive Resistant  
Architectural Grade Alloy, T5 Temper

**FINISH** Mill Finish, Unpolished Per American  
Society for Testing and Materials (ASTM)

**CUT LENGTH** Available in 3/8", 7/16", 5/8" or 45/64" lift off and in  
lengths from 1-1/2" to 12' with or without holes

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)

**FAB** Punched 8" on center to accommodate #8 screws


Z Clip Model




## 5337 Z CLIP STYLE 1

Lift-off clearance of 5/8" required for installation and removal.  
Overall height when mounted is 3-1/8"

Offset	Drop	Length	SKU	Each
3/16" (.175")	5/8" (.625")	1-1/2" Clip	<b>5337</b>	S
3/16" (.175")	5/8" (.625")	6' Rail	<b>5337</b>	S
3/16" (.175")	5/8" (.625")	12' Rail	<b>5337</b>	S

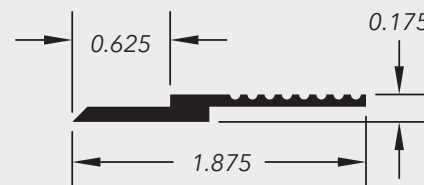





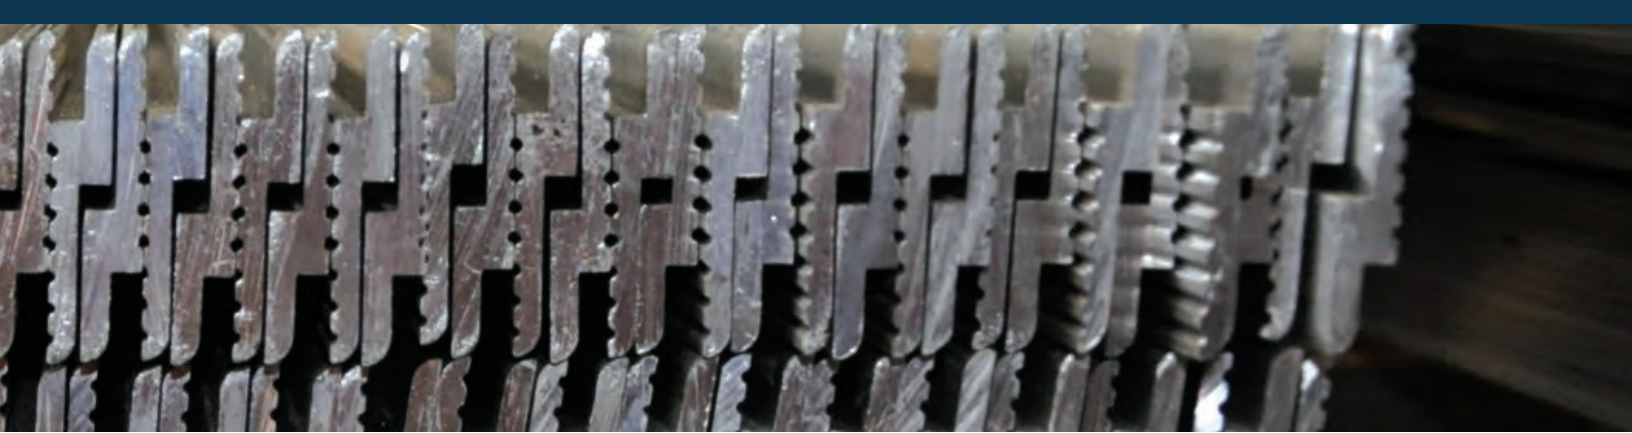

### 5403 Z CLIP STYLE 2

Lift-off clearance of 3/8" required for installation and removal. Overall height when mounted is 2-3/8" (Style 1 has less offset and larger lift-off than Style 2 with larger offset and small lift-off).



Offset	Drop	Length	SKU	Each
1/4" (.250")	3/8" (.375")	2" Clip	<b>5403</b>	S
1/4" (.250")	3/8" (.375")	6' Rail	<b>5403</b>	S
1/4" (.250")	3/8" (.375")	12' Rail	<b>5403</b>	S

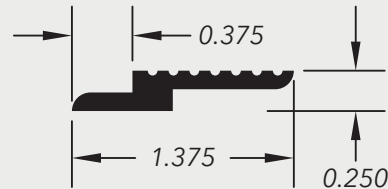

### 9548 Z HANGER - LIGHT DUTY CLIP

Lift-off clearance of 45/64" (.704") is required for installation and removal. Overall height when mounted is 1-3/4". Punched 1" on center to accommodate #8 screws


Offset	Drop	Length	SKU	Each
7/32" (.225")	45/64" (.704")	6' Rail	<b>9548</b>	S
7/32" (.225")	45/64" (.704")	12' Rail	<b>9548</b>	S



### 8142 HD STYLE 3 CLIP

Medium to heavy duty application: ideal for hanging wall panels, partitions and signs. Lift-off clearance of 7/16" required for installation and removal. Overall height when mounted is 3-1/16" and offset from wall is 1/4".



Offset	Drop	Length	SKU	Each
1/4" (.250")	7/16" (.438")	2-1/2" Clip	<b>8142</b>	S
1/4" (.250")	7/16" (.438")	6' Rail	<b>8142</b>	S
3/4" (.750")	7/16" (.438")	12' Rail	<b>8142</b>	S

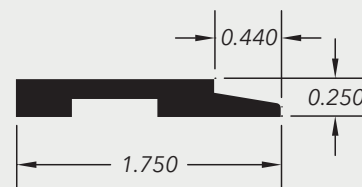

### 7919 XL STYLE 4 CLIP

Overkill? Perhaps, but what project doesn't need a little overkill? The biggest, baddest clip to ever leave our R&D Department, the XL Style 4 Clip was designed to wedge two buildings together in order to create the most secure lock imaginable. Comes unpunched. Lift-off clearance of 3/4" required for installation and removal. Overall height when mounted is 4.00" And offset from wall is 3/8". Remember, though, with great power comes great responsibility.

Offset	Drop	Length	SKU	Each
3/8" (.375")	3/4" (.750")	2-1/2"	<b>7919</b>	S
3/8" (.375")	3/4" (.750")	6' Rail	<b>7919</b>	S
3/8" (.375")	3/4" (.750")	12' Rail	<b>7919</b>	S

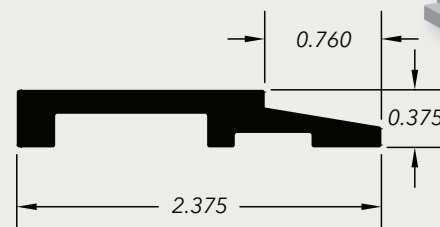

# T SLOT FRAMING: QUAD TRACKS

## PRODUCT INFO




Heavy Duty Modular T Slot Framing Extrusions are used for the custom construction of structures and products ranging from furniture to clean rooms. Our offering of the two most popular sizes of 25 mm (1") and 40 mm (1-1/2") Extrusions are used with a variety of stock hardware parts to easily assemble into whatever formation your mind can conceive. Manufactured in the USA of high quality aircraft grade structural 6061 alloy, we are confident that these extrusions will hold up to whatever design your mind can throw at them.

- 25MM (.984") - works with the Slot 6 T Slot Hardware
- 40MM (1.575") - works with the Slot 8 T Slot Hardware

- ALLOY** 6061 Multi-Purpose Structural Grade Aluminum, T6 Temper\*
- FINISH** Clear Anodized Finish, Per MIL-A-8625F, Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)
- CUT LENGTH** 8 Foot Cut Length;  
Custom lengths and finish available.
- TOLERANCE** Standard System of Measurement Inch Material\*
- MET** American Society for Testing and Materials (ASTM)

## QUAD TRACKS

Size	SKU	1' Mill	1' Clear	4' Mill	4' Clear	8' Mill	8' Clear
25mm (0.984")	OA9401	S	S	S	S	S	S
40mm (1.575")	OA9402	S	S	S	S	S	S

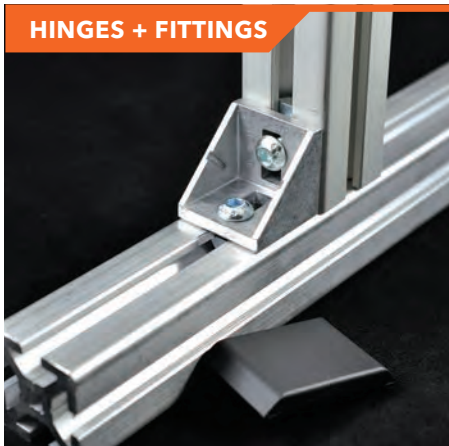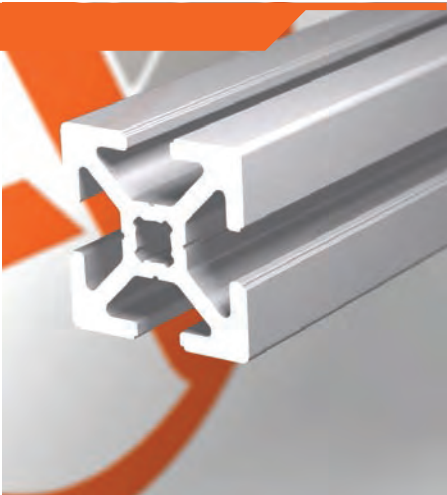

T SLOT HARDWARE AVAILABLE (T NUTS, FASTENERS, HINGES, HANDLES, ETC.)  
PLEASE CALL OR EMAIL WITH REQUIREMENTS, WE CAN SUGGEST THE COMPONENTS!

# T-TRACK

## PRODUCT INFO

Specialty "T" Track allows you to slide in 1/4"-20 hex head bolts to mount, position, and hang clamps and fixtures. To reposition clamps and fixtures, loosen the bolt and slide to new position. Ideal for positioning jigs, stops, and hold-downs on table saws. Multiple lengths available.

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**FINISH** Clear Anodized Finish, Per MIL-A-8625F



**CUT LENGTH** Available in 18", 24", 36", and 48"

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)

**FAB** Punched and Countersunk Holes 3" on Center to Accommodate #8 Pan Head Screws

Width (W)	Height (H)	SKU	Length (H)	Each
47/64" (.730")	1/2" (.490")	7150	18"	S
47/64" (.730")	1/2" (.490")	7150	24"	S
47/64" (.730")	1/2" (.490")	7150	36"	S
47/64" (.730")	1/2" (.490")	7150	48"	S

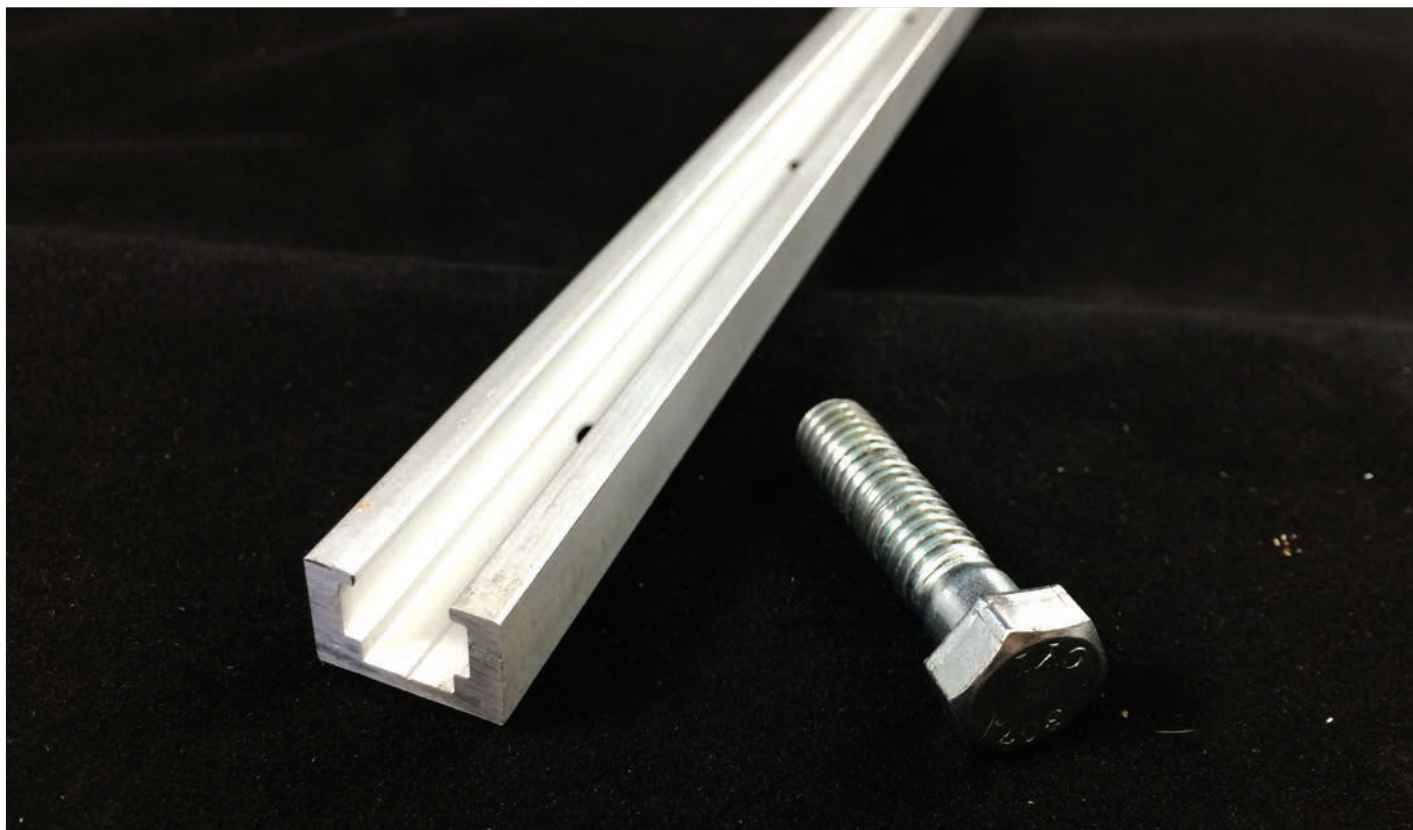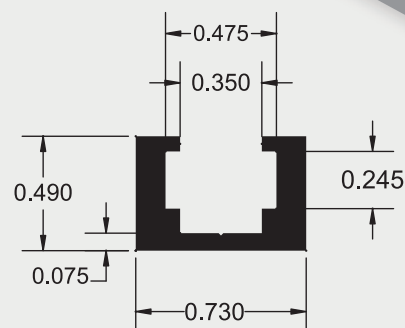




# CASE SECTIONS

## PRODUCT INFO

<b>ALLOY</b>	6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper
<b>CUT LENGTH</b>	6 Foot Cut Length <i>Longer Stocked Length Available</i>
<b>TOLERANCE</b>	Standard System of Measurement Inch Material*
<b>MET</b>	American Society for Testing and Materials (ASTM)

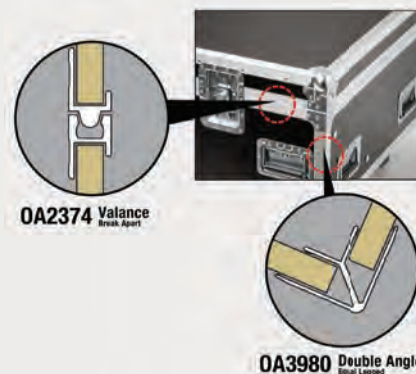

## BREAK APART VALANCES

Tongue and Groove Extrusion is perfect for the lid enclosures for all your Road or Flight Cases. The design allows material to be extruded as one piece, then Breaks Apart into two separate extrusions, male and female.


Fits (W)	Channel Width x Exposed Surface	SKU	Each
1/4" (.250")	9/16" (.550") x 2" (2.00")	<b>3316</b>	S
3/8" (.375")	7/16" (.435") x 1-3/4" (1.750")	<b>2374</b>	S
1/2" (.500")	9/16" (.550") x 2" (2.00")	<b>4429</b>	S



## DOUBLE ANGLE EDGE

The Double Angle Enclosure Extrusion is the easiest way to join your 90 degree corners for all your Road or Flight Cases. The design allows you to easily join all your material at those 90 degree corners, while also providing easier assembly and protecting your cases... adding longer product life in addition to higher quality.


Fits (W)	SKU	Each
1/4" (.281")	<b>3860</b>	S
3/8" (.405")	<b>3980</b>	S
1/2" (.562")	<b>3931</b>	S



## PUNCHED SINGLE ANGLE


Legs are Punched 3" OC with 3/16" holes (only Single Angle Edge)

Legs	SKU	Each
1-3/8" (1.375")	<b>8460</b>	S





# ROLLING DOOR TRACK

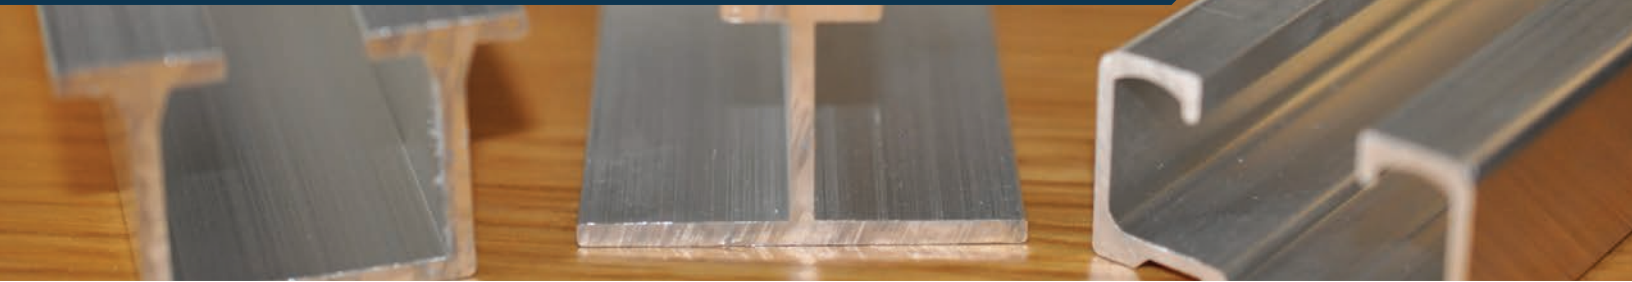

## PRODUCT INFO

Sliding door tracks are great for residential or commercial interiors. These modern sliding door tracks offer a series of sophisticated design solutions for dividing space-as room dividers, closet doors, sliding doors or pocket doors. The minimalist top hung design eliminates obtrusive floor tracks and creates a simple, minimalist design that meets the specifications of architects, decorators and engineers around the world.

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**FINISH** Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)


**CUT LENGTH** 8 Foot Cut Length; Custom lengths and finish available.

**TOLERANCE** Standard System of Measurement Inch Material\*


**MET** American Society for Testing and Materials (ASTM)

Width (W)	Height (H)	SKU	Each
1-13/23" (1.565")	3/4" (.770")	<b>9028</b>	S (12' CA)
1-1/27" (1.037")	25/32" (.781")	<b>9029</b>	S
1-23/59" (1.390")	4/5" (.798")	<b>9143</b>	S


### 9028 - SINGLE



### 9029 - DUAL



### 9143 - CLOSED



## TRACK HARDWARE

### 9028-A - APRON

- Works with 9028 & 9029
- Allows for side mounting




### 9028-TP - TOP PLATE

- Works with 9028 & 9029
- Allows for top mounting



### 9028-NC - NYLON CARRIER

- Works with 9028 & 9029
- Nylon Wheels



### 9028-BBC - BALL BEARING CARRIER

- Works with 9028 & 9029
- Steel, precision ball bearing wheels
- For Heavy Door applications



### 9143CT - BALL BEARING CARRIER W/ TOP PLATE

- Works with 9143
- Comes with quick release top plate & necessary screws



CHECK THE WEBSITE FOR MORE DETAILS INCLUDING WEIGHT CAPACITY FOR THE HARDWARE

# CABINET & CLOSET EXTRUSIONS



## GARAGE CABINET TRIM PRODUCT INFO

Use our premium aluminum clear anodized handles to finish off your cabinets. The combination of the shelf stiffener and the continuous pull adds both function and style to any color cabinets. These sections are specially engineered to pressure fit onto melamine boards. The shelf stiffener will snap any shelf straight and maintain shelves' rigidity over time from excessive poundage and use. The continuous pull is cheaper than some regular steel handles on the market and provides a far more sleek and attractive means to open cabinets, while contributing to a flush sleek cabinet installation.

With a premium look and the multiple advantages of using aluminum, there is no better way to customize your cabinets today.

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**FINISH** Clear Anodized Finish, Per MIL-A-8625F


**CUT LENGTH** 8 Foot Cut Length

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)

### CONTINUOUS PULL


- For push fit on material with thickness of 3/4" and 1". Ideal for both vertical and horizontal applications, to run entire length of door or drawer.
- Popularly used in combination with 5479 Pressure Fit Shelf Stiffener.

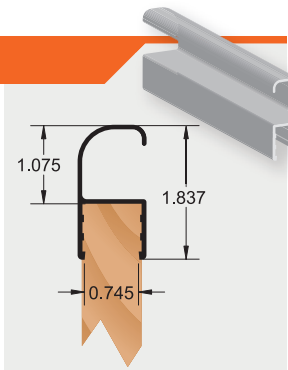

Fits	SKU	Finish	Each
3/4"	<b>6920</b>	Clear Anodized	S
3/4"	<b>6920</b>	Black Powder Coat	S
3/4"	<b>6920</b>	White Powder Coat	S

### SHELF STIFFENER

- For push fit on material with thicknesses of 3/4" and 1".
- Ideal for correcting and preventing sagging shelves in garage cabinets, pantries, and closets.
- Popularly used in combination with 6920 Pressure Fit Continuous Pull.

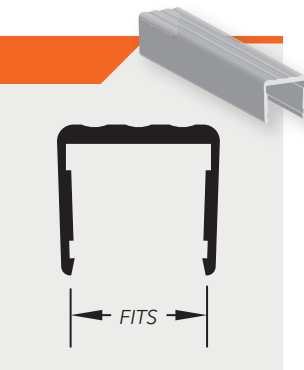

Fits	SKU	Finish	Each
3/4"	<b>5479</b>	Clear Anodized	S
3/4"	<b>5479</b>	Black Powder Coat	S
3/4"	<b>5479</b>	White Powder Coat	S
1"	<b>7696</b>	Clear Anodized	S





## CLOSET RODS PRODUCT INFO

Dress up your closets with our Premium Closet Rods. Our system has a generous wall thickness that provides top-rated load bearing. Our closet rods not only look great, but boast the quality of American made products.

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**FINISH** Clear Anodized Finish, Per MIL-A-8625F


**CUT LENGTH** 6 Foot Cut Length

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)

### ROUND CLOSET ROD


1-5/16" OD x 5/64" Wall (1.316" OD x .079")

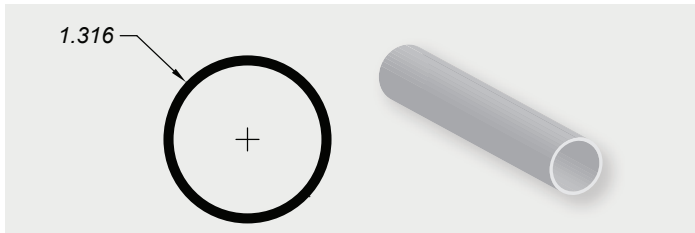

Finish	SKU	Each
Satin Clear	<b>7749</b>	S
Gold	<b>7749</b>	S
Oil Rubbed Bronze	<b>7749</b>	S

### OVAL CLOSET ROD

1-3/16" Tall x 19/32 Wide x 1/16" Wall (1.188" x .600" x .060")

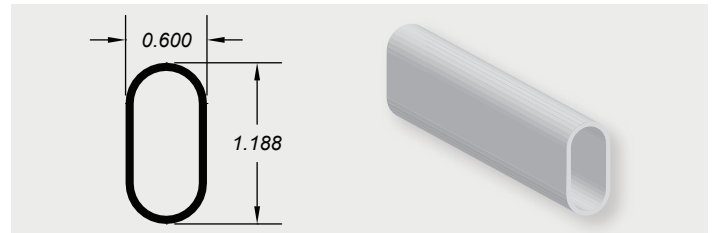

Finish	SKU	Each
Satin Clear	<b>8443</b>	S
Gold	<b>8443</b>	S
Oil Rubbed Bronze	<b>8443</b>	S





# PULLS AND HANDLES

## PRODUCT INFO

From traditional to contemporary—kitchens to offices—our pulls and handles add functional and stylish detail to your architectural project. Let us help you achieve a truly customized look that will set your project apart.

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**FINISH** Clear Anodized Finish, Per MIL-A-8625F


**CUT LENGTH** 6 Foot Cut Length

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)

### DRAWER PULL


- Designed to mount atop material and fastened with screws through the back flange that overlaps material.
- Flush Mortise Mounting (Similar to Epco Hardwares DP412)
- Available in 3/4" (.750") and 13/16" (.812") Widths; 1-1/4" Tall (1.248")

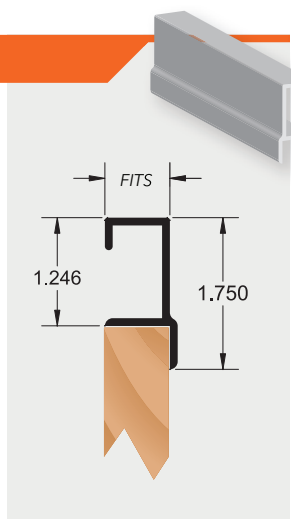

Fits	SKU	Each
3/4" (.750")	<b>5047</b>	S
13/16" (.812")	<b>5048</b>	S

### PANEL DRAWER PULL


- For use with material thicknesses of 3/4" and 13/16" with special internal angular detail.
- Designed to mount atop material and fastened with screws through the back flange that overlaps material.
- Flush Mortise Mounting (Similar to Epco Hardwares DP46)
- Available in 3/4" (.750") and 13/16" (.812") Widths; 1-1/4" Tall (1.250")

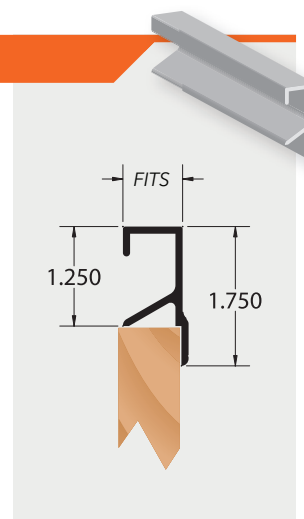

Fits	SKU	Each
3/4" (.750")	<b>5049</b>	S
13/16" (.812")	<b>5089</b>	S

### KERF MOUNTED PULL


- For Use with material thickness of 3/4".
- Designed to Mount Atop Material via a 1/8" Routed Saw Kerf
- Similar to Epco Hardwares DP419
- Available in 3/4" (.750") Width; 1-3/8" Tall (1.375")

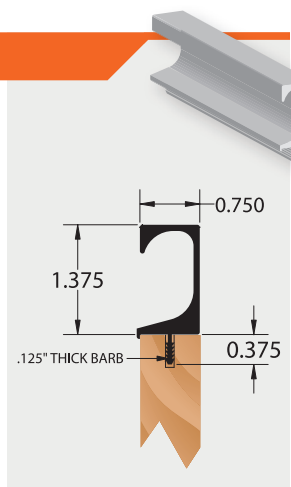


Fits	SKU	Each
3/4" (.750") Wide	<b>5122</b>	S

### CONTINUOUS PULL

- For push fit on material with thickness of 3/4". Ideal for both vertical and horizontal applications, to run entire length of door or drawer.
- Popularly used in combination with 5479 Pressure Fit Shelf Stiffener.
- Available in 3/4" (.750") Width; 1-27/32" Tall (1.837")
- 8' Length

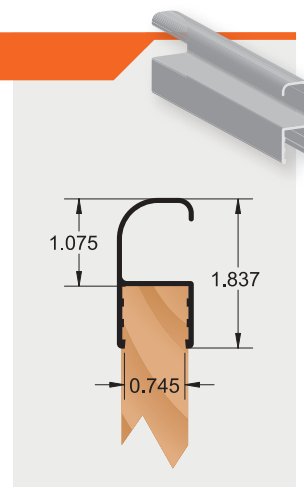


Fits	SKU	Each
3/4" (.745")	<b>6920</b>	S

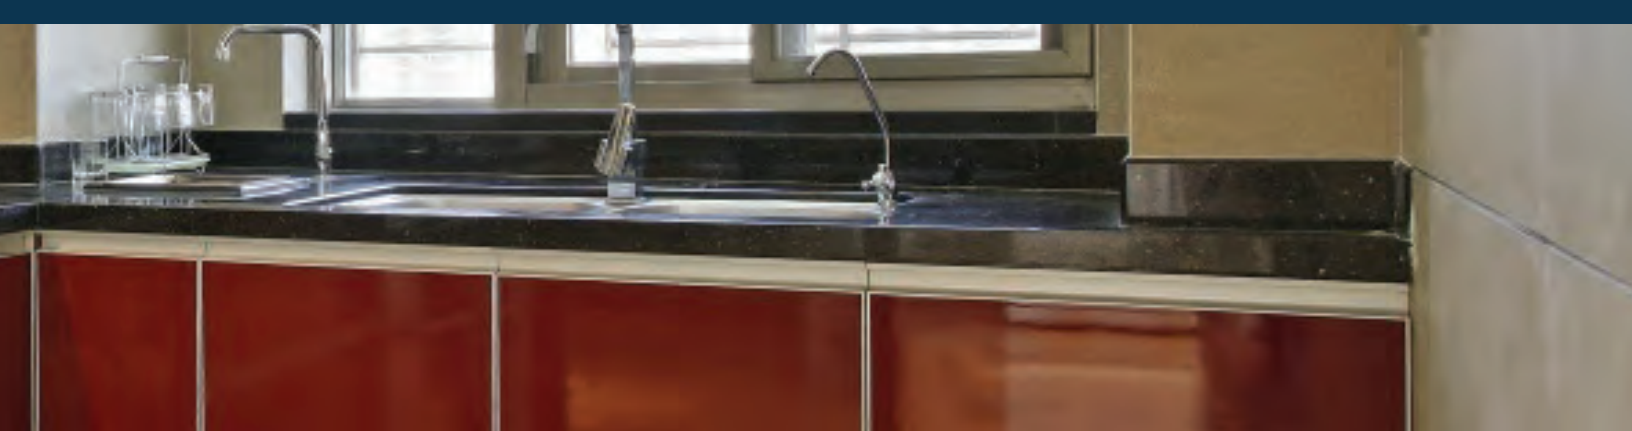

### TOP HANDLE


- Designed to Mount Atop Material via a 1/8" Routed Saw Kerf
- Available in 3/4" (.750") and 5/8" (.625") wide with 1-3/8" height, (1.375")

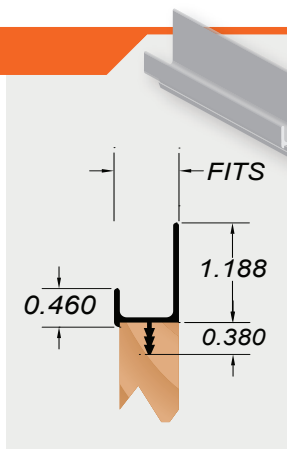

Fits	SKU	Each
5/8" (.625")	<b>7935</b>	S
3/4" (.750")	<b>5085</b>	S

### ANGLE BULB PULL


- For use with material thickness of 1/2" - 7/8".
- Designed for back mounting to material with screws (not included).
- Available in 1-1/2" Clips in Bags of 10 with Holes Predrilled on Back for #6 Screws.
- Similar to Epco Hardwares DP41
- Available in 3/4" (.750") wide and 1-3/8" Tall (1.375")

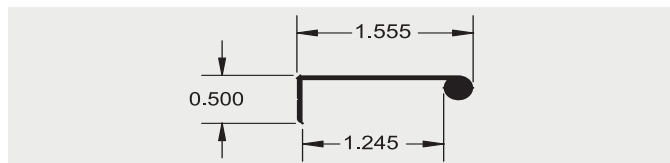

Lip Size	SKU	Each
1-9/16" (1.555")	<b>5088</b>	S
1-9/16" (1.555")	<b>5088</b>	S

### FLUSH MORTISE PULL


- For use with material thickness of 13/16".
- Designed to mount atop material and fastened with screws through the back flange that overlaps material.
- Flush Mortise mounting (Similar to Epco Hardwares DP414)
- Available in 7/8" (.875") Wide and 1-3/4" (1.750") Tall.

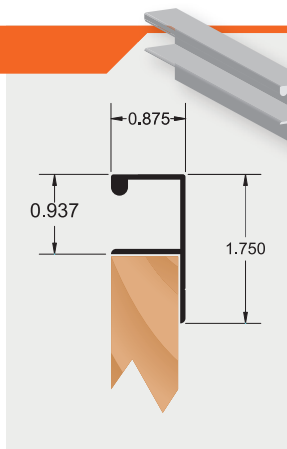

Fits	SKU	Each
7/8" (.875")	<b>5090</b>	S

### BULB PULL

- For use with material thickness of 5/8" - 1-1/4".
- Designed for top mounting to material with screws (not included)
- Similar to Epco Hardwares DP42.

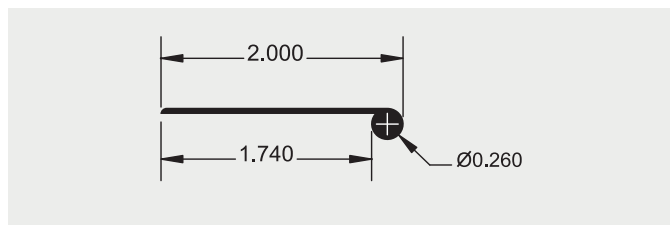


Lip Size	SKU	Each
2" (2.00")	<b>5087</b>	S

### SAN ANDREAS PULL

- For use with material thickness of 3/4" but can be used for other thickness if accounted for in milling process.
- Designed for Kerf Mounting to material edging, 1/8" Kerf.
- 2" Lip with 3/8" (.375") Barb Depth).

Dimensions	SKU	Each
2" (2.00") Lip 3/8" (.375") Barb Depth	<b>5138</b>	S

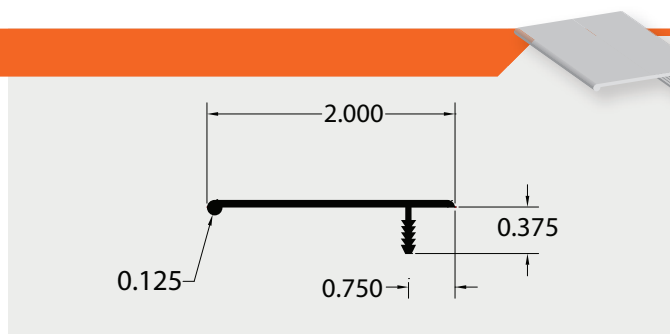

# FILE HANGING RAIL



## PRODUCT INFO

Files need filing, and we have the hanging file folder molding that you have been looking for. American Made and well priced makes our Desk File Rails the best value in the market.

- ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper
- FINISH** Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)  
Also available in Black Anodized Finish, Per MIL-A-8625F
- CUT LENGTH** 8 Foot Cut Length
- TOLERANCE** Standard System of Measurement Inch Material\*
- MET** American Society for Testing and Materials (ASTM)

## 1/8" (.125") THICK

Width	SKU	Each
1/2" (.500")	1058	S
1/2" (.500")	1058	S (12' CA)
3/4" (.750")	2126	S
3/4" (.750")	2126	S (12' CA)


\* 6ft cut



## PRESS FIT FILE RAIL

- Press Fit File Hanging Rail sits atop 1/2" material, leaving a generous 5/16" (.325") lip for the files to slide along
- 7/8" Total Height x 1/2" Wide x 3/64" Wall (.875" x .550" x .040")

Width	SKU	Each
1/2" (.500")	5593	S

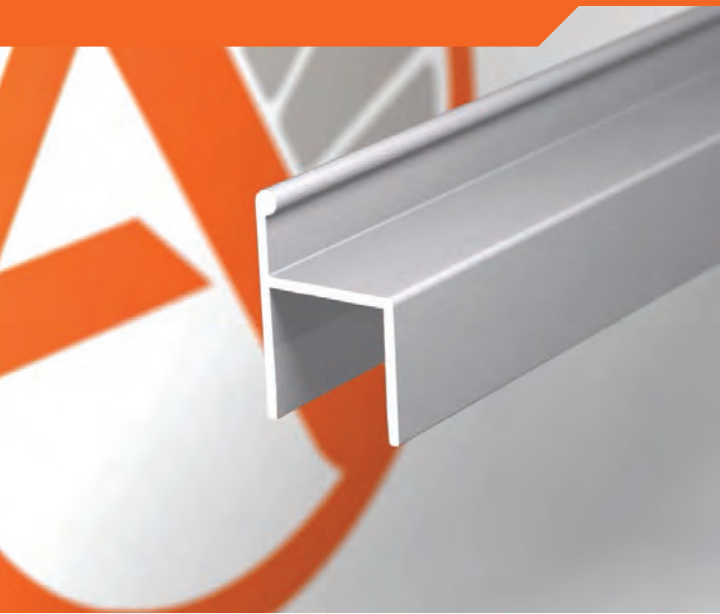



# SNAP FRAMES

## PRODUCT INFO

Specialty designed for the elite, American made, and Style with Function. We have designed one of the most popular rounded style snap frame extrusions on the market, easy on the eye and on your pocket book. They are sold in Lengths and include Corner Brackets and your required Spring Steel! We are sure that our Extruded Snap Frame Extrusions will add the style and function to the advertisements your client is looking for.

**ALLOY** 6063 Ultra-Corrosive Resistant  
Architectural Grade Alloy, T5 Temper

**FINISH** Clear Anodized Finish, Per MIL-A-8625F

**CUT LENGTH** 8 Foot Cut Length.

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)




## COVER

Clear Anodized Aluminum Snap Frame Cover Cap, engineered to easily hinge atop our Base Extrusion with precise accuracy. Sold in long lengths to allow you to meet the variety of printed advertisements your project may require.

4 Corner brackets and 4 Spring Steels Included with every 8 foot pairing lengths

Type	SKU	Each
Cap Cover	<b>9069</b>	S

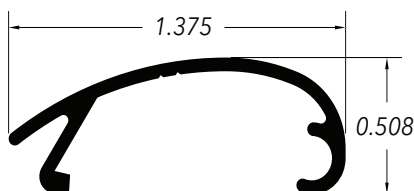


## BASE

Clear Anodized Aluminum Snap Frame Base Plate, designed to easily work perfectly with our Cap profile, while engineered with the bottom mount T Track to allow for easier assembly and accommodation for our flush hanger. The 9410 Hanger Extrusion quickly mounts to the wall while providing a functional tongue that serves as the hanging rail for the base to slide easily into. Sold in long lengths to allow you to meet the variety of printed advertisements your project may require.

4 Corner brackets and 4 Spring Steels Included with every 8 foot pairing lengths

Type	SKU	Each
Base	<b>9055</b>	S

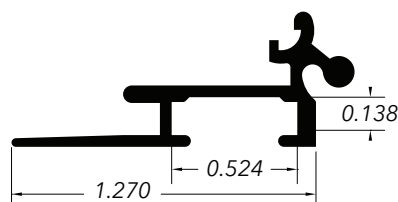

# SLATWALL SYSTEMS



## SLATWALL SYSTEM PRODUCT INFO

Aluminum Slatwall Insert for use of slatwall panels to add support, style and protection from blow out. Insert is a standard for most slatwall, but please check the drawing to confirm fit with your panels before ordering.

Also available: our bits for use in routing your panels out for the slots for slatwall panels. These bits were specially designed for our extrusions, and meet all the industry standards for height and depth for use with retail slatwall hanging hardware.

**FINISH** Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)



**CUT LENGTH** 8 Foot Cut Length

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)

## SLATWALL INSERT

Material Size	SKU	Each
<b>SLATWALL INSERT</b>		
1-9/32" W x 33/64" H x 1/32" Wall	<b>5022</b>	S
<b>T SLOT CUTTER ROUTER BIT</b>		
	<b>5022-RTRBIT</b>	S

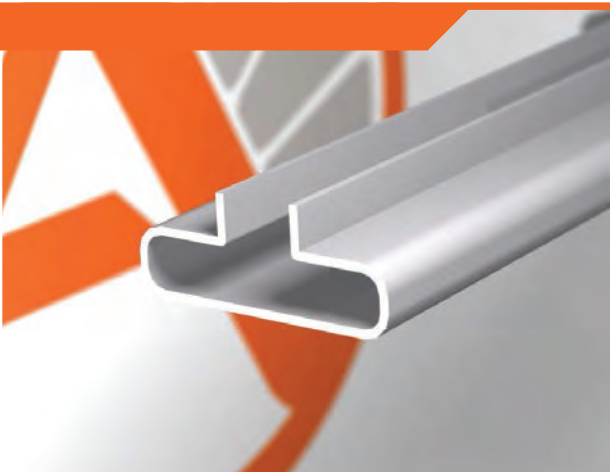
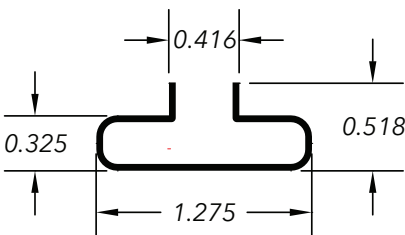


## INTERLOCKING SLATWALL PANEL

Interlocking Aluminum Slatwall Panel, Stack it as high as you want! These self mating aluminum slatwall strips are perfect for your cubicle millwork projects or retail spaces alike... The material comes mill finish... ready for you to paint or keep mill. Section allows your functional slatwall spacing to be fixed at exactly 1.610" (1-5/8".)

- Available in 5 and 10 foot Lengths
- 1-5/8" (1.610") On Center Slats
- Mill Finish, Ready for Paint
- 6063-T5 Aluminum

Width	Slatwall Spacing	SKU	Each
5.235"	1.610"	<b>8524</b>	S

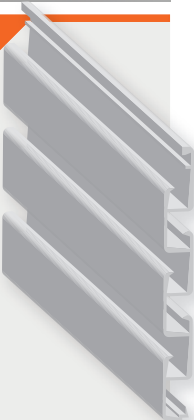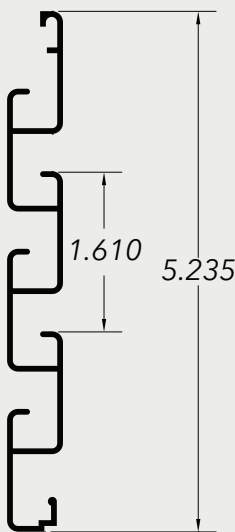

## EZ SLATWALL SYSTEM PRODUCT INFO

Customization options are simple, affordable and unparalleled by any other product.

- Slots can be used with both peg board hooks and standard slatwall hardware.
- System can be packaged in small convenient box for ease in handling and shipping.
- Installs in Minutes!
- Patent Pending
- Panel Options Online

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**FINISH** Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)

**CUT LENGTH** 4 Foot Cut Length

**TOLERANCE** Standard System of Measurement Inch Material\*


**MET** American Society for Testing and Materials (ASTM)



**INSTALL AS EASY AS 1, 2, 3...**

### EZ SLATWALL TRACK


EZ Slatwall Systems : Aluminum Stackable Track to be Used as the Main Joining Extrusion to Build the Height and Add the T Slot Functionality. EZ Slatwall System Track is Used in Between the 1/8" Material to Desired Height. This Piece is the Section in which the Wall Panel System's Height is Grown and Determined. Designed to be Fastened with Screws to the Wall, Stacked Atop a Panel with Top Tab Fastened to a Wall and Repeated Until your Desired Height is reached. This Section is to be Used in Conjunction with the EZ Slatwall System Trim 7587 and 1/8" Thick Panels (125P, Not included).



Width (W)	Height	Reveal	SKU	Each
1/8" (.140")	1-57/64" (1.898")	23/64" (.358")	<b>7389</b>	S

### EZ SLATWALL TRIM - TOP/BOTTOM


EZ Slatwall Systems : Aluminum Trim to be Used as Both the Top and Bottom Trim for the EZ Slatwall System, Designed to be Used with any 1/8" Material. This Piece is the Section in which the Wall Panel System Starts and Terminates. Designed to be Fastened with Screws to the Wall in Bottom Trim Application, Top Trim Application can Either be Left Atop the Rigid 1/8" Panel you Insert or Adhered to the Wall with any Type of Industrial Adhesive. This Section is to be Used in Conjunction with the EZ Slatwall System Track 7389 and 1/8" Thick Panels (125P, Not included).



Width (W)	Height (H)	Reveal	SKU	Each
1/8" (.140")	1" (1.012")	23/64" (.358")	<b>7587</b>	S

### EZ SLATWALL FINISHING ANGLE

Our solution for exact finishing off of the edges of your EZ slatwall panel project, the perfect trim at the perfect size to make your finished product look perfect.



Width (W)	Height (H)	Wall	SKU	Each
37/64" (.585")	37/64" (.585")	3/64" (.040")	<b>7589</b>	S



# PRICE TAG MOLDINGS

## PRODUCT INFO

Add function and style with our mechanically polished aluminum architectural price tag molding. For use with material thicknesses of 3/4", 1-1/8", 1-1/4", 1-15/32" and 3-3/5". Designed to mount as edge trim on the front of shelves and fastened with screws through the face of the profile.

**ALLOY** 6063 Ultra-Corrosive Resistant  
Architectural Grade Alloy, T5 Temper

**FINISH** Mechanical Polished Finish

**CUT LENGTH** 6 Foot Cut Length

**TOLERANCE** Standard System of Measurement Inch Material\*



**MET** American Society for Testing and Materials (ASTM)

## FLUTED PRICE TAG MOLDING

**FAB** Punched holes 6" on Center to Accommodate #5 Screws.


- For Use with material thickness of 3/4".
- Designed to Mount Atop Material via a 1/8" Rounded
- Available in 3/4" (0.750") Width; 1-3/8" Tall (1.375")

Material Size (A)	Ticket Size (B)	SKU	Each
3/4" (.750")	5/8" (.622")	<b>7900</b>	S
1-1/8" (1.124")	7/8" (.910")	<b>7899</b>	S
1-1/2" (1.479")	1-7/64" (1.111")	<b>6387</b>	S

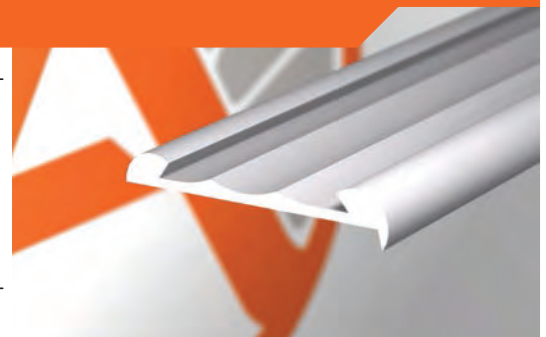

## CONCAVE PRICE TAG MOLDING

Material Size (A)	Ticket Size (B)	SKU	Each
1-1/4" (1.284)	1-9/64" (1.148")	<b>7898</b>	S




## UNIVERSAL PRICE TAG MOLDING


This versatile price tag molding not only adds function and style to your display but allows you to work with any size tag for your product info.

- For Use with material thickness of 3/4".
- Designed to Mount Atop Material via a 1/8" Rounded
- Available in 3/4" (0.750") Width; 1-3/8" Tall (1.375")

Material Size	Ticket Size	SKU	Each
3-3/5" (3.610")	Universal	<b>7897</b>	S



# EDGE TRIM

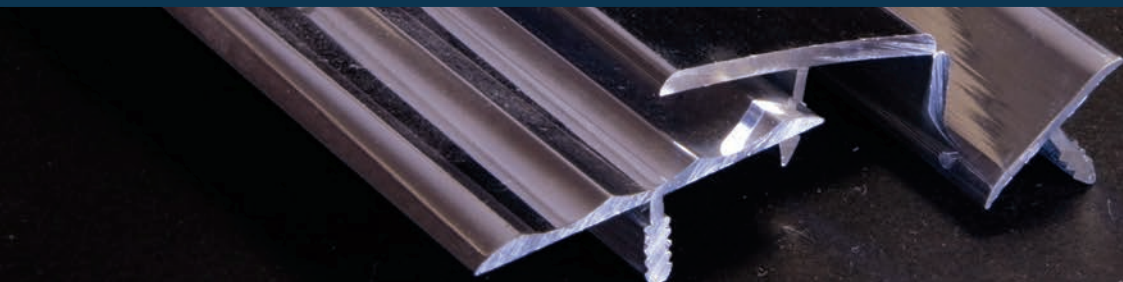

## PRODUCT INFO

The difference between a run-of-the-mill countertop, table or display and one that captures attention is often in the details. Whether you are looking to create a traditional 50's look or something with contemporary flare, our edge trims add customized style while providing protection.

**ALLOY** 6063 Ultra-Corrosive Resistant (CA or Polish)  
Architectural Grade Alloy, T5 Temper  
6463 Chemically Enhanced  
Architectural Grade Alloy, T5 Temper (BD)

**FINISH** Mechanical Polished Finish,  
A2, Finish, Per MIL-A-8625F


**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)

**FAB** Punched and Countersunk Holes 6" on Center


### PUSH IN EDGE TRIM: SMOOTH\*

Width (W)	Depth (H)	Thick (T)	SKU	3'	6'	Finish/Fab
3/4" (.750")	3/8" (.375")	1/10" (.100")	<b>6028</b>	S	S	Polish/-
1-1/4" (1.250")	2/5" (.390")	1/10" (.100")	<b>5688</b>	S	S	Polish/-



### PUSH IN EDGE TRIM: FLUTED\*

Width (W)	Depth (H)	Thick (T)	SKU	3'	6'	12'	Finish/Fab
1-1/4" (1.250")	7/16" (.438")	1/8" (.125")	<b>5532</b>	S	S	-	Polish/-
1-1/2" (1.500")	3/8" (.375")	1/8" (.125")	<b>5239</b>	S	S	S	Polish/-



\*Designed to Mount to Material via a 1/10" Routed Saw Kerf


### HEAVY LIP EDGE TRIM

Fits (A)	Lip (B)	SKU	3'	6'	12'	Finish/Fab
7/8" (.833")	1/2" (.479")	<b>7433</b>	S	S	S (Polish)	BD/Holes
1-1/2" (1.500")	1/2" (.479")	<b>7434</b>	S	S	-	BD/Holes



### EDGE TRIM

Covers (A)	Lip (B)	SKU	3'	6'	12'	Finish/Fab
1/2" (.500")	1/4" (.250")	<b>7429</b>	S	S	S (CA)	BD/Holes
3/4" (.750")	1/4" (.240")	<b>7428</b>	S	S	S (CA)	BD/Holes
7/8" (.883")	1/4" (.254")	<b>7432</b>	S	S	S (CA)	BD/Holes
1" (1.062")	1/4" (.250")	<b>7430</b>	S	S	-	BD/Holes
1-1/4" (1.250")	1/4" (.250")	<b>7431</b>	S	S	S (CA)	BD/Holes
1-5/8" (1.625")	1/4" (0.240")	<b>9538</b>	-	-	S	Polish/Holes




### GROOVED EDGE TRIM

Fits (A)	Lip (B)	SKU	3'	6'	12'	Finish/Fab
2" (2.012")	3/16" (.188")	<b>7435</b>	S	S	S (Polish/CA)	BD/Holes



### FINISHING ANGLE: 1/16" WALL

Leg (A)	Leg (B)	SKU	3'	6'	12'	Finish/Fab
1/2" (.500")	1" (1.00")	<b>7413</b>	S	S	S	CA/-
11/16" (.687")	11/16" (.687")	<b>7421</b>	S	S	-	BD/-
3/4" (.750")	1-3/4" (1.750")	<b>7414</b>	S	S	-	CA/-
1-1/8" (1.125")	1-3/4" (1.750")	<b>7415</b>	S	S	-	CA/-



# ROUNDED TRIM

## PRODUCT INFO

**ALLOY** 6463 Chemically Enhanced Architectural Grade Alloy, T5 Temper

**FINISH** Brite-Dip Anodized Finish, Per MIL-A-8625F

**CUT LENGTH** 3 Foot and 6 Foot Cut Lengths Available


**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)

**FAB** Punched and Countersunk Holes 6" on Center to accommodate #8 Screws


## ROUNDED EDGE TRIM

Covers	Outside Height (H)	SKU	3'	6'
3/4" (.756")	15/16" (.944")	<b>7426</b>	S	S
1" (.984")	1-11/64" (1.172")	<b>7427</b>	S	S



## ROUNDED TRIM

Covers	Outside Height (H)	SKU	3'	6'	12'
3/8" (.375")	5/32" (.156")	<b>7436</b>	S	S	-
1/2" (.500")	3/16" (.188")	<b>7437</b>	S	S	-
3/4" (.750")	3/16" (.188")	<b>7438</b>	S	S	S (CA)
1" (1.00")	3/16" (.188")	<b>7439</b>	S	S	-



# CORNERS

## CORNERS

Create cleaner corner transitions for your wall and wall paneling projects with our inside/outside corner extrusions. Our corner extrusions will advance installation time and improve the overall look of your wall project.

Protective Edge Molding Designed to Join Material at 90 Degrees for Outside and Inside Corners

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**FINISH** Mechanical Polish A2, Per MIL-A-8625F

**CUT LENGTH** 6 Foot Cut Length

**TOLERANCE** Standard System of Measurement Inch Material\*


**MET** American Society for Testing and Materials (ASTM)

Type	Fits (A)	Reveal (B)	SKU	Each
Outside	19/64"	39/64"	<b>7249</b>	S
Outside	1/4"	1/4"	<b>7889</b>	S
Inside	1/4"	1/4"	<b>7890</b>	S
Outside	1/2"	1/2"	<b>7891</b>	S
Inside	1/2"	3/16"	<b>7892</b>	S
Inside	5/32"	0.313"	<b>3352</b>	S (8' CA)
Outside	5/32"	0.455"	<b>3802</b>	S (8' CA)


### OUTSIDE




### INSIDE




### 7249



### 3352 - INSIDE




### 3802 - OUTSIDE



\* Clear Anodized



# J CAP EDGE TRIM

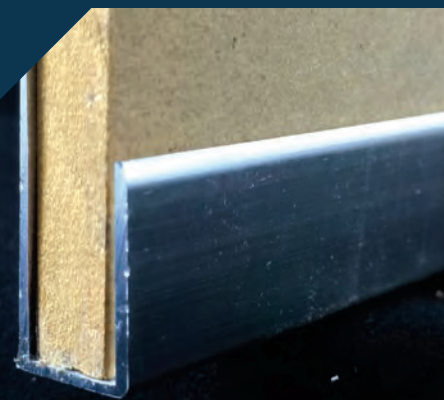

## PRODUCT INFO

**ALLOY** 6063 Ultra-Corrosive Resistant (CA or Polish)  
Architectural Grade Alloy, T5 Temper  
6463 Chemically Enhanced  
Architectural Grade Alloy, T5 Temper (BD)

**FINISH** Clear Anodized Finish, Per MIL-A-8625F

**CUT LENGTH** 6 Foot Cut Length




**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)

**FAB** Punched Holes 4" on Center

## J CAP EDGE TRIM

Fits	Outside Legs (A x B)	SKU	3'	6'	12'	Finish/Fab
1/16" (.068")	3/16" (.188") x 23/32" (.718")	<b>7408</b>	S	S	-	CA/-
3/32" (.110")	1/4" (.244") x 7/10" (.700")	<b>7983</b>	S	S	-	CA/-
7/64" (.116")	13/67" (.194") x 7/10" (.700")	<b>7984</b>	S	S	-	CA/-
1/8" (.144")	1/4" (.244") x 7/10" (.700")	<b>7985</b>	S	S	S (CA)	CA/-
5/32" (.164")	9/32" (.288") x 23/32" (.714")	<b>7422</b>	S	S	-	BD/Holes
3/16" (.198")	5/16" (.312") x 12/32" (.714")	<b>7423</b>	S	S	-	BD/Holes
1/4" (.260")	5/16" (.312") x 7/8" (.875")	<b>7424</b>	S	S	S (CA)	BD/Holes
1/4" (.280")	3/8" (.375") x 7/8" (.875")	<b>7986</b>	S	S	-	CA/-
5/16" (.324")	3/32" (.092") x 1" (1.00")	<b>7419</b>	S	S	-	CA/-
5/16" (.325")	21/32" (.662") x 1-11/64" (1.176")	<b>7425</b>	S	S	-	BD/Holes
3/8" (.383")	3/8" (.375") x 7/8" (.875")	<b>7409</b>	S	S	-	BD/-
1/2" (.515")	9/16" (.562") x 1-1/4" (1.246")	<b>7410</b>	S	S	-	CA/-
19/64" (.298")	3/8" (.375") x 15/16" (.940")	<b>7416</b>	S	S	-	CA/Holes
19/64" (.298")	5/8" (.625") x 1-1/4" (1.250")	<b>7417</b>	S	S	-	CA/Holes

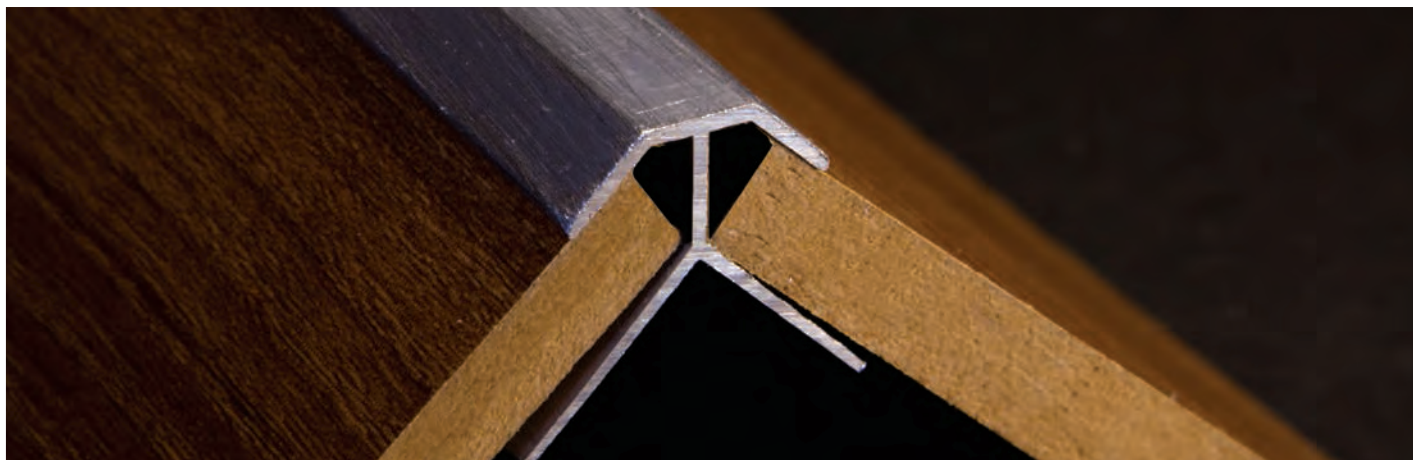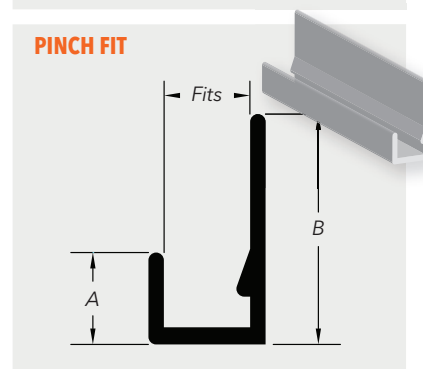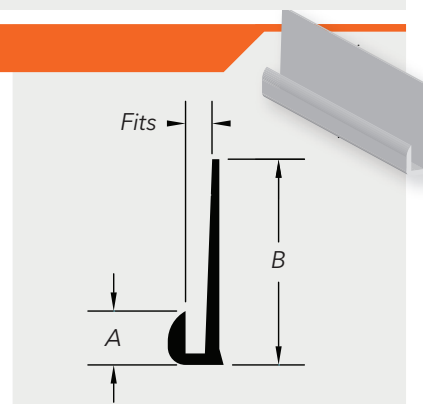


# DIVIDER BARS

## PRODUCT INFO

Divider Bars for joining material 1/16", 1/8", 1/4" and 1/2" thick.

FINISH	(CA) Clear Anodized. 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper (BDA) Brite-Dip Anodized. 6463 Chemically Enhanced Architectural Grade Alloy, T5 Temper	Fits (A)	Reveal (B)	SKU	3'	6'	8'	Finish
CUT LENGTH	6 Foot Cut Length. Inquire about 12' lengths.	1/16" (.070")	5/16" (.313")	7979	S	S	-	CA
		1/8" (.168")	1/2" (.500")	3355	S	S	S	CA
		1/2" (.500")	5/8" (.625")	7418	S	S	-	CA
		1/4" (.258")	1/2" (.500")	7420	S	S	-	BDA
TOLERANCE	Standard System of Measurement Inch Material*							
MET	American Society for Testing and Materials (ASTM)							



# H CONNECTORS

## PRODUCT INFO

H-Shaped connectors for joining material 9/64" and 1/4" thick.

ALLOY	6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper							
FINISH	Clear Anodized Finish, Per MIL-A-8625F							
CUT LENGTH	3 Foot and 6 Foot Cut Lengths							
TOLERANCE	Standard System of Measurement Inch Material*							
MET	American Society for Testing and Materials (ASTM)							
Fits (W)	Height (H)	SKU	3'	6'				
9/64" (.152")	1-3/64" (1.046")	7411	S	S				
1/4" (.270")	1-3/64" (1.046")	7412	S	S				



# H SECTIONS

## PRODUCT INFO

H-Shaped Aluminum Bar Stock. Fits material 1/2", 19/32", 7/8", 1" and 2" thick.

ALLOY	6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper							
FINISH	Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)							
CUT LENGTH	6 Foot Cut Length							
TOLERANCE	Standard System of Measurement Inch Material*							
MET	American Society for Testing and Materials (ASTM)							
Width (W)	Height (H)	Wall	SKU	Each				
1/2" (.500")	1-1/2" (1.500")	3/32" (.094")	7327	S				
1/2" (.500")	1-1/2" (1.500")	3/16" (.188")	5575	S				
1/2" (.500")	2-3/8" (2.375")	1/4" (.250")	4568	S				
19/32" (.600")	1-1/16" (1.060")	1/20" (.050")	5460	S				
7/8" (.910")	1-1/2" (1.500")	1/16" (.062")	1728	S				
1" (1.020")	1-3/4" (1.750")	1/20" (.050")	1707	S				
2" (2.00")	1-1/2" (1.500")	1/20" (.055")	2586	S				



# ANGLES

## PRODUCT INFO



90 Degree Angle Corner Type Square

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**CUT LENGTH** 3, 6, and 8 Foot Cut Lengths

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)



## MILL FINISH

**FINISH** Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)

**CUT LENGTH** 8 Foot Cut Length

Outside Legs ( AxB )	SKU	Each
<b>1/16" (.063") WALL THICKNESS</b>		
1/4" (.250") x 1/4" (.250")	9233	S
3/8" (.375") x 3/8" (.375")	9378	S
3/8" (.375") x 1/2" (.500")	1940	S
1/2" (.500") x 1/2" (.500")	1551	S
5/8" (.625") x 5/8" (.625")	7011	S
3/4" (.750") x 3/4" (.750")	2158	S
1" (1.00") x 1" (1.00")	2167	S
<b>1/8" (.125") WALL THICKNESS</b>		
1/2" (.500") x 1/2" (.500")	6144	S
1/2" (.500") x 1" (1.00")	2101	S
1/2" (.500") x 2" (2.00")	9382	S
5/8" (.625") x 5/8" (.625")	9379	S
3/4" (.750") x 3/4" (.750")	1202	S
7/8" (.875") x 7/8" (.875")	9380	S
1" (1.00") x 1" (1.00")	2091	S
1" (1.00") x 1-1/2" (1.500")	1554	S
1-1/4" (1.250") x 1-1/4" (1.250")	7022	S
1-1/2" (1.500") x 1-1/2" (1.500")	2073	S
1-1/2" (1.500") x 2" (2.00")	2776	S
1-3/4" (1.750") x 1-3/4" (1.750")	7027	S
1" (1.00") x 2" (2.00")	9381	S
2" (2.00") x 2" (2.00")	7025	S
<b>3/16" (.188") WALL THICKNESS</b>		
1" (1.00") x 1" (1.00")	7021	S
1-1/4" (1.250") x 1-1/4" (1.250")	7023	S
1-1/2" (1.500") x 1-1/2" (1.500")	7024	S
2" (2.00") x 2" (2.00")	7026	S
4" (4.00") x 4" (4.00")	7440	S
<b>1/4" (.250") WALL THICKNESS</b>		
1" (1.00") x 1" (1.00")	4096	S
1-1/4" (1.250") x 1-1/4" (1.250")	3754	S
1-1/2" (1.500") x 1-1/2" (1.500")	9383	S
1" (1.00") x 2" (2.00")	2528	S
2" (2.00") x 2" (2.00")	9384	S

## CLEAR ANODIZED FINISH

**FINISH** Clear Anodized Finish, Per MIL-A-8625F

**CUT LENGTH** 6 Foot Cut Length

Outside Legs ( AxB )	SKU	3'	6'	12'
<b>1/16" (.063") WALL THICKNESS</b>				
1/2" (.500") x 1/2" (.500")	1551	S	S	S
1/2" (.500") x 3/4" (.750")	1544*	-	-	S
1/2" (.500") x 1" (1.00")	7413	-	-	S
5/8" (.625") x 5/8" (.625")	7011	S	S	-
3/4" (.750") x 3/4" (.750")	1547*	S	S	-
3/4" (.750") x 3/4" (.750")	2158	S	S	S
1" (1.00") x 1" (1.00")	1030*	S	S	-
1" (1.00") x 1" (1.00")	2167	S	S	S
1-1/4" (1.250") x 1-1/4" (1.250")	1295	S	S	-
1-1/2" (1.500") x 1-1/2" (1.500")	1555*	-	-	S
1-1/2" (1.500") x 1-1/2" (1.500")	3365	S	S	-
1-3/4" (1.750") x 1-3/4" (1.750")	6093	S	S	-
2" (2.00") x 2" (2.00")	7692	S	S	-
1-1/2" (1.500") x 1/2" (0.500")	9436	-	-	S
<b>1/8" (.125") WALL THICKNESS</b>				
1/2" (.500") x 1/2" (.500")	6144	S	S	-
3/4" (.750") x 3/4" (.750")	1202	S	S	S
1" (1.00") x 1" (1.00")	2091	S	S	S
1-1/4" (1.250") x 1-1/4" (1.250")	7022	S	S	-
1-1/2" (1.500") x 1-1/2" (1.500")	2073	S	S	S
1-3/4" (1.750") x 1-3/4" (1.750")	7027	S	S	-
2" (2.00") x 2" (2.00")	7025	S	S	S


\* with Radiused Inside Tips



# CHANNELS

## PRODUCT INFO

<b>ALLOY</b>	6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper
<b>CUT LENGTH</b>	3, 6, and 8 Foot Cut Lengths
<b>TOLERANCE</b>	Standard System of Measurement Inch Material*
<b>MET</b>	American Society for Testing and Materials (ASTM)



## CHANNELS - 8' MILL FINISH

<b>FINISH</b>	Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)
<b>CUT LENGTH</b>	8 Foot Cut Length

Base (W)	Legs (H)	Fits	SKU	Each	Base (W)	Legs (H)	Fits	SKU	S
<b>1/16" (.062") WALL THICKNESS</b>					1-3/4" (1.750")	1" (1.00")	1-1/2"	<b>8111</b>	S
3/8" (.375")	3/8" (.375")	1/4"	<b>6515</b>	S	1-3/4" (1.750")	1-3/4" (1.750")	1-1/2"	<b>9347</b>	S
1/2" (.500")	1/2" (.500")	3/8"	<b>2303</b>	S (12' CA)	1-3/4" (1.750")	2" (2.00")	1-1/2"	<b>9348</b>	S
1/2" (.500")	3/4" (.750")	3/8"	<b>8105</b>	S (12' CA)	2" (2.00")	1/2" (.500")	1-3/4"	<b>8112</b>	S
1/2" (.500")	1" (1.00")	3/8"	<b>8104</b>	S	2" (2.00")	3/4" (.750")	1-3/4"	<b>9349</b>	S
13/20" (0.650")	4/5" (0.800")	13/25"	<b>4649</b>	S (12' CA)	2" (2.00")	1" (1.00")	1-3/4"	<b>1592</b>	S
3/4" (.750")	3/4" (.750")	5/8"	<b>8106</b>	S	2" (2.00")	1-1/2" (1.500")	1-3/4"	<b>9350</b>	S
15/16" (0.935")	9/16" (0.570")	4/5"	<b>6500</b>	S (12' CA)	2" (2.00")	2" (2.00")	1-3/4"	<b>9387</b>	S
1" (1.00")	1/2" (.500")	7/8"	<b>5863</b>	S	2" (2.00")	3" (3.00")	1-3/4"	<b>9388</b>	S
1" (1.00")	1" (1.00")	7/8"	<b>2746</b>	S	2-1/2" (2.500")	1" (1.00")	2-1/4"	<b>9389</b>	S
<b>3/32" (.094") WALL THICKNESS</b>					2-1/2" (2.500")	1-1/2" (1.500")	2-1/4"	<b>9390</b>	S
1/2" (.500")	1/2" (.500")	5/16"	<b>2525</b>	S	2-1/2" (2.500")	2" (2.00")	2-1/4"	<b>9391</b>	S
3/4" (.750")	3/4" (.750")	9/16"	<b>9339</b>	S	2-1/2" (2.500")	2-1/2" (2.500")	2-1/4"	<b>9392</b>	S
1" (1.00")	1" (1.00")	13/16"	<b>9340</b>	S	3" (3.00")	1" (1.00")	2-3/4"	<b>8113</b>	S
<b>1/8" (.125") WALL THICKNESS</b>					3" (3.00")	1-1/2" (1.500")	2-3/4"	<b>9351</b>	S
1/2" (.500")	1/2" (.500")	1/4"	<b>9341</b>	S	3" (3.00")	2" (2.00")	2-3/4"	<b>9352</b>	S
1/2" (.500")	3/4" (.750")	1/4"	<b>8108</b>	S	3" (3.00")	3" (3.00")	2-3/4"	<b>8102</b>	S
3/4" (.750")	3/8" (.375")	1/2"	<b>8114</b>	S	3" (3.00")	4" (4.00")	2-3/4"	<b>9353</b>	S
3/4" (.750")	1/2" (.500")	1/2"	<b>8115</b>	S	3-1/2" (3.500")	1" (1.00")	3-1/4"	<b>9354</b>	S
3/4" (.750")	3/4" (.750")	1/2"	<b>8186</b>	S	3-1/2" (3.500")	2" (2.00")	3-1/4"	<b>9355</b>	S
3/4" (.750")	1" (1.00")	1/2"	<b>1077</b>	S	4" (4.00")	1" (1.00")	3-3/4"	<b>8103</b>	S
1" (1.00")	1/2" (.500")	3/4"	<b>5710</b>	S	4" (4.00")	2" (2.00")	3-3/4"	<b>9356</b>	S
1" (1.00")	3/4" (.750")	3/4"	<b>8107</b>	S	4" (4.00")	3" (3.00")	3-3/4"	<b>9357</b>	S
1" (1.00")	1" (1.00")	3/4"	<b>7815</b>	S	4" (4.00")	4" (4.00")	3-3/4"	<b>9358</b>	S
1" (1.00")	1-1/2" (1.500")	3/4"	<b>9342</b>	S	<b>3/16" (.188") WALL THICKNESS</b>				
1" (1.00")	2" (2.00")	3/4"	<b>9343</b>	S	5" (5.00")	1" (1.00")	4-5/8"	<b>9359</b>	S
1-1/4" (1.250")	1" (1.00")	1"	<b>9344</b>	S	5" (5.00")	2" (2.00")	4-5/8"	<b>8119</b>	S
1-1/4" (1.250")	1-1/4" (1.250")	1"	<b>8109</b>	S	<b>1/4" (.250") WALL THICKNESS</b>				
1-1/2" (1.500")	1-1/2" (1.500")	1-1/4"	<b>8116</b>	S	2" (2.00")	1" (1.00")	1-1/2"	<b>9360</b>	S
1-1/2" (1.500")	1" (1.00")	1-1/4"	<b>9345</b>	S	2" (2.00")	2" (2.00")	1-1/2"	<b>8118</b>	S
1-1/2" (1.500")	1-1/2" (1.500")	1-1/4"	<b>9346</b>	S	3" (3.00")	1" (1.00")	2-1/2"	<b>9361</b>	S
1-1/2" (1.500")	2" (2.00")	1-1/4"	<b>9385</b>	S	3" (3.00")	2" (2.00")	2-1/2"	<b>9362</b>	S
1-3/4" (1.750")	1/2" (.500")	1-1/2"	<b>9386</b>	S	4" (4.00")	1" (1.00")	3-1/2"	<b>9363</b>	S
1-3/4" (1.750")	3/4" (.750")	1-1/2"	<b>8110</b>	S	4" (4.00")	2" (2.00")	3-1/2"	<b>9364</b>	S




## CHANNELS - 6' CLEAR ANODIZED

**FINISH** Clear Anodized Finish, Per MIL-A-8625F


**CUT LENGTH** 6 Foot Cut Length

Base (W)	Legs (H)	Fits	SKU	3'	6'	Base (W)	Legs (H)	Fits	SKU	3'	6'
<b>1/16" (.062") WALL THICKNESS</b>						<b>3/32" (.094") WALL THICKNESS</b>					
3/8" (.375")	3/8" (.375")	1/4"	<b>7082<sup>1</sup></b>	S	S	1-3/4" (1.750")	13/16" (.813")	1-5/8"	<b>2900</b>	S	S
3/8" (.375")	7/16" (.438")	1/4"	<b>7401</b>	S	S	2" (2.00")	3/4" (.750")	1-7/8"	<b>2137</b>	S	S
3/8" (.375")	1/2" (.500")	1/4"	<b>6662</b>	S	S	<b>1/8" (.125") WALL THICKNESS</b>					
3/8" (.375")	15/16" (.938")	1/4"	<b>7402</b>	S	S	3/4" (.750")	1/2" (.500")	9/16"	<b>2022</b>	S	S
1/2" (.500")	5/16" (.313")	3/8"	<b>7403</b>	S	S	2" (2.00")	3/4" (.750")	1-13/16"	<b>2164</b>	S	S
1/2" (.500")	1/2" (.500")	3/8"	<b>2303</b>	S	S (12' CA)	<b>3/16" (.188") WALL THICKNESS</b>					
5/8" (.625")	9/16" (.563")	1/2"	<b>7404</b>	S	S	3/4" (.750")	1" (1.00")	1/4"	<b>3381</b>	S	S
5/8" (.625")	7/8" (.875")	1/2"	<b>1195</b>	S	S	17/32" (.531")	1" (1.00")	9/32"	<b>7131</b>	S	S
11/16" (.687")	1/2" (.500")	9/16"	<b>1801</b>	S	S (12' CA)	3/4" (.750")	3/4" (.750")	1/2"	<b>4434</b>	S	S
3/4" (.750")	1/2" (.500")	5/8"	<b>1665</b>	S	S	3/4" (.750")	1" (1.00")	1/2"	<b>1077</b>	S	S
7/8" (.875")	5/16" (.313")	3/4"	<b>7405</b>	S	S (12' CA)	1" (1.00")	3/4" (.750")	3/4"	<b>7406</b>	S	S
1" (1.00")	1/2" (.500")	7/8"	<b>5863</b>	S	S	2" (2.00")	2" (2.00")	1-3/4"	<b>7071</b>	S	S
1" (1.00")	1" (1.00")	7/8"	<b>2746</b>	S	S						
1-1/8" (1.125")	1/2" (.500")	1"	<b>1435</b>	S	S						
1-1/8" (1.125")	13/16" (.813")	1"	<b>7407</b>	S	S						
1-1/2" (1.500")	3/4" (.750")	1-3/8"	<b>2046</b>	S	S						

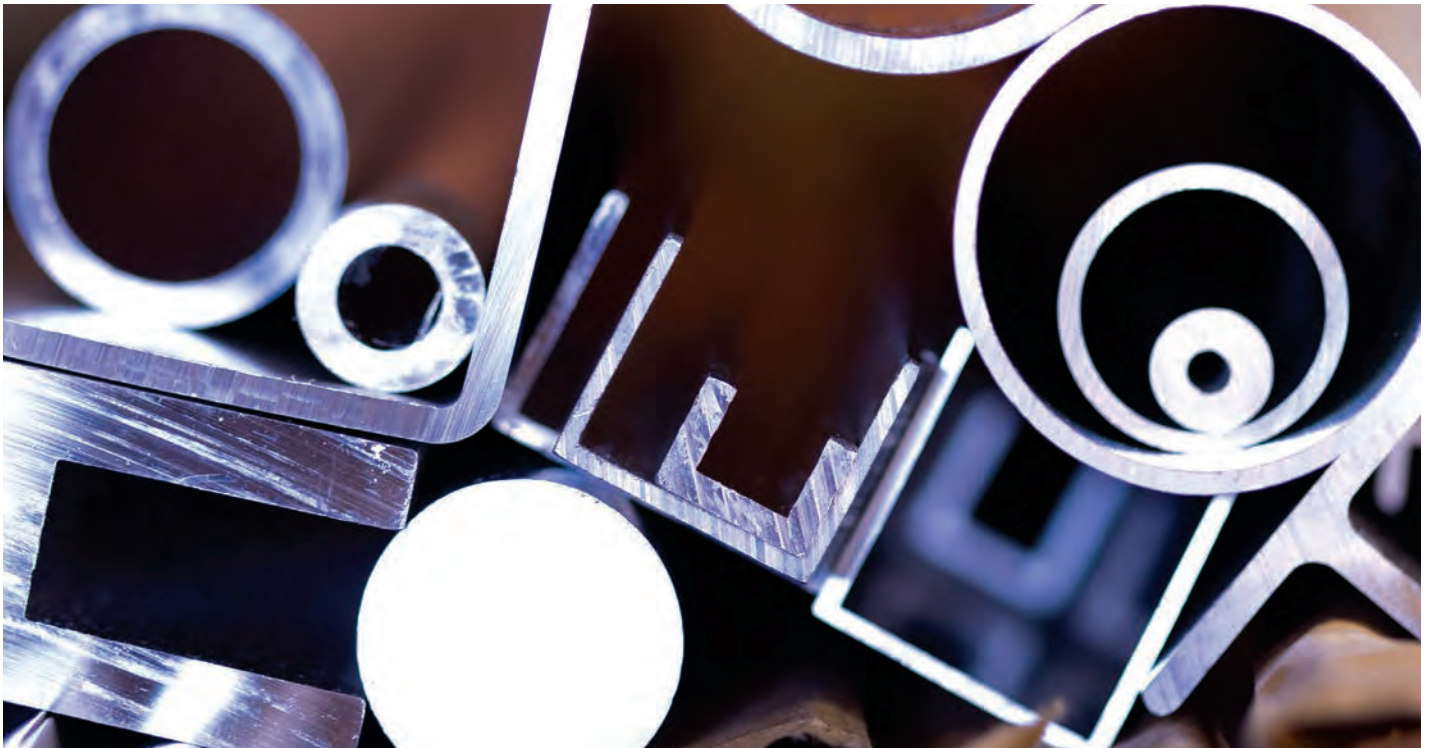

<sup>1</sup> Features 0.020" Radiused Corners



# TEES

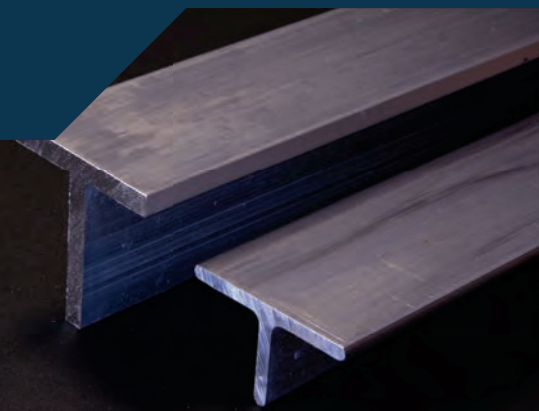

## PRODUCT INFO

<b>ALLOY</b>	6061 Multi-Purpose Structural Grade Aluminum, T6 Temper*
<b>FINISH</b>	Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)
<b>CUT LENGTH</b>	8 Foot Cut Length
<b>TOLERANCE</b>	Standard System of Measurement Inch Material*
<b>MET</b>	American Society for Testing and Materials (ASTM)

Width (W)	Height (H)	Wall	SKU	Each
5/8" (.625")	1/2" (.500")	1/20" (.050")	<b>6030</b>	S
1-1/4" (1.250")	1" (1.00")	1/16" (.062")	<b>2163</b>	S
1-1/4" (1.250")	1" (1.00")	1/16" (.062")	<b>1573</b>	S
1-1/2" (1.500")	3/4" (.750")	1/8" (.125")	<b>3159</b>	S
1-1/2" (1.500")	7/8" (.875")	1/8" (.125")	<b>2651</b>	S
1-1/2" (1.500")	1" (1.00")	1/20" (.050")	<b>1221</b>	S
1-1/2" (1.500")	1-1/2" (1.500")	3/16" (.188")	<b>1356</b>	S
2" (2.00")	1" (1.00")	1/8" (.125")	<b>1481</b>	S
2" (2.00")	1-1/4" (1.250")	1/8" (.125")	<b>7108</b>	S
1-1/4" (1.250")	3/4" (.750")	1/16" (.062")	<b>9157</b>	S
1-1/4" (1.250")	1" (1.00")	1/16" (.062")	<b>9158</b>	S
1/2" (.500")	1/4" (.250")	1/8" (.125")	<b>9159</b>	S
1" (1.00")	1/2" (.500")	1/8" (.125")	<b>9160</b>	S
1" (1.00")	1" (1.00")	1/8" (.125")	<b>9161</b>	S
2" (2.00")	1-1/2" (1.500")	1/8" (.125")	<b>9162</b>	S
3" (3.00")	1-1/2" (1.500")	1/8" (.125")	<b>9163</b>	S
1" (1.00")	1" (1.00")	3/16" (.188")	<b>9164</b>	S
2" (2.00")	1-1/2" (1.500")	3/16" (.188")	<b>9165</b>	S
3" (3.00")	1-1/2" (1.500")	3/16" (.188")	<b>9166</b>	S

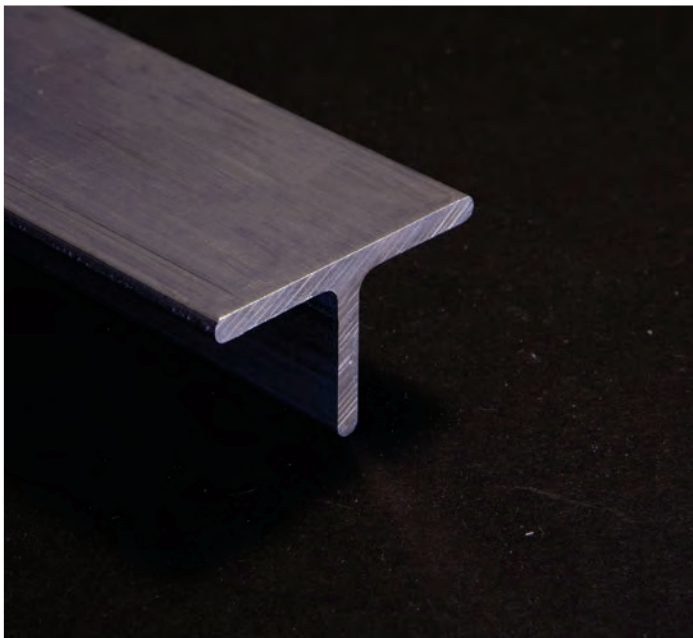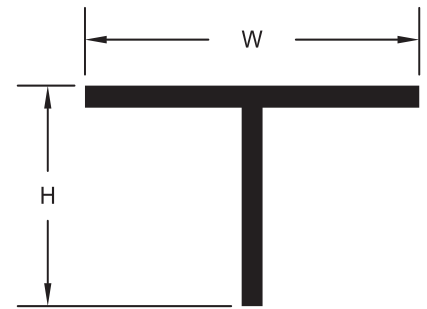


BUY MORE AND  
**SAVE**



CONTACT US TODAY  
FOR SPECIAL PRICING




# Z SECTIONS

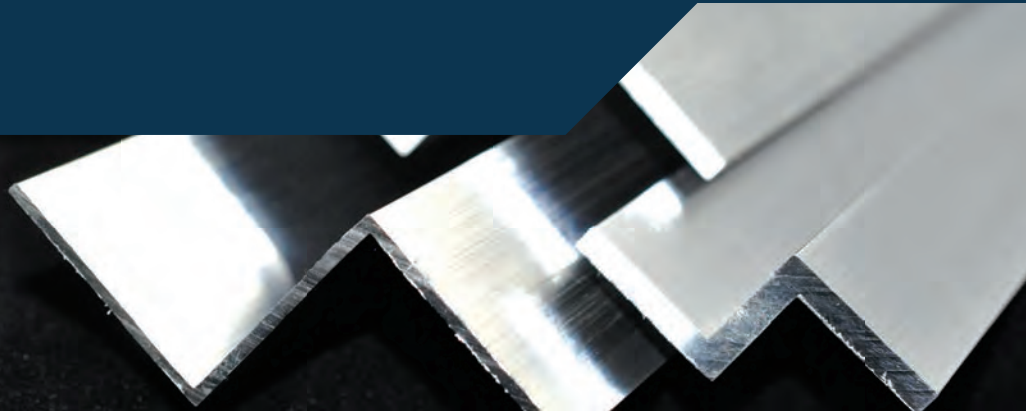

## PRODUCT INFO

<b>ALLOY</b>	6061 Multi-Purpose Structural Grade Aluminum, T6 Temper*
<b>FINISH</b>	Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)
<b>CUT LENGTH</b>	6 Foot Cut Length
<b>TOLERANCE</b>	Standard System of Measurement Inch Material*
<b>MET</b>	American Society for Testing and Materials (ASTM)

Height (A)	Legs (B)	Wall	SKU	Each
1/2" (.500")	3/4" (.750")	1/16" (.062")	9241	S
5/8" (.625")	3/4" (.750")	1/16" (.062")	9242	S
3/4" (.750")	1" (1.00")	1/16" (.062")	9243	S
1" (1.00")	3/4" (.750")	1/16" (.062")	9244	S
1" (1.00")	1" (1.00")	1/16" (.062")	9245	S
1-1/8" (1.125")	1-1/8" (1.125")	1/16" (.062")	9246	S
1/2" (.500")	3/4" (.750")	1/8" (.125")	9247	S
5/8" (.625")	3/4" (.750")	1/8" (.125")	9248	S
3/4" (.750")	1" (1.00")	1/8" (.125")	9249	S
1" (1.00")	3/4" (.750")	1/8" (.125")	9250	S
1" (1.00")	1" (1.00")	1/8" (.125")	9251	S
1-1/8" (1.125")	1-1/8" (1.125")	1/8" (.125")	9252	S

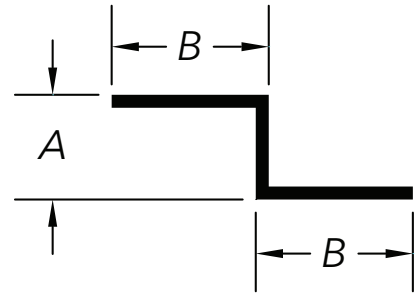


# HALF ROUNDS

## PRODUCT INFO

<b>ALLOY</b>	6061 Multi-Purpose Structural Grade Aluminum, T6 Temper.
<b>FINISH</b>	Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)
<b>CUT LENGTH</b>	6 Foot Cut Length
<b>TOLERANCE</b>	Standard System of Measurement Inch Material*
<b>MET</b>	American Society for Testing and Materials (ASTM)

## HALF ROUNDS



OD	SKU	Each
1/4" (.250")	9235	S
3/8" (.375")	9236	S
1/2" (.500")	9237	S
5/8" (.625")	9238	S
3/4" (.750")	9239	S
1" (1.00")	9240	S



# HEXES

## PRODUCT INFO

<b>ALLOY</b>	6061 Multi-Purpose Structural Grade Aluminum, T6 Temper*
<b>FINISH</b>	Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)
<b>CUT LENGTH</b>	6 Foot Cut Length
<b>TOLERANCE</b>	Standard System of Measurement Inch Material*
<b>MET</b>	American Society for Testing and Materials (ASTM)



**HOLLOW HEXES**

## METRIC HEXES

OD	SKU	Each
5 mm (0.197")	<b>9167</b>	S
6 mm (0.236")	<b>9168</b>	S
7 mm (0.276")	<b>9169</b>	S
8 mm (0.315")	<b>9170</b>	S
10 mm (0.394")	<b>9171</b>	S
12 mm (0.472")	<b>9172</b>	S
14 mm (0.551")	<b>9173</b>	S
16 mm (0.630")	<b>9174</b>	S
18 mm (0.709")	<b>9175</b>	S
20 mm (0.787")	<b>9176</b>	S
25 mm (0.984")	<b>9177</b>	S
30 mm (1.181")	<b>9178</b>	S

## IMPERIAL HEXES

OD	SKU	Each
1/8" (0.125")	<b>9179</b>	S
3/16" (0.188")	<b>9180</b>	S
1/4" (0.250")	<b>9181</b>	S
5/16" (0.313")	<b>9182</b>	S
3/8" (0.375")	<b>9183</b>	S
7/16" (.438")	<b>9184</b>	S
1/2" (.500")	<b>9185</b>	S
9/16" (.563")	<b>9186</b>	S
5/8" (.625")	<b>9187</b>	S
11/16" (.688")	<b>9188</b>	S
3/4" (.750")	<b>9189</b>	S
7/8" (.875")	<b>9190</b>	S
1" (1.00")	<b>9191</b>	S

## HOLLOW HEXES


OD	SKU	Each
<b>1/8" (.125") WALL THICKNESS</b>		
1/2"	<b>9149</b>	S
5/8"	<b>9150</b>	S
3/4"	<b>9151</b>	S
1"	<b>9152</b>	S

OD	SKU	Each
1-1/4"	<b>9153</b>	S
1-1/2"	<b>9154</b>	S
<b>1/4" (.250") WALL THICKNESS</b>		
1"	<b>9155</b>	S
1-1/2"	<b>9156</b>	S

# SOLID RODS

## PRODUCT INFO

<b>ALLOY</b>	6061 Multi-Purpose Structural Grade Aluminum, T6 Temper*
<b>FINISH</b>	Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)
<b>CUT LENGTH</b>	6 Foot Cut Length
<b>TOLERANCE</b>	Standard System of Measurement Inch Material*
<b>MET</b>	American Society for Testing and Materials (ASTM)



OD	SKU	Each
5 mm (0.197")	<b>7856</b>	S
6 mm (0.236")	<b>7857</b>	S
7 mm (0.276")	<b>7858</b>	S
8 mm (0.315")	<b>7859</b>	S
9 mm (0.354")	<b>7860</b>	S
10 mm (0.394")	<b>7861</b>	S

OD	SKU	Each
12 mm (0.472")	<b>7862</b>	S
14 mm (0.551")	<b>7863</b>	S
15 mm (0.591")	<b>7864</b>	S
16 mm (0.630")	<b>7865</b>	S
20 mm (0.787")	<b>7866</b>	S
25 mm (0.984")	<b>7867</b>	S

# METRIC FLAT BARS

## PRODUCT INFO

<b>ALLOY</b>	6061 Multi-Purpose Structural Grade Aluminum, T6 Temper*
<b>CUT LENGTH</b>	6 Foot Cut Length
<b>FINISH</b>	Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)
<b>TOLERANCE</b>	Standard System of Measurement Inch Material*
<b>MET</b>	American Society for Testing and Materials (ASTM)



Width (B)	SKU	3'	6'
<b>2MM WALL THICKNESS</b>			
5mm (.197")	<b>9192</b>	-	S
10mm (.394")	<b>7541</b>	-	S
15mm (.591")	<b>7540</b>	-	S
20mm (.787")	<b>7539</b>	-	S
25mm (.984")	<b>7538</b>	-	S
30mm (1.181")	<b>9193</b>	-	S
40mm (1.575")	<b>9194</b>	-	S
50mm (1.969")	<b>9195</b>	-	S
<b>3MM WALL THICKNESS</b>			
5mm (.197")	<b>9196</b>	-	S
10mm (.394")	<b>7537</b>	-	S
15mm (.591")	<b>7536</b>	-	S
20mm (.787")	<b>7535</b>	-	S
25mm (.984")	<b>7534</b>	-	S
30mm (1.181")	<b>9197</b>	-	S
40mm (1.575")	<b>9198</b>	-	S
50mm (1.969")	<b>9199</b>	-	S
<b>4MM WALL THICKNESS</b>			
5mm (.197")	<b>9200</b>	-	S
10mm (.394")	<b>7533</b>	-	S
15mm (.591")	<b>7532</b>	-	S
20mm (.787")	<b>7531</b>	-	S
25mm (.984")	<b>7530</b>	-	S
30mm (1.181")	<b>9201</b>	-	S
40mm (1.575")	<b>9202</b>	-	S
50mm (1.969")	<b>9203</b>	-	S
<b>5MM WALL THICKNESS</b>			
5mm (.197")	<b>9204</b>	-	S
10mm (.394")	<b>7529</b>	-	S
15mm (.591")	<b>7528</b>	-	S
20mm (.787")	<b>7527</b>	-	S
25mm (.984")	<b>7526</b>	-	S
30mm (1.181")	<b>9205</b>	-	S
40mm (1.575")	<b>9206</b>	-	S
50mm (1.969")	<b>9207</b>	-	S
<b>6MM WALL THICKNESS</b>			
5mm (.197")	<b>7842</b>	-	S
10mm (.394")	<b>7525</b>	-	S
15mm (.591")	<b>7524</b>	-	S
20mm (.787")	<b>7523</b>	-	S
25mm (.984")	<b>7522</b>	-	S
30mm (1.181")	<b>9208</b>	-	S
40mm (1.575")	<b>9209</b>	-	S
50mm (1.969")	<b>9210</b>	-	S
<b>8MM WALL THICKNESS</b>			
5mm (.197")	<b>7843</b>	-	S
10mm (.394")	<b>7521</b>	-	S
15mm (.591")	<b>7520</b>	-	S
20mm (.787")	<b>7519</b>	-	S
25mm (.984")	<b>7518</b>	-	S

Width (B)	SKU	3'	6'
30mm (1.181")	<b>9211</b>	-	S
40mm (1.575")	<b>9212</b>	-	S
50mm (1.969")	<b>9213</b>	-	S
<b>10MM WALL THICKNESS</b>			
10mm (.394")	<b>7517</b>	-	S
15mm (.591")	<b>7516</b>	-	S
20mm (.787")	<b>7515</b>	-	S
25mm (.984")	<b>7514</b>	-	S
30mm (1.181")	<b>9214</b>	-	S
40mm (1.575")	<b>7844</b>	-	S
50mm (1.969")	<b>7845</b>	-	S
<b>15MM WALL THICKNESS</b>			
15mm (.591")	<b>9215</b>	S	S
20mm (.787")	<b>9216</b>	S	S
30mm (1.181")	<b>9217</b>	S	S
40mm (1.575")	<b>9218</b>	S	S
50mm (1.969")	<b>9219</b>	S	S
<b>20MM WALL THICKNESS</b>			
20mm (.787")	<b>9220</b>	S	S
30mm (1.181")	<b>9221</b>	S	S
40mm (1.575")	<b>9222</b>	S	S
50mm (1.969")	<b>9223</b>	S	S
<b>25MM WALL THICKNESS</b>			
25mm (.984")	<b>9224</b>	S	S
40mm (1.575")	<b>9225</b>	S	S
50mm (1.969")	<b>9226</b>	S	S
<b>30MM WALL THICKNESS</b>			
30mm (1.181")	<b>9227</b>	S	S
40mm (1.575")	<b>9228</b>	S	S
50mm (1.969")	<b>9229</b>	S	S
<b>40MM WALL THICKNESS</b>			
40mm (1.575")	<b>9230</b>	S	S
50mm (1.969")	<b>9231</b>	S	S
<b>50MM WALL THICKNESS</b>			
50mm (1.969")	<b>9232</b>	S	S



# IMPERIAL FLAT BARS

## PRODUCT INFO

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper  
*Unless otherwise specified*

**FINISH** Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)



Width (A)	SKU	4'	6'	8'	12'
<b>1/16" (.062") WALL THICKNESS - 6061 ALLOY</b>					
1/8" (.125")	9258	-	S	-	-
1/4" (.250")	9259	-	S	-	-
3/8" (.375")	9260	-	S	-	-
1/2" (.500")	2592	-	S	-	S (CA)
5/8" (.625")	9261	-	S	-	-
3/4" (.750")	2729	-	S	-	-
7/8" (.875")	9262	-	S	-	-
1" (1.00")	4507	-	S	-	-
1-1/4" (1.250")	5695	-	S	-	-
1-1/2" (1.500")	6364	-	S	-	-
1-3/4" (1.750")	9263	-	S	-	-
2-1/4" (2.250")	9264	-	S	-	-
2-1/2" (2.500")	3794	-	S	-	-
2-3/4" (2.750")	9265	-	S	-	-
3" (3.00")	9266	-	S	-	-
<b>3/32" (.094") WALL THICKNESS - 6061 ALLOY</b>					
3/8" (.375")	9267	-	S	-	-
1/2" (.500")	9268	-	S	-	-
2" (2.00")	9269	-	S	-	-
3" (3.00")	9270	-	S	-	-
<b>1/8" (.125") WALL THICKNESS</b>					
1/2" (.500")	1058	-	-	S	S (CA)
5/8" (.625")	4978	-	-	S	-
3/4" (.750")	2126	-	-	S	S (CA)
1" (1.00")	4271	-	-	S	-
1-1/4" (1.250")	1626	-	-	S	-
1-1/2" (1.500")	6313	-	-	S	S (CA)
2" (2.00")	1584	-	-	S	-
<b>3/16" (.188") WALL THICKNESS</b>					
1/2" (.500")	1751	-	-	S	-
3/4" (.750")	8095	-	-	S	-
1" (1.00")	2094	-	-	S	-
1-1/4" (1.250")	9297	-	-	S	-
1-1/2" (1.500")	8096	-	-	S	-
2" (2.00")	5352	-	-	S	-
<b>1/4" (.250") WALL THICKNESS</b>					
1/4" (.250")	9299	-	-	S	-
1/2" (.500")	8097	-	-	S	-
3/4" (.750")	8098	-	-	S	-
1" (1.00")	2342	-	-	S	-
1-1/4" (1.250")	8386	-	-	S	-
1-1/2" (1.500")	4530	-	-	S	-
1-3/4" (1.750")	9303	-	-	S	-
2" (2.00")	8099	-	-	S	-
<b>3/8" (.375") WALL THICKNESS</b>					
3/8" (.375")	9305	-	-	S	-
1/2" (.500")	9306	-	-	S	-
5/8" (.625")	8100	-	-	S	-
3/4" (.750")	9308	-	-	S	-
1" (1.00")	9309	-	-	S	-
1-1/4" (1.250")	9310	-	-	S	-

Width (A)	SKU	4'	6'	8'	12'
1-1/2" (1.500")	9311	-	-	S	-
2" (2.00")	9312	-	-	S	-
<b>1/2" (.500") WALL THICKNESS</b>					
1/2" (.500")	9313	S	S	S	-
3/4" (.750")	9314	S	S	S	-
1" (1.00")	9315	S	S	S	-
1-1/4" (1.250")	9316	S	S	S	-
1-1/2" (1.500")	9317	S	S	S	-
2" (2.00")	8101	S	S	S	-
<b>5/8" (.625") WALL THICKNESS</b>					
5/8" (.625")	9319	S	S	S	-
1" (1.00")	9320	S	S	S	-
1-1/4" (1.250")	9321	S	S	S	-
1-1/2" (1.500")	9322	S	S	S	-
2" (2.00")	9323	S	S	S	-
<b>3/4" (.750") WALL THICKNESS</b>					
3/4" (.750")	9324	S	S	S	-
1" (1.00)	9325	S	S	S	-
1-1/2" (1.500")	9326	S	S	S	-
1-3/4" (1.750")	9327	S	S	S	-
2" (2.00")	9328	S	S	S	-
<b>7/8" (.875") WALL THICKNESS</b>					
7/8" (.875")	9329	S	S	S	-
1" (1.00")	9330	S	S	S	-
2" (2.00")	9331	S	S	S	-
<b>1" (1.00") WALL THICKNESS</b>					
1" (1.00")	9332	S	S	S	-
1-1/4" (1.250")	9333	S	S	S	-
1-1/2" (1.500")	9334	S	S	S	-
1-3/4" (1.750")	9335	S	S	S	-
2" (2.00")	9336	S	S	S	-

## RADIUSED CORNERS (RC)

### 1/16" (.062") WALL THICKNESS (.031" RC)

1/4" (.250")	9271	-	S	-	-
1/2" (.500")	2840	-	S	-	-
1" (1.00")	7846	-	S	-	-
1-1/2" (1.500")	3995	-	S	-	-
2" (2.00")	7847	-	S	-	-

### 3/32" (.094") WALL THICKNESS (.031" RC)

1/2" (.500")	8195	-	S	-	-
--------------	------	---	---	---	---

### 3/32" (.094") WALL THICKNESS (.047" RC)


3/4" (.750")	2448	-	S	-	-
--------------	------	---	---	---	---

### 1/8" (.125") WALL THICKNESS (.031" RC)

1/4" (.250")	6914	-	S	-	-
1" (1.00")	7849	-	S	-	S (CA)
2" (2.00")	7850	-	S	-	S (CA)
2-1/2" (2.500")	5323	-	S	-	-

Width (A)	SKU	4'	6'	8'	12'
<b>1/8" (.125") WALL THICKNESS (.063" RC)</b>					
5/8" (.625")	<b>1022</b>	-	S	-	-
1-1/2" (1.500")	<b>2742</b>	-	S	-	-
<b>3/16" (.188") WALL THICKNESS (.094" RC)</b>					
1/2" (.500")	<b>1352</b>	-	S	-	-
1" (1.00")	<b>9276</b>	-	S	-	-
<b>1/4" (.250") WALL THICKNESS (.063" RC)</b>					
1/4" (.250")	<b>9277</b>	-	S	-	-
1/2" (.500")	<b>7852</b>	-	S	-	-
3/4" (.750")	<b>9278</b>	-	S	-	-
1" (1.00")	<b>7853</b>	-	S	-	-
1-1/2" (1.500")	<b>7854</b>	-	S	-	-
2" (2.00")	<b>7855</b>	-	S	-	-
<b>3/8" (.375") WALL THICKNESS (.063" RC)</b>					
3/8" (.375")	<b>9279</b>	-	S	-	-
5/8" (.625")	<b>1642</b>	-	S	-	-
3/4" (.750")	<b>9280</b>	-	S	-	-
1" (1.00")	<b>9281</b>	-	S	-	-
1-1/2" (1.500")	<b>9282</b>	-	S	-	-
2" (2.00")	<b>9283</b>	-	S	-	-

Width (A)	SKU	4'	6'	8'	12'
<b>7/16" (.438") WALL THICKNESS (.031" RC)</b>					
7/16" (.438")	<b>9284</b>	-	S	-	-
3/4" (.750")	<b>1748</b>	-	S	-	-
<b>1/2" (.500") WALL THICKNESS</b>					
5/8" (.625")	<b>9285</b>	S	S	-	-
1" (1.00")	<b>5534</b>	S	S	-	-
1-1/2" (1.500")	<b>9286</b>	S	S	-	-
2" (2.00")	<b>9287</b>	S	S	-	-
<b>5/8" (.625") WALL THICKNESS</b>					
5/8" (.625")	<b>9288</b>	S	S	-	-
1" (1.00")	<b>9289</b>	S	S	-	-
2" (2.00")	<b>6494</b>	S	S	-	-
<b>3/4" (.750") WALL THICKNESS</b>					
3/4" (.750")	<b>9290</b>	S	S	-	-
1" (1.00")	<b>9291</b>	S	S	-	-
1-1/2" (1.500")	<b>9292</b>	S	S	-	-
1-3/4" (1.750")	<b>3631</b>	S	S	-	-
<b>1" (1.00") WALL THICKNESS</b>					
1" (1.00")	<b>9293</b>	S	S	-	-
1-1/5" (1.200")	<b>9294</b>	S	S	-	-
2" (2.00")	<b>9295</b>	S	S	-	-

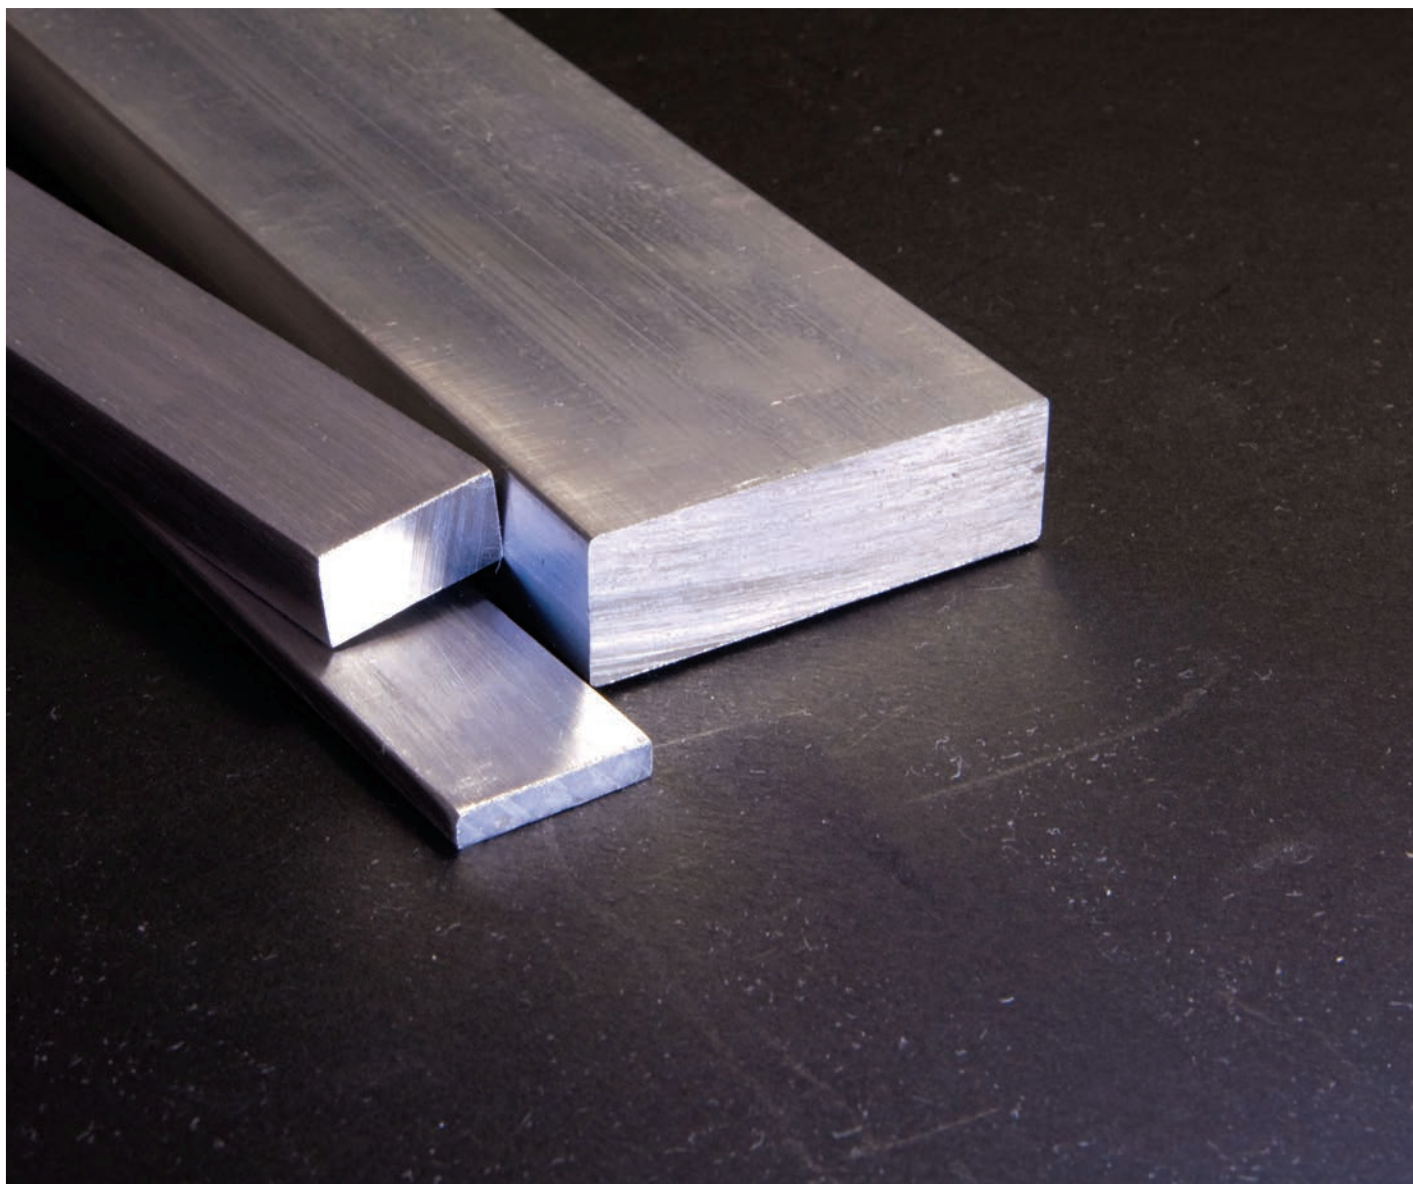

# ROUND TUBES


## PRODUCT INFO

Hollow Round Tubes

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)



## MILL FINISH

**FINISH** Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)

**CUT LENGTH** 8 Foot Cut Length

OD x ID	SKU	Each
1/4" x 1/8" (.250" x .120")	7461	S
3/8" x 9/64" (.375" x .145")	5541	S
3/8" x 15/64" (.375" x .234")	5886	S
1/2" x 17/64" (.500" x .270")	7448	S
1/2" x 3/8" (.500" x .370")	5909	S
9/16" x 3/8" (.563" x .327")	5830	S
5/8" x 17/32" (.625" x .528")	6923	S
3/4" x 5/8" (.750" x .620")	5944	S
7/8" x 7/16" (.875" x .438")	5296	S
1" x 7/8" (1.00" x .870")	5777	S
1-1/2" x 1-3/8" (1.500" x 1.370")	5725	S
1-5/8" x 1-13/32" (1.625" x 1.407")	6314	S

## CLEAR ANODIZED FINISH

**FINISH** Clear Anodized Finish, Per MIL-A-8625F

**CUT LENGTH** 6 Foot Cut Length

OD x ID	SKU	Each
1/4" x 1/8" (.250" x .120")	7461	S
3/8" x 9/64" (.375" x .145")	5541	S
1/2" x 3/8" (.500" x .370")	5909	S
5/8" x 29/64" (.625" x .495")	5711	S
3/4" x 5/8" (.750" x .620")	5944	S
7/8" x 47/64" (.875" x .745")	6899	S
1" x 7/8" (1.00" x .870")	5777	S
1-1/2" x 1-3/8" (1.500" x 1.370")	5725	S
1-5/8" x 1-7/32" (1.625" x 1.218")	6937	S
2-3/8" x 2-1/16" (2.375" x 2.067")	7646	S

# SCHEDULE 40 PIPES

## PRODUCT INFO


**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**FINISH** Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)

**CUT LENGTH** 5 Foot Lengths; 10 Foot Available on Request

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)



OD	Wall	SKU	Each
1.050" OD x .113" Wall	NPS 3/4 Schedule 40	7596	S
1.315" OD x .133" Wall	NPS 1 Schedule 40	7644	S
1.660" OD x .140" Wall	NPS 1 1/4 Schedule 40	7645	S
1.900" OD x .145" Wall	NPS 1 1/2 Schedule 40	7595	S
2.375" OD x .154" Wall	NPS 2 Schedule 40	7646	S

# SQUARE TUBES

## PRODUCT INFO

**ALLOY** 6063 Ultra-Corrosive Resistant Architectural Grade Alloy, T5 Temper

**FINISH** Mill Finish, Unpolished Per American Society for Testing and Materials (ASTM)

**CUT LENGTH** 8 Foot Cut Length

**TOLERANCE** Standard System of Measurement Inch Material\*

**MET** American Society for Testing and Materials (ASTM)



OD	Wall	SKU	8'
1/2" (0.500")	1/16" (.063")	7695	S
3/4" (0.750")	1/16" (.063")	8243	S
1" (1.00")	1/16" (.063")	8244	S
2" (2.00")	3/16" (.188")	8883	S



# CONVERSION CHART

## FRACTION - INCHES TO MILLIMETERS

FRACTION	DECIMAL	MM	FRACTION	DECIMAL	MM	FRACTION	DECIMAL	MM	FRACTION	DECIMAL	MM
1/32	0.0313	0.7938	25/32	0.7813	19.8438	1-17/32	1.5313	38.8938	2-9/32	2.2813	57.9438
1/16	0.0625	1.5875	13/16	0.8125	20.6375	1-9/16	1.5625	39.6875	2-5/16	2.3125	58.7375
3/32	0.0938	2.3813	27/32	0.8438	21.4313	1-19/32	1.5938	40.4813	2-11/32	2.3438	59.5313
1/8	0.1250	3.1750	7/8	0.8750	22.2250	1-5/8	1.6250	41.2750	2-3/8	2.3750	60.3250
5/32	0.1563	3.9688	29/32	0.9063	23.0188	1-21/32	1.6563	42.0688	2-13/32	2.4063	61.1188
3/16	0.1875	4.7625	15/16	0.9375	23.8125	1-11/16	1.6875	42.8625	2-7/16	2.4375	61.9125
7/32	0.2188	5.5563	31/32	0.9688	24.6063	1-23/32	1.7188	43.6563	2-15/32	2.4688	62.7063
1/4	0.2500	6.3500	1	1.0000	25.4000	1-3/4	1.7500	44.4500	2-1/2	2.5000	63.5000
9/32	0.2813	7.1438	1-1/32	1.0313	26.1938	1-25/32	1.7813	45.2438	2-17/32	2.5313	64.2938
5/16	0.3125	7.9375	1-1/16	1.0625	26.9875	1-13/16	1.8125	46.0375	2-9/16	2.5625	65.0875
11/32	0.3438	8.7313	1-3/32	1.0938	27.7813	1-27/32	1.8438	46.8313	2-19/32	2.5938	65.8813
3/8	0.3750	9.5250	1-1/8	1.1250	28.5750	1-7/8	1.8750	47.6250	2-5/8	2.6250	66.6750
13/32	0.4063	10.3188	1-5/32	1.1563	29.3688	1-29/32	1.9063	48.4188	2-21/32	2.6563	67.4688
7/16	0.4375	11.1125	1-3/16	1.1875	30.1625	1-15/16	1.9375	49.2125	2-11/16	2.6875	68.2625
15/32	0.4688	11.9063	1-7/32	1.2188	30.9563	1-31/32	1.9688	50.0063	2-23/32	2.7188	69.0563
1/2	0.5000	12.7000	1-1/4	1.2500	31.7500	2	2.0000	50.8000	2-3/4	2.7500	69.8500
17/32	0.5313	13.4938	1-9/32	1.2813	32.5438	2-1/32	2.0313	51.5938	2-25/32	2.7813	70.6438
9/16	0.5625	14.2875	1-5/16	1.3125	33.3375	2-1/16	2.0625	52.3875	2-13/16	2.8125	71.4375
19/32	0.5938	15.0813	1-11/32	1.3438	34.1313	2-3/32	2.0938	53.1813	2-27/32	2.8438	72.2313
5/8	0.6250	15.8750	1-3/8	1.3750	34.9250	2-1/8	2.1250	53.9750	2-7/8	2.8750	73.0250
21/32	0.6563	16.6688	1-13/32	1.4063	35.7188	2-5/32	2.1563	54.7688	2-29/32	2.9063	73.8188
11/16	0.6875	17.4625	1-7/16	1.4375	36.5125	2-3/16	2.1875	55.5625	2-15/16	2.9375	74.6125
23/32	0.7188	18.2563	1-15/32	1.4688	37.3063	2-7/32	2.2188	56.3563	2-31/32	2.9688	75.4063
3/4	0.7500	19.0500	1-1/2	1.5000	38.1000	2-1/4	2.2500	57.1500	3	3.0000	76.2000

## MILLIMETER TO INCHES

MM	INCHES	MM	INCHES	MM	INCHES
1	0.039	21	0.827	41	1.614
2	0.079	22	0.866	42	1.654
3	0.118	23	0.906	43	1.693
4	0.157	24	0.945	44	1.732
5	0.197	25	0.984	45	1.772
6	0.236	26	1.024	46	1.811
7	0.276	27	1.063	47	1.850
8	0.315	28	1.102	48	1.890
9	0.354	29	1.142	49	1.929
10	0.394	30	1.181	50	1.969
11	0.433	31	1.220	51	2.008
12	0.472	32	1.260	52	2.047
13	0.512	33	1.299	53	2.087
14	0.551	34	1.339	54	2.126
15	0.591	35	1.378	55	2.165
16	0.630	36	1.417	56	2.205
17	0.669	37	1.457	57	2.244
18	0.709	38	1.496	58	2.283
19	0.748	39	1.535	59	2.323
20	0.787	40	1.575	60	2.362


# TOLERANCE TABLE

SPECIFIED DIMENSION IN INCHES	METAL DIMENSIONS		SPACE DIMENSIONS				
	ALLOWABLE DEVIATION FROM SPECIFIED DIMENSION WHERE 75 PERCENT OR MORE OF THE DIMENSION IS METAL		ALLOWABLE DEVIATION FROM SPECIFIED DIMENSION WHERE MORE THAN 25 PERCENT OF THE DIMENSION IS SPACE				
	All except those covered by column 3	Wall thickness (4) completely (5) enclosing space 0.11 sq. in. and over (eccentricity)	At dimensioned points 0.250-0.624 inches from base of leg	At dimensioned points 0.625-1.249 Inches from base of leg	At dimensioned points 1.250-2.499 inches from base of leg	At dimensioned points 2.500-3.999 inches from base of leg	At dimensioned points 4.000-5.999 inches from base of leg
Col. 1	Col. 2	Col. 3	Col. 4	Col. 5	Col. 6	Col. 7	Col. 8
	Standard Tolerance	Standard Tolerance	Standard Tolerance	Standard Tolerance	Standard Tolerance	Standard Tolerance	Standard Tolerance
Up thru 0.124	0.006	+/- 15% Of Specified Dimension, +/- .090 Max +/- .025 Min.	0.010	0.012	..	..	..
0.125-0.249	0.007		0.012	0.014	0.016	..	..
0.250-0.499	0.008		0.014	0.016	0.018	0.020	..
0.500-0.749	0.009		0.016	0.018	0.020	0.022	..
0.750-0.999	0.010		0.018	0.020	0.022	0.025	0.030
1.000-1.499	0.012		0.021	0.023	0.026	0.030	0.035
1.500-1.999	0.014		0.024	0.026	0.031	0.036	0.042
2.000-3.999	0.024		0.034	0.038	0.048	0.057	0.068
4.000-5.999	0.034		0.044	0.050	0.064	0.078	0.094

- (1) These Standard Tolerances are applicable to the average profile. The extrusion conditions required to produce the wide variety of alloy-temper and profile combinations require close review between customer and producer to determine critical characteristics and tolerance capability, aggressive profile characteristics may require wider than standard tolerance and closer than precision tolerance may be feasible for other characteristics.
- (2) The tolerance applicable to a dimension composed of two or more component dimensions is the sum of the tolerances of the component dimensions if all of the component dimensions are indicated.
- (3) When a dimension tolerance is specified other than as an equal bilateral tolerance, the value of the standard tolerance is that which applies to the

mean of the maximum and minimum dimensions permissible under the tolerance for the dimension under consideration.

- (4) Where dimensions specified are outside and inside, rather than wall thickness itself, the allowable deviation (eccentricity) given in Column 3 applies to mean wall thickness. (Mean Wall thickness is the average of two wall thickness measurements taken at opposite sides of the void.)
- (5) In the case of Class 1 Hollow Profiles the standard wall thickness tolerance for extruded round tube is applicable. (A Class 1 Hollow Profile is one whose void is round and one inch or more in diameter and whose weight is equally distributed on opposite sides of two or more equally spaced axes.)



# NOTES





