
Pemko

Saddle Thresholds

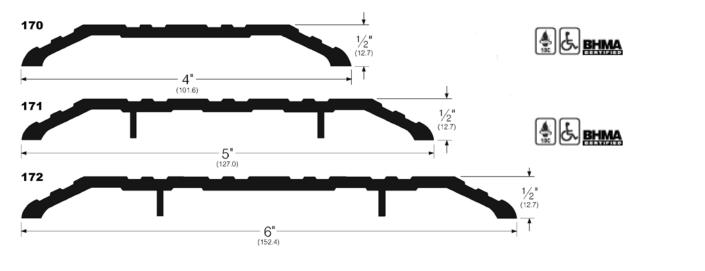


Stock	Stocked Product			
Finish K	ey A: Alumin	ium		
	D: Dark E	Bronze		
	SN: Satin	Nickel		
Model	Size	Finishes		
170	36", 48", 72"	Aluminum,		
170	36", 48", 72"	Dark Bronze		
171	36"	Aluminum, Dark Bronze, Satin Nickel		
171	48"	Aluminum, Dark Bronze		
171	72"	Aluminum, Dark Bronze, Satin Nickel		
172	36", 48", 72", 96"	Aluminum,		
172	36", 48", 72"	Dark Bronze		
172	36", 72"	Satin Nickel		

Stocked Product


Finish Key		Aluminum Dark Bronze Aluminum Dark Bronze
Model	Size	Finish
2005	36", 48", 72"	Aluminum (AV), Dark Bronze(DV
255	36", 48"	Aluminum, Dark Bronze

🌡 🕹 <u>BHMA</u>

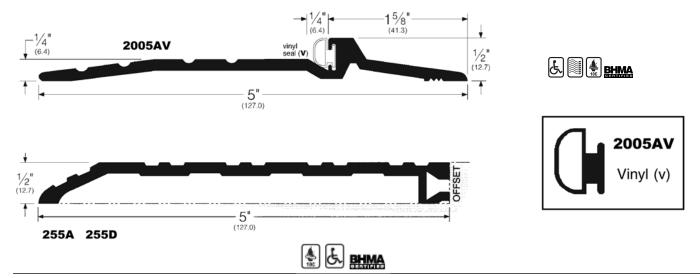


Pemko

Thresholds

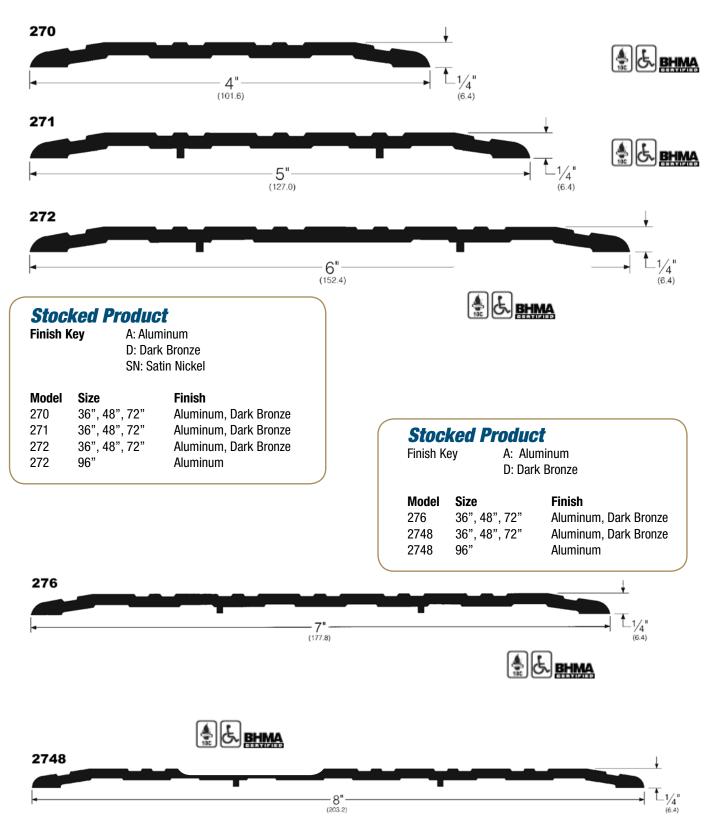


Pemko

Door Bottoms, Shoes & Sweeps

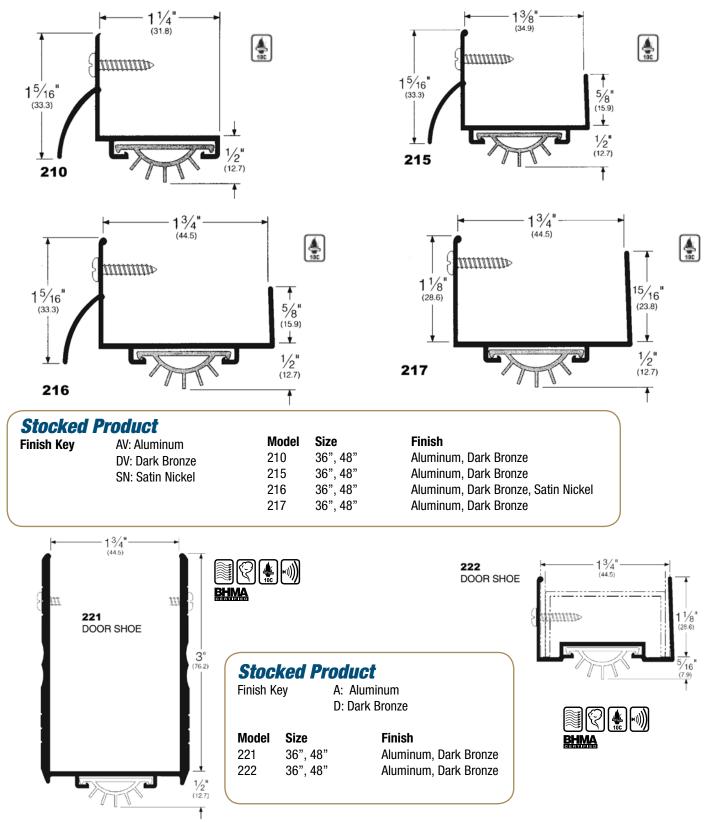

Pemko


Surface Sweeps

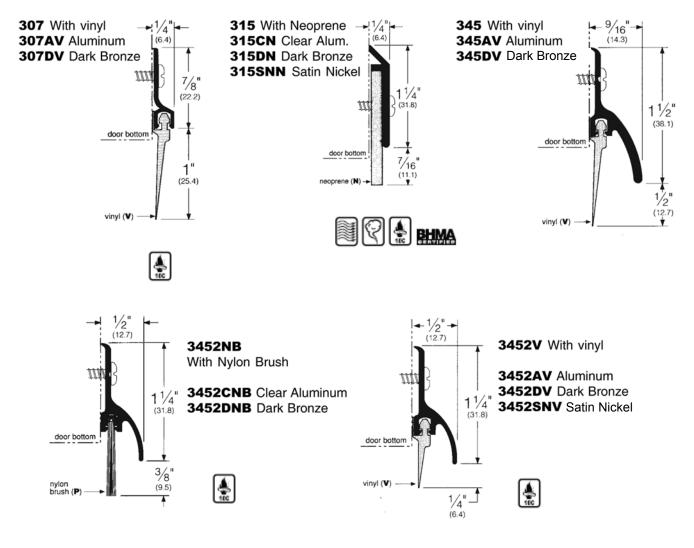

			181 NB		\$R
Stock	ked Product	ļ			BHMA
Model	Size	Finish		} 7/8" (22.2)	
307	36", 48"	Aluminum, Dark Bronze		(M)	
315	36", 48"	Aluminum, Dark Bronze, Satin Nickel (36" only)			
345	36", 48"	Aluminum, Dark Bronze		1"	
3452NB	36", 48"	Aluminum, Dark Bronze		(25.4)	
3452V	36", 48"	Aluminum, Dark Bronze, Satin Nickel		NV	
18100	36"	Aluminum, Dark Bronze		1000 <u>+</u>	


Pemko

Door Bottoms

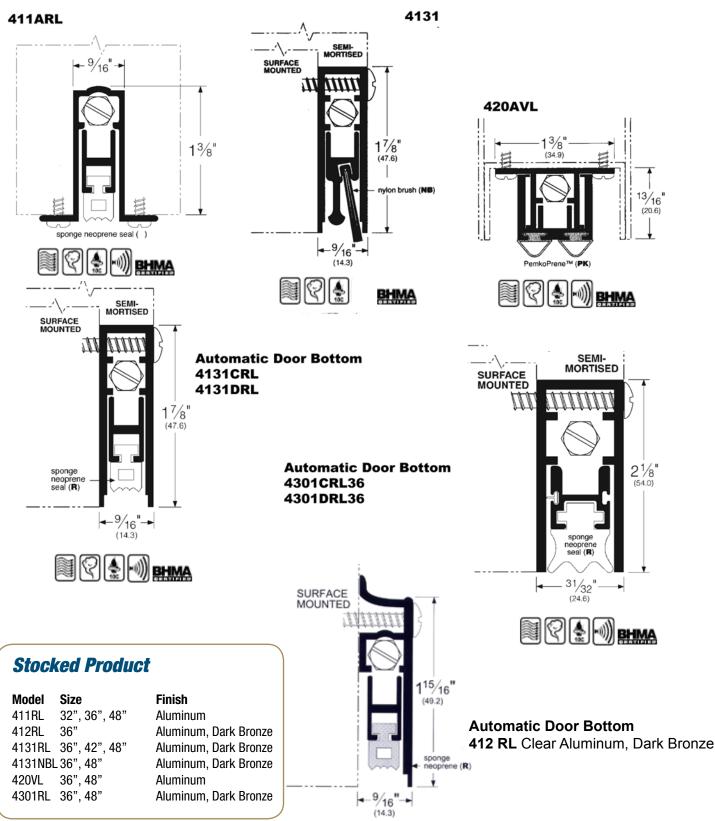


Pemko

Door Top Weatherseal & Sill Nosing

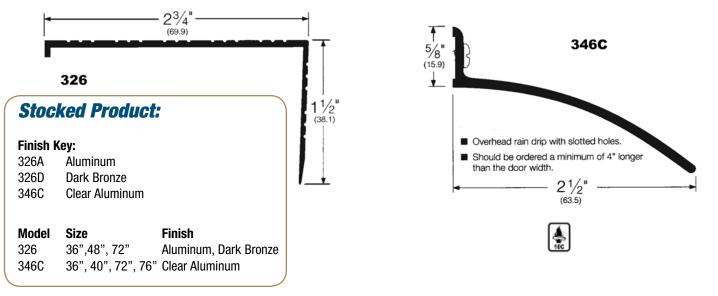


Split Astragals & Gasketing


2975 - With silicone



Stocked Product


Model	Size	Finish
297	36" X 84"	Aluminum, Dark Bronze
297	36" X 96"	Aluminum, Dark Bronze
297	72" X 84"	Aluminum, Dark Bronze
297	72" X 96"	Aluminum, Dark Bronze
297	84", 96"	Aluminum, Dark Bronze
303	36" X 84"	Aluminum, Dark Bronze, Satin Nickel
303	72" X 84"	Aluminum, Dark Bronze
303	84", 96" pair	Aluminum, Dark Bronze, Satin Nickel
303	120" pair	Aluminum, Dark Bronze
29326	96" pair	Aluminum, Dark Bronze



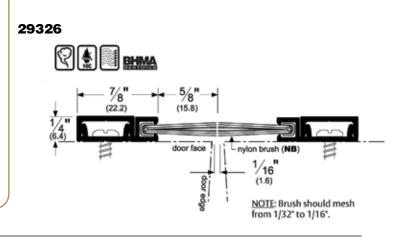

Pemko

Split Astragals & Gasketing

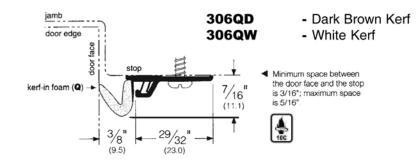

Stocked Product

Model	Size	Finish
306AQD	36" X 80"	Aluminum
306AQD	36" X 84"	Aluminum
306AQW	36" X 80"	Aluminum

"T" & Overlapping Astragal




Stocked Product


Model	Size	Finish
355CS/DS	84", 96", 108", 120"	Aluminum, Dark Bronze
355CV/DV	84"	Aluminum, Dark Bronze

Pemko

"T" & Overlapping Astragals & Brush Weatherstrip

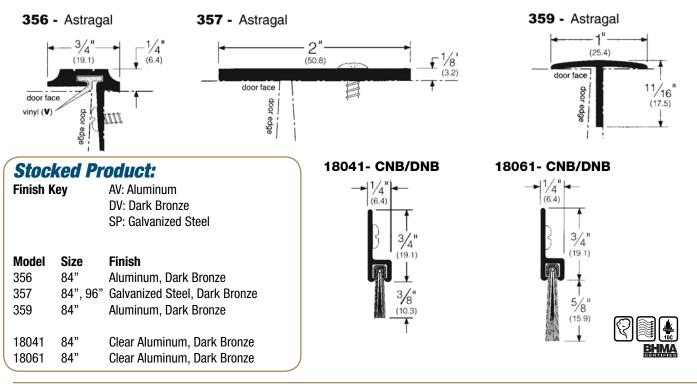

Locking Astragals Slimline Style

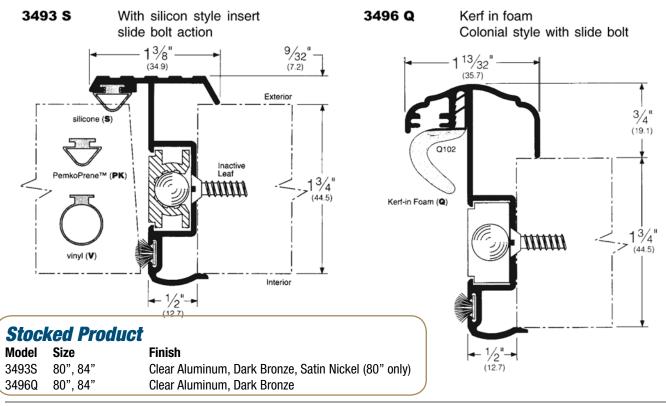


Pemko

Smoke Gasketing Pemko Prene



R



ି 🖓 🕵 😹 🕅

Minimum space between the door face and the stop is 1/16"; maximum space is 3/8". Positive Pressure rated up to 20 minutes.

PK55

³/16"

(4.8)

Compression Bulb

 $\frac{1}{2}$

(12.7)

• Designed for tighter frames.

to seal up to a 1/16" gap.

Stabilizer


Adhesive Backing

• Demonstrates extremely low closing force.

• Seal begins compressing at 3/16"; compresses

Flange






- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at 3/16"; com presses to seal up to a 1/16" gap.

Stocked Product

			Model	Size	Finish
Finish key:	BL	Black	PK52	18', 20'	Black, White
	D	Dark Bronze	PK33	17', 20', 25'	Black, White, Dark Bronze
	W	White	PK55	17', 20', 25'	Black, White, Dark Bronze

Gasketing & Edge Seal Products

S44



• Designed for tighter frames.



Stocked Product			
Finish H	(ey	D W	Dark Bronze White
Model S44	Size 17', 2	1', 25"	Finish White, Dark Bronze


• Seal begins compressing at 5/16"; compresses to seal up to a 1/16" gap.

• Demonstrates extremely low closing force.

Pemko

Locking Astragals Slimline Style

S88 - Silicone Seal S88 is air infiltration tested



S88D - Dark Brown Also available for special order in black, clear, tan, and white



SiliconSeal Adhesive Backed Fire / Smoke Gasketing


- Seals begin compressing at 3/16", and both can be compressed sufficiently to seal openings with 1/16" gaps, making door latching easy.
- Excellent resistance to compression set, particularly at elevated temperatures and for extended periods of times.
- Stays flexible between 70° F and 250° F with very high resistance to flex fatigue.
- Outstanding ozone resistance rating.
- Smoke tested by WYLE Laboratories in accordance with UL 1784-90; meets the requirements of NFPA 105 "Installation of Smoke Control Door Assemblies".

Gasketing - EDGE SEAL PRODUCTS

Edge Sealing Products for Positive Pressure Door System

- The new positive pressure building codes require stopping the passage of smoke, flames and hot gasses
- Pemko's intumescent and fire / smoke gasketing products have assisted numerous door and frame manufacturers in complying with the new stringent positive pressure standards UL10C and UBC7-2, Parts I and II, UBC7-2, Part I (for fire) and UBC7-2, Part II (for smoke).
- Many fire rated door assemblies (currently listed for UL10B) can now be listed for positive pressure (UL10C) by using Hot Smoke Seal in combination with SiliconSeal. Consult individual door and / or frame manufacturers for specific listing information.

Stocked Product				
Finish I	Key D W	Dark Bronze White		
Model S88	Size 17',20',21', 25'	Finish Dark Bronze, White		



HSS2000 -

SHMA

Hot Smoke Seal

Stocked Product

Model Size	Finish	
HSS2000	18',21',24'	White, Black
HSS2000 X S44	18',21',24'	Black
HSS2000 X S88	18',21',24'	Black
	HSS2000 HSS2000 X S44	HSS2000 18',21',24' HSS2000 X S44 18',21',24'

Pemko


S773 on Frame with Beveled Edge Door

- Pemko's S773 is a utility gasket that can be used in virtually any application requiring insulation from sound, smoke and weather conditions.
- Pemko's S773 can seal larger gaps than traditional seals and allows for warped doors and frames.
- · Pemko's S773 fins help to absorb the door's closing impact.
- Pemko's S773 mounted on the rabbet (on the latch side jamb) means more clearance and easier operation of latches and deadbolts.

The S773 is typically used as a perimeter gasket when sound transmission is an issue. It is an effective seal against heat loss and drafts. Common installation locations include hotel rooms, theaters, offices, etc. The S773 allows a low door closing force so it is particularly well suited to locations where ADA compliance is necessary. S773 can be effectively installed on both interior and exterior doors.


The S773 has an adhesive back and should only be installed on clean, dry and cured surfaces. On the "latch side" door jamb and the door header, the S773 should be installed on the frame rabbet with the tallest fin toward the door stop. On the "hinge side" the S773 should be installed on the door stop with the tallest fin toward the frame rabbet.

Fire Glazing Products



FG3000S45-14

FG30000S45 in 20 and 45 minute sidelite / borrowed lite / transom lite on hollow metal frame (screen)

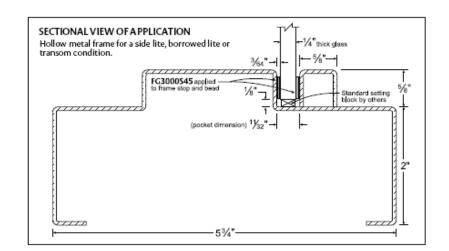

FG3000S45 has successfully passed 20 minutes (with hose stream) and 45 minutes on wood and metal doors with vision lites installed.


- Maximum wood door size with FG3000S45 48" x 96" single and/or pairs approved
- Maximum hollow metal door size with FG3000S45 48" x 120" single and/or pairs approved

Note: verify all applications with your door and/or frame manufacturer

Stocked Product

FG3000S

45 Minute X 14 Foot



Stocked Product

17', 20', 25', Dark brown

ANSI NUMBER: R0E154

³/_{0,0} − ½^{*} − (0,2) (0,2) Backing


 Triple-fin design effectively blocks light and sound from infiltrating a room.
Product designed as hospitality gasketing (see more hospitality products in the Hospitality Products.

Pemko


Continuous Hinges

Full Mortise

Standard



Full Surface



CFS83 - Full surface units are designed primarily for retrofit work and are applied to the exposed surface of the door & frame

Stocked Product

Model	Size	Finish
CFM83	83"	Clear Anodized Aluminum
CFS83	83"	Clear Anodized Aluminum

BHMA