



STUDIO SUPPLIER DIVISION
@ THE KITCHEN STORE · EST. 1965

CARDIOLOGY

PRODUCTION & FACILITIES SOURCING GUIDE

Commercial Doors & Frames

Architectural wood, prestained, embossed, and hollow metal doors — paired with commercial frame systems from Timely and Steelcraft. Stocked for film & TV production and facilities builds, with fast studio turnaround.

Studio Phone (310) 839-5215

6322 W. Slauson Ave., Culver City, CA 90230

studiosupplier.com · info@studiosupplier.com





LIGHT DUTY / RESIDENTIAL

- 01** **Light Duty Wood Doors** 3 embossed & 3 unfinished veneer finishes
- 02** **Light Duty Steel Doors & Louvers** Residential & light commercial utility louver doors

WOOD DOORS

- 03** **ColledgeGuard Prestained Doors** Prefinished HDF, ready to hang
- 04** **Pre-Finished Stock Doors** Clear pre-finished species, ready to ship
- 05** **Architectural Wood Doors** Unfinished veneer, stain-grade

COMMERCIAL STEEL DOORS

- 06** **Hollow Metal Commercial Doors** Steelcraft L-Series, all duty levels

COMMERCIAL FRAMES

- 07** **Timely Frames** Knock-down steel frames, sizes & color options
- 08** **Western Integrated** Made-to-order aluminum frames, all series & finishes
- 09** **Steelcraft Frames** Masonry & drywall hollow metal frames, all sizes

DOOR ACCESSORIES

- 10** **Vision Lites & Louvers** Glazed & ventilated door inserts

REFERENCE

- 11** **Door Examples** Recent installs with matching frame & hardware
- 12** **Hollow Metal Cross-Reference** Hinge-prep dimensions across manufacturers
- 13** **Prehung Order Worksheet** Fillable spec sheet for prehung quotes & orders

How to order: Pricing runs by species, finish, size, and fire rating, and current stock & lead times aren't shown online — call the Studio Line at (310) 839-5215 to confirm before you order (scanning a QR code in this booklet opens the product page, not live availability). Most items in this booklet ship the next business day; some run 4–5 business days, and a few special-order items take longer — your rep will confirm the lead time when you call. Commercial hardware (locks, closers, exit devices & plates) is covered in a separate hardware catalog — ask your rep.





LIGHT DUTY · 01

Light Duty Wood Doors

COMMERCIAL / RESIDENTIAL

Light Duty Commercial / Residential Doors

A budget-friendly light-duty door line for light commercial and residential openings — three embossed hardboard facings and three unfinished veneer species on the same core — paired with Timely knock-down steel frames.

Embossed Hardboard



Prime Coat

EP6 EMBOSSED · PAINTABLE



Legacy Oak


EMBOSSED WOODGRAIN



Legacy Walnut


EMBOSSED WOODGRAIN

Unfinished Veneer

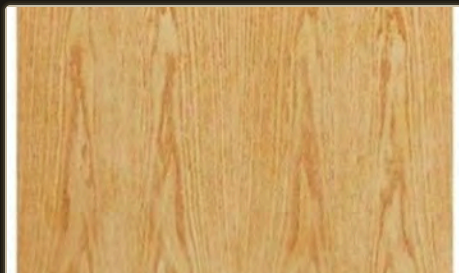

Red Oak

UNFINISHED VENEER

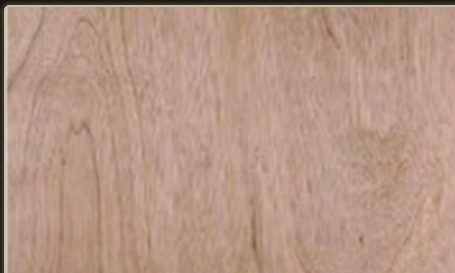

Lauan

UNFINISHED VENEER



Natural Birch †

UNFINISHED VENEER

† Natural Birch & Smooth Prime Coat are also stocked pre-fit to Timely knock-down frames in 3/0×6/8 & 3/0×7/0.

LIGHT DUTY · STOCKED SIZES ONLY

Available Sizes by Finish (W × H)

FINISH	6/8 HEIGHT	7/0 HEIGHT	8/0 HEIGHT
Smooth Prime Coat †	Available in all sizes		
Embossed Prime Coat	2/4, 2/6, 2/8, 3/0	—	—
Legacy Oak / Legacy Walnut	2/0, 2/4, 2/6, 2/8, 3/0	3/0, 3/6, 4/0	3/0
Lauan	1/6, 2/0, 2/4, 2/6, 2/8, 3/0	—	—
Red Oak	2/0, 2/4, 2/6, 2/8, 3/0	2/6, 2/8, 3/0	3/0
Natural Birch	2/0, 2/4, 2/6, 2/8, 2/10, 3/0	2/0, 2/4, 2/6, 2/8, 3/0, 3/6, 4/0	2/6, 2/8, 3/0

Sizes shown are current stocked availability only — other width/height combinations are not stocked for these finishes.

Ordering: light-duty doors and Timely frames are sold separately and matched to your opening size — call the Studio Line at **(310) 839-5215**. Full Timely frame sizes & color options are on the Timely Frames page.






LIGHT DUTY · 02

Light Duty Steel Doors & Louvers

COMMERCIAL / RESIDENTIAL

Residential Metal Louver Utility Doors

24-gauge galvanized steel louver doors, built for multi-family balcony storage closets and light commercial utility openings. Proudly crafted in the USA.

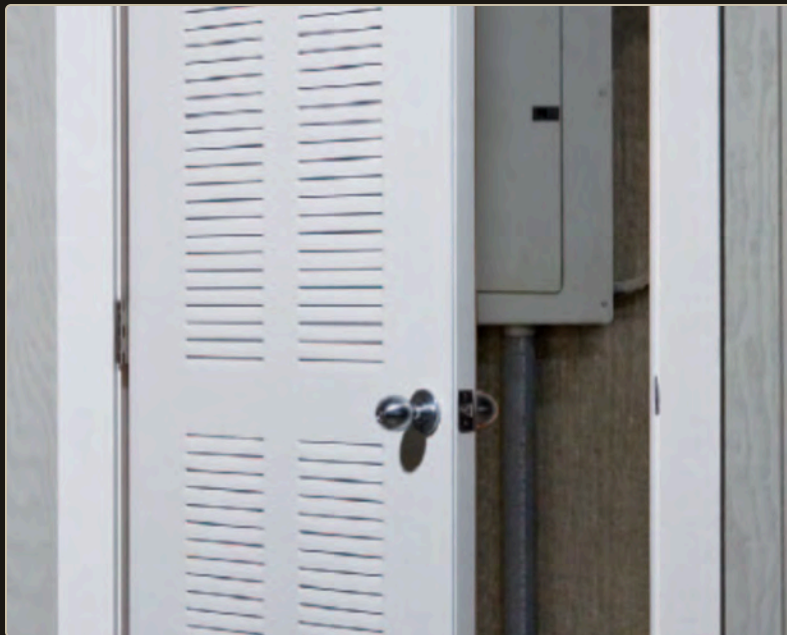


Material	24-gauge galvanized steel
Louvers	Integral pressed metal, both sides
Core	2 lb. foam, internal bracing
Stiles	Softwood / pine
Finish	Pre-primed
Lock prep	2-1/8"×2-3/8" single bore (or no-bore)
Bottom rail	11-11/16", kerfed for door sweep
Thickness	1-3/8" or 1-3/4"
Heights	6/8, 8/0
Widths	2/0 – 3/0
Fire rating	Not fire rated

20-MINUTE FIRE RATED · 6/8 HEIGHT ONLY

Flush & 6-Panel Steel Doors

CONFIGURATION	SKIN	SIZES (6/8 HEIGHT)
Flush	24-gauge steel	2/6, 2/8, 3/0
6-Panel	24-gauge steel	2/6, 2/8, 3/0

Metal fire label & single-bore 340 hinge prep included · 2/8 & 3/0 also available double bore (2-1/8" bore, 2-3/8" backset, 5-1/2" O.C.).

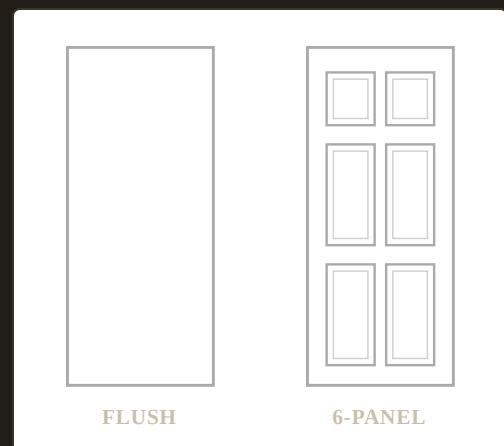




WOOD DOORS • 03

ColledgeGuard Prestained Doors


PREFINISHED HDF

ColledgeGuard Prestained Doors

A prefinished HDF door line ready to hang as-is — five coordinated finishes with a color-matched door edge.

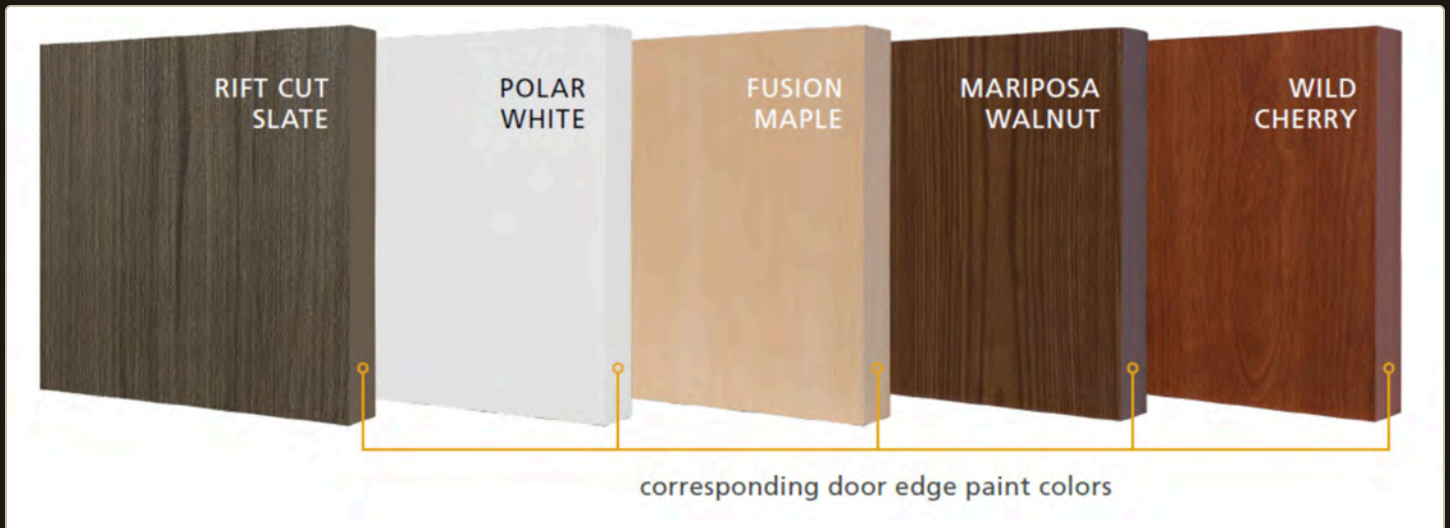

Rift Cut Slate, Polar White, Fusion Maple, Mariposa Walnut & Wild Cherry — each with a color-coordinated prepainted door edge. CARB II compliant, FSC & SCS recognized.

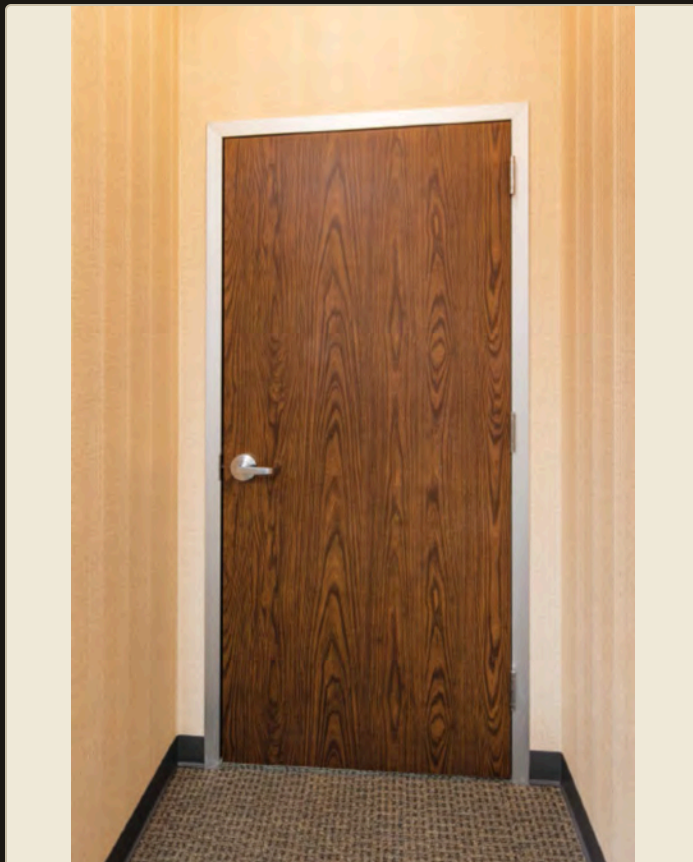

STOCK SIZES (W × H × THICK)

3/0×6/8×1-3/4"

3/0×8/0×1-3/4"

3/0×7/0×1-3/4"

CONSTRUCTION

Facing Prestained HDF, factory finished

Core Solid, hot-pressed

Edge Color-matched prepainted edge

WHY COLLEDGE GUARD

Factory-applied finish eliminates field staining and sealing — consistent color, faster install, fewer trades on site.

Ready to hang as-is — no field finishing, staining, or sealing required. Doors, frames, and hardware are sold and ordered separately.





WOOD DOORS • 04

Pre-Finished Stock Doors


IN STOCK • READY TO SHIP

Pre-Finished Stock Doors

Clear pre-finished species, stocked and ready to ship as-is — no field finishing required.




2-ply construction, 1/42" face veneer, Book/Running Match A-Grade. Meets WDMA I.S. 1-A · WIC Section 12 · AWI Section 1300 "Premium"/"Custom" grade. **Stock sizes:** 3/0×7/0, 3/0×8/0, 3/0×9/0 × 1-3/4".

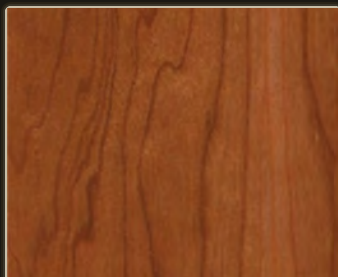

Cherry
PRE-FINISHED



Maple
PRE-FINISHED

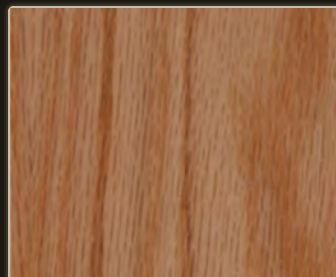

Red Oak
PRE-FINISHED



Birch
PRE-FINISHED













WOOD DOORS • 05

Architectural Wood Doors

UNFINISHED VENEER

Architectural Wood Doors — Unfinished Veneer

Stain-grade flush doors in eight veneer species, built to WDMA / WIC / AWI standards for architectural and commercial openings.

			
Cherry PLAIN SLICED	Mahogany PLAIN SLICED	Walnut PLAIN SLICED	Red Oak † PLAIN SLICED
			
Maple † PLAIN SLICED	White Birch † ROTARY	White Oak † RIFT CUT	White Oak PLAIN SLICED

† Plain Sliced Red Oak, Plain Sliced Maple, Rift Cut White Oak & Rotary White Birch are also stocked pre-fit to Timely knock-down frames in 3/0×7/0, 8/0 & 9/0.



BEVELED 3/16" • SOLID CORE • TRIMMABLE • 20-MIN. FIRE RATED

Stock Sizes (W × H × Thick)

3/0×6/8×1-3/4"	3/0×8/0×1-3/4"
3/0×7/0×1-3/4"	3/0×9/0×1-3/4"
4/0×7/0×1-3/4" — White Birch & Red Oak only	

3/0×6/8 doors may ship as a 3/0×7/0 door trimmed down in the field — the 7/0 door has a 6" bottom rail, so it can be trimmed to 6/8.

GRADE & COMPLIANCE

Construction & Standards

Construction	5-ply solid core, hot-pressed
Standards	WDMA I.S. 1-A • WIC Sec. 12 • AWI Sec. 1300
Grade	Custom / Premium, stain grade

Fire-label options: B-label 20-minute stamp, 20-minute Timely metal label (345/445-161 frame), or 90-minute stamp — available on request for rated openings.





STEEL DOORS • 06

Hollow Metal Commercial Doors

STEELCRAFT L-SERIES

Steelcraft L-Series Hollow Metal Doors

Full-gauge commercial steel doors built to ANSI A250.8 / SDI 100, in four duty levels to match any opening from a back-of-house corridor to a maximum-duty entrance.



MODEL	GAUGE & DUTY	AVAILABILITY
L20	20-gauge · Standard Duty	Special Order
L18	18-gauge · Heavy Duty	Stocked
L16	16-gauge · Extra Heavy Duty	Stocked
L14	14-gauge · Maximum Duty	Special Order

Steelcraft hollow metal door, field installed

CORE OPTIONS

Honeycomb, Polystyrene, Polyurethane

- Edge construction: visible, filled, or welded seam
- Fire rated to ASTM E152 / UL-10B and UBC 7-2 / UL-10C
- Universal hinge preparations · 14-gauge inverted top & bottom channels · beveled hinge & lock edges · recessed Dezigner glass trim · baked-on rust-inhibiting primer
- ANSI A250.8 / SDI 100 Levels 1–4 — max size charts on file for every gauge & duty level. Ask your rep to match a door schedule to your opening.

ALSO AVAILABLE

Falcon SZ18 Series


- Square hinge & lock edges
- Honeycomb core, cold-rolled steel (CRS) face sheets
- 90-minute Warnock Hersey fire label standard (3-hour optional)
- Buy American Act compliant






Timely Knock-Down Steel Frames


18-gauge steel frames, shop-primed and field-assembled with no welding — two door-thickness families, four factory finishes.

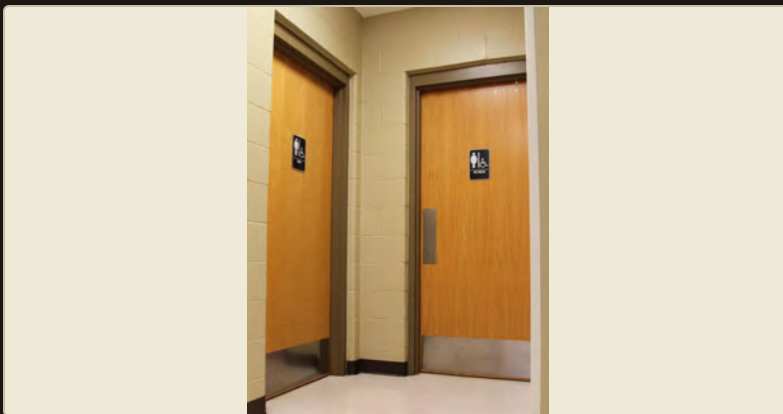


FINISHES

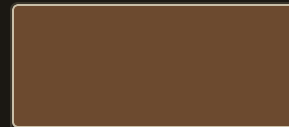


Browntone

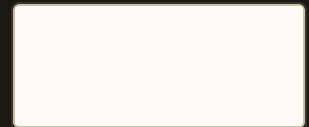

Western White



Alumatone



Black

ADA restroom door in a Timely knock-down steel frame, field installed

LIGHT DUTY · TA-1 STRIKE INCLUDED

1-3/8" Frames

FRAME CALL-OUT	WALL SIZE	WIDTHS STOCKED
45S-235 (3/0 only)	4-1/2"–4-5/8"	3/0
47S-235	4-3/4"–4-7/8"	2/0, 3/0 (Browntone) · 2/0, 2/6, 2/8, 2/10, 3/0 (Western White)
47S-335	4-3/4"–4-7/8"	2/0, 3/0 (Browntone) · 2/0, 2/6, 2/8, 2/10, 3/0 (Western White)

Height 6/8 only · 6/8 frames are reversible · TA-8 casing & TA-1 zincrome strike included · Browntone & Western White.

90-MINUTE FIRE LABEL

1-3/4" Frames

FRAME CALL-OUT	WALL SIZE	HEIGHTS STOCKED
36S-340	3-5/8"–3-3/4"	6/8, 7/0
45S-340	4-1/2"–4-5/8"	6/8, 7/0
47S-340	4-3/4"–4-7/8"	6/8, 7/0, 8/0+
53S-340	5-1/4"–5-3/8"	6/8, 7/0, 8/0+
67C-340	6-3/4"–6-7/8"	6/8, 7/0
72C-340	7-1/8"–7-1/4"	6/8, 7/0

Width 3/0 standard (2/0 & 2/10 also stocked in #47S) · TA-8 casing & TA-1 zincrome strike included · #47S stocked reversible and handed — specify handing · Browntone, Western White, Alumatone & Black (Alumatone/Black in #47S-340 only).

18-GA. · 90-MIN. FIRE

C-Series Frames

47C	7/0, 8/0, 9/0
53C	7/0, 8/0, 9/0

Width 3/0 · TA-8 casing, ASA strike prep (no strike) · RH/LH · Black & Alumatone, both stocking.

DOUBLE DOOR

Paired Units

Frame call-out	47S-640
Wall size	4-3/4"–4-7/8"
Widths	4/0, 5/0, 6/0
Heights	6/8, 7/0

ODD WALL THICKNESS

Adjustable Frames

54A-340	3-3/4"–5-1/2"
73A-340	5-5/8"–7-3/8"
91A-340	7-1/2"–9-1/8"

Width 3/0, 6/8 & 7/0 · Browntone & Western White only.

Pre-fit doors: select Legacy Oak, Legacy Walnut & Natural Birch light-duty doors ship pre-fit to Timely 340/161 frame prep — see the Light Duty Wood Doors page. Call the Studio Line at **(310) 839-5215** for current stock.





Western Integrated Aluminum Frames

Made-to-order aluminum frames for storefront & interior glazed openings — factory-mortised for hinges & strike plates, with concealed edge fastening and snap-on trim that keeps the frame from twisting in the wall.



FINISHES

Clear Anodize	Bronze Anodize	Black Anodize
White Enamel	Black Enamel	Custom Color Match

Western Integrated aluminum frame sections, storefront & interior glazing

STANDARD · MADE TO ORDER
Series 300 Frames

SERIES	THROAT SIZE	FINISHES
315	3-3/4"	Clear, Bronze & Black Anodized
316	3-7/8"	Clear Anodized
318	4-7/8"	Clear, Bronze & Black Anodized
319	5"	Clear, Bronze & Black Anodized · 1/2" glass glazing available
320	5-1/4"	Clear, Bronze & Black Anodized
321	5-1/2"	Clear Anodized
326	6-1/4"	Clear & Black Anodized
327	7-1/4"	Clear & Black Anodized

Any Series 300 profile can also be finished in baked enamel (white, black, or custom color match) in place of anodize.

NON-STANDARD WALL CONDITIONS
Series 400 Frames

Custom-sized to order for any throat from 3" through 9-1/2" — same profile, trim & install as Series 300, fabricated to your specified wall condition.

90-MINUTE POSITIVE PRESSURE
Series 700 Frames

700	3-3/4"–5-1/2" throat
701	5-1/2"–8-3/8" throat
706	8-1/2"–10-1/8" throat

Series 700 fire-rated: max assembly 4/0×9/0 single swing or 8/0×9/0 standard pair, with Pemko smoke seal & intumescent supplied by Western Integrated. Hinges per NFPA 80 (no pivots) · cylindrical or mortise latches, 5" max backset · mortise or surface vertical rod exit devices · surface-mounted closers · astragal required on pairs · listed Category A/B steel or wood doors only.





Steelcraft Hollow Metal Frames

16-gauge heavy duty steel frames for masonry (“F” Series) and drywall (“K” Series) construction — one factory finish, field-paintable to match.

MASONRY · WELDED OR KNOCKED-DOWN “F” Series Frames

Gauge	16-gauge cold rolled steel
Hinge prep	4-1/2" universal template, .134" & .180"
Strike prep	4-7/8" ASA
Rating	Up to 3-hour (welded); knocked-down frames up to 90-min
Rough opening	Width +4-1/2", height +2-1/4" (new stud) · width +4-1/4", height +2-1/8" (existing wall)
Frame sizes	3-3/4"–8-1/2" throat, 9 profiles (F16 series)
Single widths	2/0, 2/4, 2/6, 2/8, 2/10, 3/0, 3/6, 4/0 · heights 6/8, 7/0, 8/0
Paired widths	4/0, 5/0, 6/0, 8/0 · heights 6/8, 7/0, 8/0

DRYWALL · KNOCKED-DOWN ONLY “K” Series Frames

Gauge	16-gauge cold rolled steel
Hinge prep	4-1/2" template, .134" thickness
Strike prep	4-7/8" ASA
Anchors	Compression & sill anchors
Rating	Up to 1.5-hour (90-min maximum on KD frames)
Rough opening	Width +2", height +1"
Frame sizes	3-3/4"–7-1/4" throat, 8 profiles (K16 series)
Single widths	2/0, 2/4, 2/6, 2/8, 2/10, 3/0, 3/6, 4/0 · heights 6/8, 7/0, 8/0
Paired widths	4/0, 5/0, 6/0, 8/0 · heights 6/8, 7/0, 8/0



Finish: both series ship in a single baked-on beige rust-inhibiting primer — the standard (and only) factory finish, ready for field painting to match any color scheme.

Knock-down assembly: frame jamb, head, and wall anchor ship unassembled and are fitted on site — no welding required for KD installations.





ACCESSORIES • 10

Vision Lites & Louvers

DOOR INSERTS

Vision Lite & Louver Inserts

Glazed vision lites and ventilated louver inserts that fit any door in this catalog — factory-cut to the opening and shipped complete, or shipped loose for a fast turnaround.

GLAZED

Vision Lite Kits

SIZES

6×27 7×22 8×32 12×12 18×18 18×24
18×32 18×56 18×66 24×24 24×30 24×32
24×36 24×56 24×66

GLASS

Clear Tempered Wire

Gray primer or bronze enamel frame • factory-cut, ships complete — or ships loose (not cut into the door) for fast, next-day delivery.



VENTILATED

Louver Inserts

SIZES

12×12 16×10 18×12 18×56 18×66 24×12
24×18 24×24 24×56 24×66

Gray primer or bronze finish • fits hollow or solid core doors • common for mechanical & utility rooms.

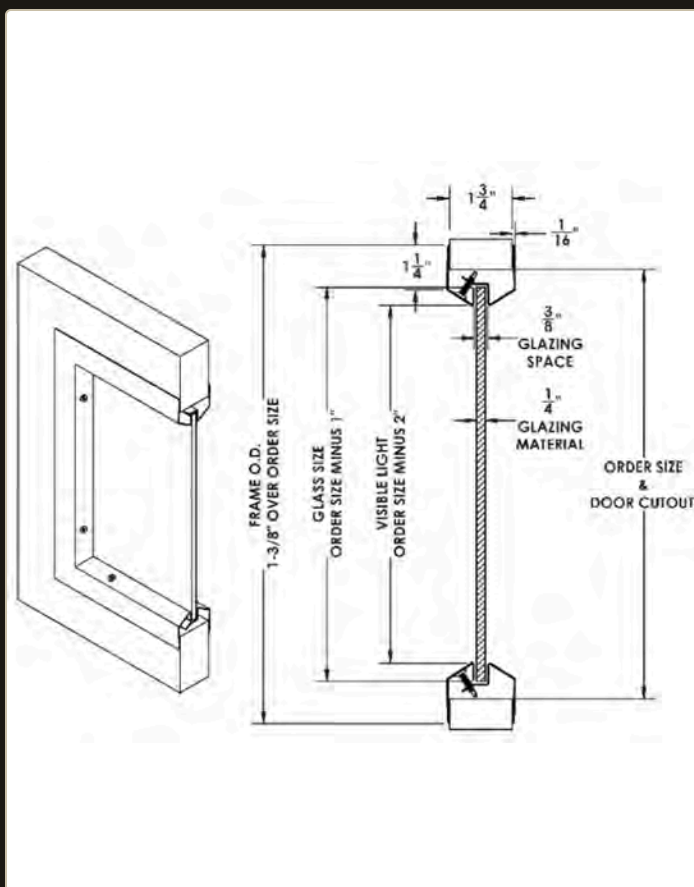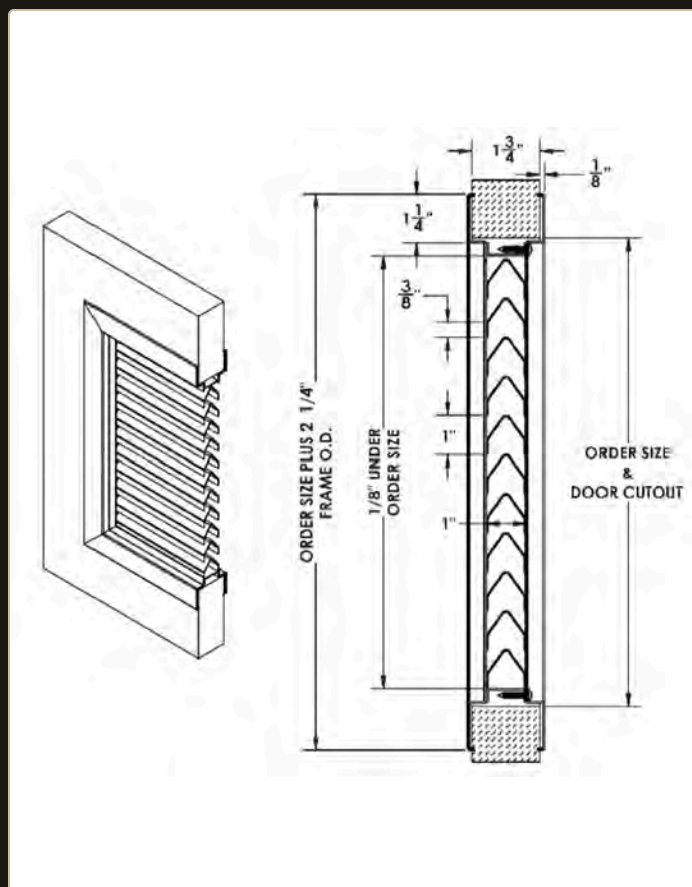

Order size = door cutout size for both vision lites & louvers. Ask your rep to confirm exact cutout before ordering.





A Few Examples

A handful of doors from this catalog in the field, with the frame & hardware that complete each opening — use these as an ordering reference.



Hospital Corridor — solid core wood door with vision lite, hallway & patient room opening.

Door: 3/6×7/0×1-3/4" SCHB

Frame: Steelcraft hollow metal

Hardware: closer #DC161H-AL · vision lite 24×24 clear tempered · exit device w/vertical rod #EDVR531-AL · kick plate #KPN123432D · (3) 4×4 hinges #DH179426D




Double Door Opening — paired solid core wood doors, commercial corridor.

Door: 3/0×7/0×1-3/4" SC Natural Birch (pair)

Frame: Steelcraft hollow metal

Hardware: closer (hold-open) #DC161H-AL · vision lite 7×22 clear tempered · exit device w/top & bottom rod #EDVR531AL · exit trim lever · kick plate 8×34 · (3) 4-1/2×4-1/2 hinges

Adjacent single door: lever Sparta #LDV10-26D · deadbolt #9TAHDB25126D

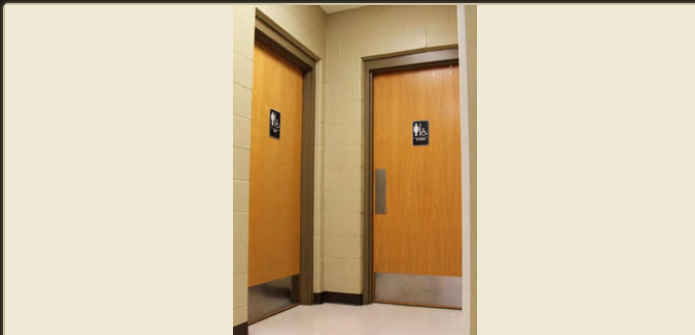

Restroom — ADA — single-user restroom, solid core door.

Door: 3/0×6/8×1-3/4" SC Cherry, unfinished

Frame: Timely knock-down steel

Hardware: ADA restroom sign #HS96 · push plate 4×16 #PPN4016 · kick plate 10×34 #KPN1034 · (3) 4×4 hinges #DH179426D



Office Suite — pre-finished Maple doors.

Door: 3/0×7/0×1-3/4" SC, pre-finished Maple

Frame: Western Integrated aluminum

Hardware: passage latch (lever) Saturn #LDV10-26D · kick-down door holder #SH1235BR-26D · (3) 4×4 hinges

Note: vision lite is a direct-glaze lite set by the installer in the field — not a factory hardware item.

Doors, frames & hardware shown above are sold and ordered separately — nothing ships pre-bundled. Call the Studio Line at **(310) 839-5215** for current stock, lead times, and a matching set. Scan the QR code below for our full samples list.





Hollow Metal Door & Frame Cross-Reference

Hinge and strike centerline locations across major hollow metal manufacturers — use this to match hinge/strike prep when the original door or frame brand isn't known. Dimensions are manufacturer-published guideline data; field-verify before fabrication or ordering.

TOP OF FRAME TO TOP OF HINGE

FRAME	3/0×6/8				3/0×7/0				3/0×8/0				
	A	B	C	BORE ♦	A	B	C	BORE ♦	A	B	C	D	BORE ♦
Amweld	7-1/2"	37-7/16"	67-3/8"	40-5/16"	7-1/2"	39-7/16"	71-3/8"	40-5/16"	7-1/2"	32-13/16"	58-1/8"	83-7/16"	40-5/16"
Ceco	6-3/4"	37-3/4"	68-3/4"	41-13/16"	6-3/4"	39-3/4"	72-3/4"	41-13/16"	6-3/4"	32-3/4"	58-3/4"	84-3/4"	41-13/16"
Curries	5"	35-1/4"	65-1/2"	40"	5"	37-1/4"	69-1/2"	40"	5"	30-1/2"	56"	81-1/2"	40"
DKS	7-1/2"	37-7/16"	67-3/8"	40-5/16"	7-1/2"	39-7/16"	71-3/8"	40-5/16"	7-1/2"	32-13/16"	58-1/8"	83-7/16"	40-5/16"
Mesker	5"	35-1/4"	65-1/2"	40-5/16"	5"	37-1/4"	69-1/2"	40-5/16"	5"	30-1/2"	56"	81-1/2"	40-5/16"
Pioneer	5"	35-1/4"	65-1/2"	38"	5"	37-1/4"	69-1/2"	38"	5"	30-1/2"	56"	81-1/2"	38"
Republic	7-1/2"	37-7/16"	67-3/8"	40-5/16"	9-1/2"	39-7/16"	69-3/8"	40-5/16"	5"	30-1/2"	56"	81-1/2"	40-5/16"
Steelcraft	7-1/2"	37-7/16"	67-3/8"	40-5/16"	7-1/2"	39-7/16"	71-3/8"	40-5/16"	7-1/2"	32-51/64"	58-3/32"	83-25/64"	40-5/16"

♦ Centerline of strike height from bottom of frame.

TOP OF DOOR TO TOP OF HINGE

DOOR	3/0×6/8				3/0×7/0				3/0×8/0				
	A	B	C	BORE •	A	B	C	BORE •	A	B	C	D	BORE •
Amweld	7-3/8"	37-5/16"	67-1/4"	39-9/16"	7-3/8"	39-5/16"	71-1/4"	39-9/16"	7-3/8"	32-11/16"	58"	83-5/16"	39-9/16"
Ceco	6-5/8"	37-5/8"	68-5/8"	41-1/16"	6-5/8"	39-5/8"	72-5/8"	41-1/16"	6-5/8"	32-5/8"	58-5/8"	84-5/8"	41-1/16"
Curries	4-7/8"	35-1/8"	65-3/8"	39-1/4"	4-7/8"	37-1/8"	69-3/8"	39-1/4"	4-7/8"	30-3/8"	55-7/8"	81-3/8"	39-1/4"
DKS	7-3/8"	37-5/16"	67-1/4"	39-9/16"	7-3/8"	39-5/16"	71-1/4"	39-9/16"	7-3/8"	32-11/16"	58"	83-5/16"	39-9/16"
Mesker	4-7/8"	35-1/8"	65-3/8"	39-9/16"	4-7/8"	37-1/8"	69-3/8"	39-9/16"	4-7/8"	30-3/8"	55-7/8"	81-3/8"	39-9/16"
Pioneer	4-7/8"	35-1/8"	65-3/8"	37-1/4"	4-7/8"	37-1/8"	69-3/8"	37-1/4"	4-7/8"	30-3/8"	55-7/8"	81-3/8"	37-1/4"
Republic	7-3/8"	37-5/16"	67-1/4"	39-9/16"	9-3/8"	37-1/8"	69-1/4"	39-9/16"	4-7/8"	30-3/8"	55-7/8"	81-3/8"	39-9/16"
Steelcraft	7-3/8"	37-5/16"	67-1/4"	39-9/16"	7-3/8"	39-5/16"	71-1/4"	39-9/16"	7-3/8"	32-43/64"	57-31/32"	83-17/64"	39-9/16"

• Measured from bottom of door up to center of backset (standard cylindrical).

Timely & Western Integrated — Door Prep (separate hinge systems, not mortise-template hollow metal)

TIMELY KNOCK-DOWN FRAMES

DOOR	HINGES	TOP	MID 1	MID 2	BOTTOM	STRIKE
6/8"	1pr 3.5"	8-1/4"	—	—	68-1/4"	40"
6/8"	1.5pr 3.5"	8-1/4"	38-1/4"	—	68-1/4"	40"
6/8"	1.5pr 4"	8-1/4"	38"	—	67-3/4"	40"
6/8"	1.5pr 4.5"	8-1/4"	37-3/4"	—	67-1/4"	40"
7/0"	1pr 3.5"	8-1/4"	—	—	72-1/4"	44"
7/0"	1.5pr 3.5"	8-1/4"	40-1/4"	—	72-1/4"	44"
7/0"	1.5pr 4"	8-1/4"	40"	—	71-3/4"	44"
7/0"	1.5pr 4.5"	8-1/4"	39-3/4"	—	71-1/4"	44"
8/0"	2pr 4"	8-1/4"	33-1/4"	58-3/4"	83-3/4"	56"
8/0"	2pr 4.5"	8-1/4"	33-1/4"	58-1/4"	83-1/4"	56"

"Hinges" = pairs & hinge height (e.g. 1.5pr 4" = 1-1/2 pair of 4" hinges). Top of door down to top of each hinge; strike to centerline. Source: Timely Prefitting Instructions.

WESTERN INTEGRATED ALUMINUM FRAMES

JAMB	HINGES	TOP	MID 1	MID 2	BOTTOM	STRIKE
6/8"	1-1/2 Pair	5"	35-1/4"	—	65-1/2"	42"
6/8"	2 Pair	5"	25-1/4"	45-1/2"	65-3/4"	42"
7/0"	1-1/2 Pair	5"	37-1/4"	—	69-1/2"	46"
7/0"	2 Pair	5"	26-1/2"	48"	69-1/2"	46"
8/0"	1-1/2 Pair	5"	43-1/4"	—	81-1/2"	58"
8/0"	2 Pair	5"	30-1/2"	56"	81-1/2"	58"

4-1/2×4-1/2" hinges unless noted; positions by jamb height. Source: WI-M 208.

Source: manufacturer-published data, current as of this printing. Studio Supplier Division is not responsible for field variances — verify critical dimensions before fabrication or ordering. Call the Studio Line at (310) 839-5215 with questions.





@ The Kitchen Store · Est. 1965

Quote

PREHUNG SPECIFICATION SHEET

Customer _____
Date _____
Customer PO # _____
Customer Signature _____

[illegible]



Studio Supplier Division · @ The Kitchen Store · Est. 1965

Ready When Your Production Is.

Doors, frames & commercial steel — in stock for film & TV builds. Call the Studio Line for pricing, availability, and rush pulls.

(310) 839-5215

6322 W. Slauson Ave., Culver City, CA 90230 · studiosupplier.com

