

# VCT II

Introducing 12 new accent colors




# VCT II

Tarkett VCT II combines trusted performance with fresh design possibilities for today's busiest spaces. The newly expanded palette features timeless neutrals alongside bold accents—perfect for creative layouts, intuitive wayfinding, or showcasing school spirit. Made with up to 85% limestone, this resilient flooring delivers lasting durability and an exceptional return on investment, a complete solution from every angle.

**Wall base coordinates**  
 \* We've identified Color Foundations® neutrals in the following way:  
**WB** (Warm Beige), **CB** (Cool Beige), **WG** (Warm Grey), **CG** (Cool Grey), **B** (Black), **W** (White).

000 Color Name  
 00 Coordinating Color

*Suggested colors for finishing borders (wall base). Coordinated Johnsonite® accessories are a printed approximation. Please refer to the Color Guide for accurate color representation.*

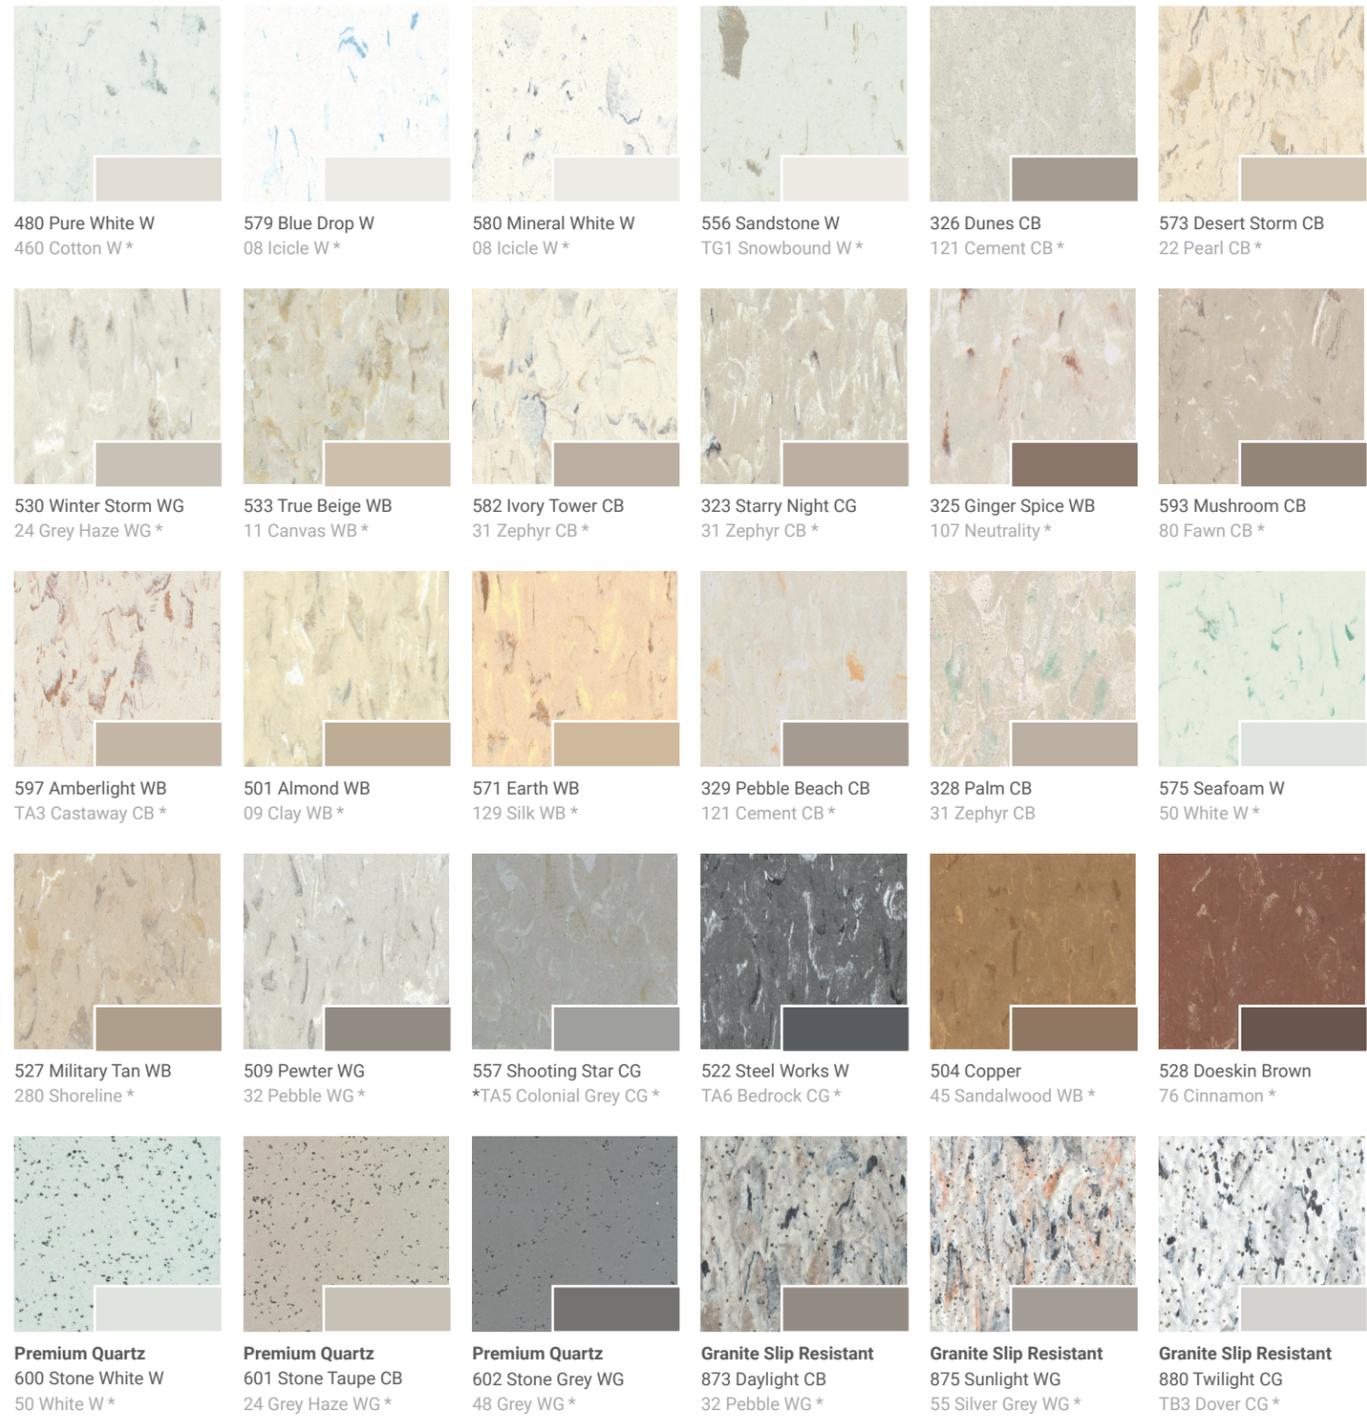

\*\*\* Solid Colors are only recommended for accents and borders.

<b>Style name</b>	<b>VCT II</b>	
Patterns	4	
Colors available	48 Standards, 3 Solid Colors***, 3 Premium Quartz, 3 Granite Slip Resistant	
Tile size	12" x 12" (305 mm x 305 mm)	
Weight/sq. ft./m <sup>2</sup>	1.4 lb. sq. ft. (6.9 kg / m <sup>2</sup> )	
Carton quantity	45 tiles = 45 sq. ft. (4.18 m <sup>2</sup> )	
Carton weight	63 lb. (29.0 kg)	
Warranty	5 year LIMITED warranty See <a href="http://tarkett.com">tarkett.com</a> for complete warranty information.	** Depending upon use of the floor
Maintenance	Conventional VCT maintenance 3-5+ coats of finish**	*** Solid Colors are only recommended for accents and borders.

## Testing

Technical Data	Standards	VCT II
Type of floor covering		Vinyl Composition Tile
Classification	ASTM F1066	Class 2 (Through Pattern - VCT, Premium Quartz) Class 1 (Solid Color - Premium Solids)
Total thickness	ASTM F386	.125" (3.18 mm)
Static load limit	ASTM F970	250 psi
Flammability	ASTM E648	Class 1 (> 0.45 W/cm <sup>2</sup> )
Smoke density	ASTM E662	< 450
Slip resistance	ASTM D2047	≥ 0.5 SCOF
Chemical resistance	ASTM F925	Pass
Size/squareness	ASTM F2055	Pass
Deflections	ASTM F1304	Pass
Impact resistance	ASTM F1265	Pass
Dimensional stability	ASTM F2199	Pass
Residual indentation	ASTM F1914	Conforms
CAN/ULC S102.2		FSR 0 / SDC 20

## Sustainability attributes

### VINYL COMPOSITION TILE

**Product emissions decarbonization:**

ClimeCo Certified Product™ decarbonization program available upon request

**Healthy materials:**

94% raw materials third-party assessed; ortho-phthalate-free

**Indoor air quality:**

FloorScore® certified; CDPH 01350 v1.2

**Transparency documentation available:**

Industry-wide EPD

**Responsible end of use management:**

Part of Tarkett's ReStart® take-back and recycling program



## Transparency documentation

At Tarkett, transparency, social responsibility and environmental stewardship aren't add-ons—they're part of everything we do. By partnering with ecomedes and mindful MATERIALS, we make it easy for you to explore our sustainable flooring product options, their product certifications, green building systems and federal standards support documents. Visit [tarkett.ecomedes.com](http://tarkett.ecomedes.com) to learn more.



**COVER:**

VCT II 480 Pure White, 705 Teal Royale, 709 Bright Blue, 710 Mariner



ReStart is Tarkett's third-party certified reclamation program.



To learn more about the ReStart program, scan the QR code or go to [commercial.tarkett.com/Restart](http://commercial.tarkett.com/Restart)

For more accurate color and pattern representation, we suggest you visit an authorized Tarkett dealer to view an actual product sample. All third-party trademarks are the property of their respective owners.